


# HOW TO DOWNLOAD DATABASES TO THE MM DEVICES


**Please ask the MM team to provide the database links.**

If you are working with ETS6, kindly request the MM staff to register you as a *Device Tester* so that you can copy and paste simultaneously within the project.

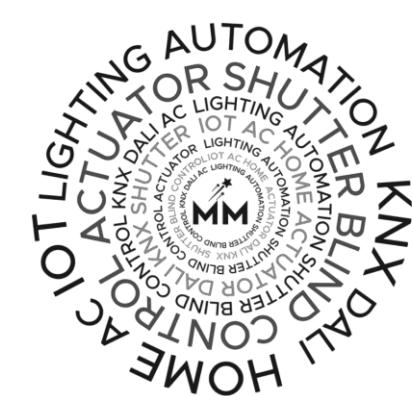



# VERY IMPORTANT

- IF YOUR CODE IS 029A:19XX OR MORE YOU CAN DOWNLOAD THE DATABASES FROM ETS CATALOG ITSELF ALL THE MODELS 029A:19XX AND MORE REGISTERED OFFICIALLY

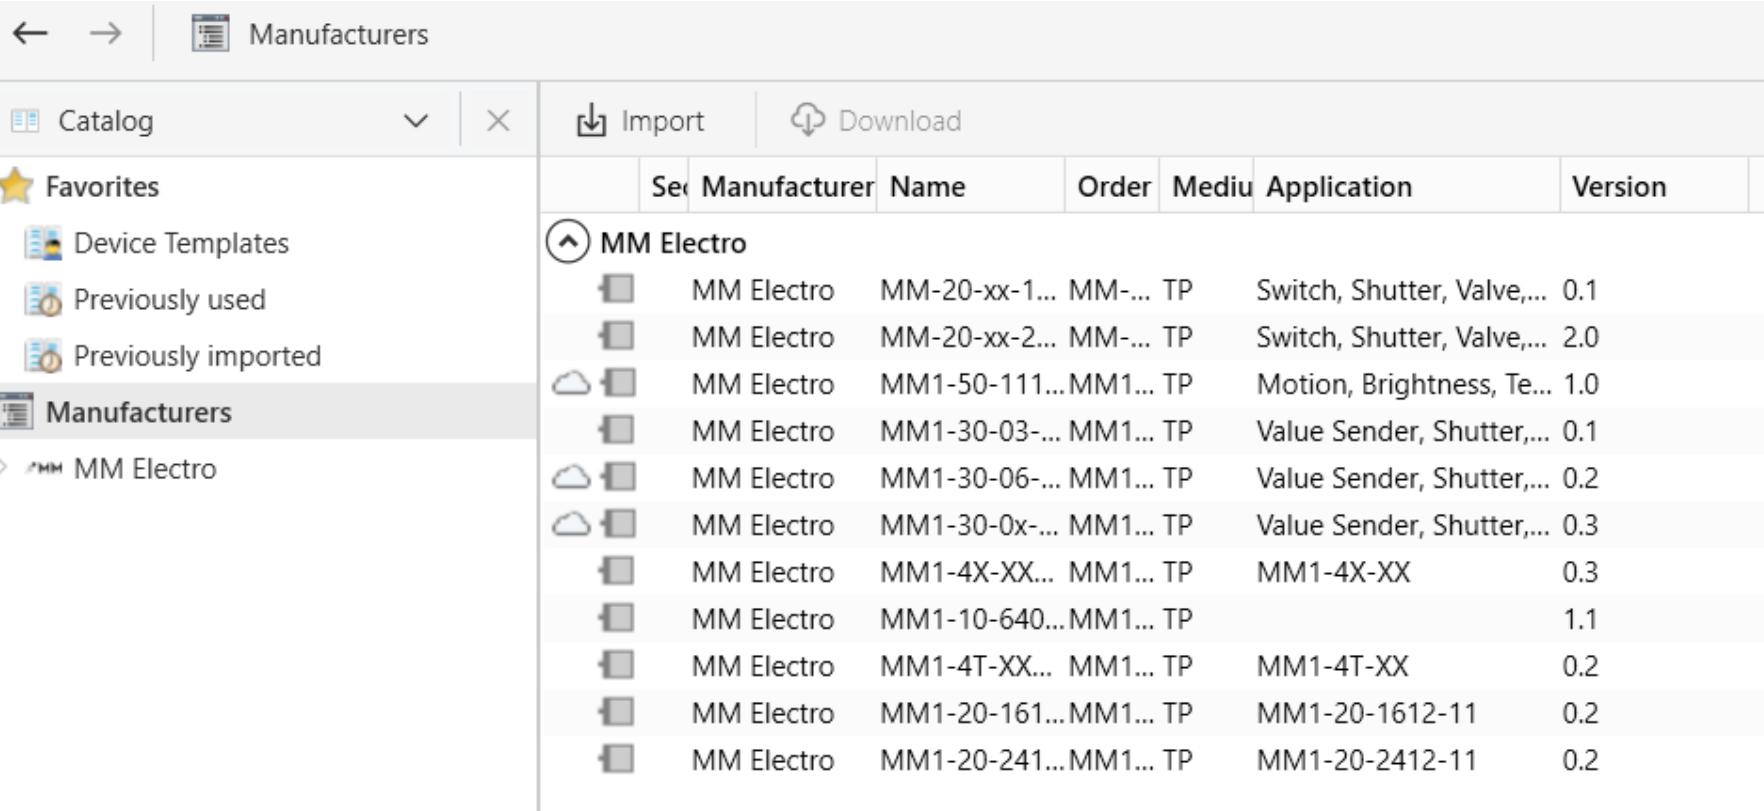


The screenshot shows the ETS Catalog Manufacturers interface. The left sidebar has 'Favorites' and 'Manufacturers' sections, with 'Manufacturers' currently selected. Under 'Manufacturers', 'MM Electro' is expanded, showing a list of device models. The main area is a table with columns: Seq, Manufacturer, Name, Order, Medium, Application, and Version. The data is as follows:

Seq	Manufacturer	Name	Order	Medium	Application	Version
▲ MM Electro						
1	MM Electro	MM-20-xx-1...	MM-...	TP	Switch, Shutter, Valve,...	0.1
2	MM Electro	MM-20-xx-2...	MM-...	TP	Switch, Shutter, Valve,...	2.0
3	MM Electro	MM1-50-111...	MM1...	TP	Motion, Brightness, Te...	1.0
4	MM Electro	MM1-30-03...	MM1...	TP	Value Sender, Shutter,...	0.1
5	MM Electro	MM1-30-06...	MM1...	TP	Value Sender, Shutter,...	0.2
6	MM Electro	MM1-30-0x...	MM1...	TP	Value Sender, Shutter,...	0.3
7	MM Electro	MM1-4X-XX...	MM1...	TP	MM1-4X-XX	0.3
8	MM Electro	MM1-10-640...	MM1...	TP		1.1
9	MM Electro	MM1-4T-XX...	MM1...	TP	MM1-4T-XX	0.2
10	MM Electro	MM1-20-161...	MM1...	TP	MM1-20-1612-11	0.2
11	MM Electro	MM1-20-241...	MM1...	TP	MM1-20-2412-11	0.2

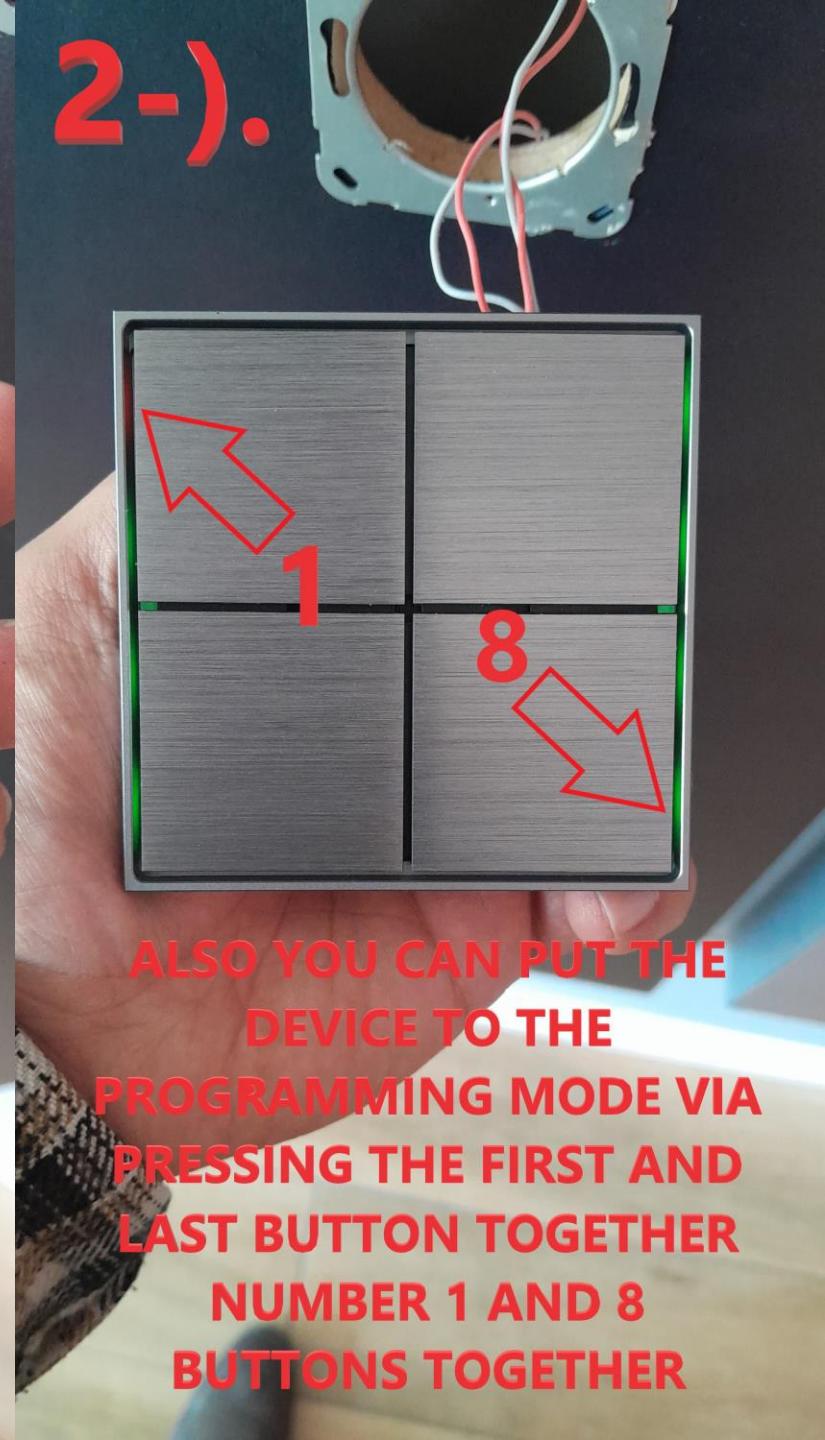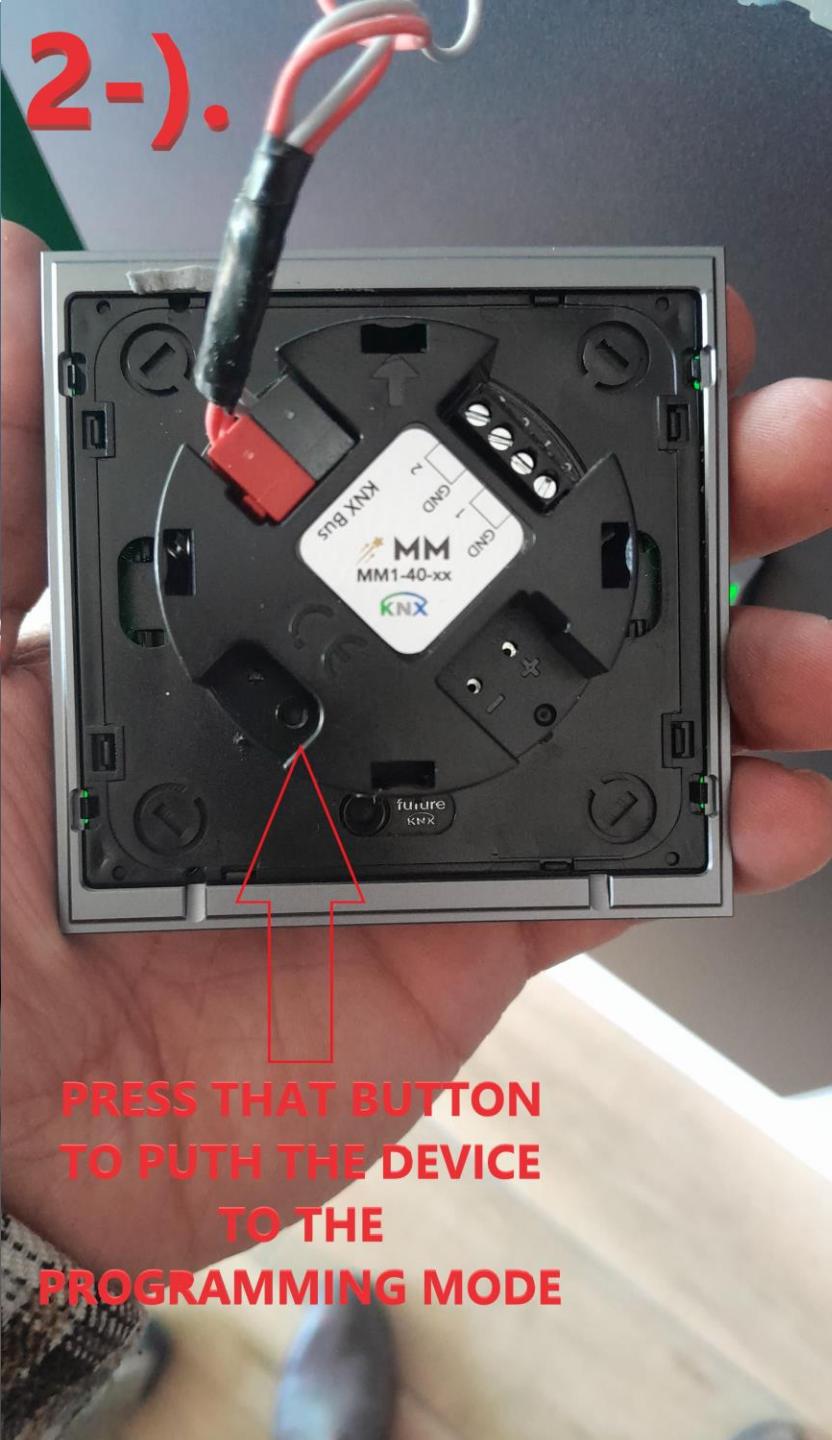

3-).

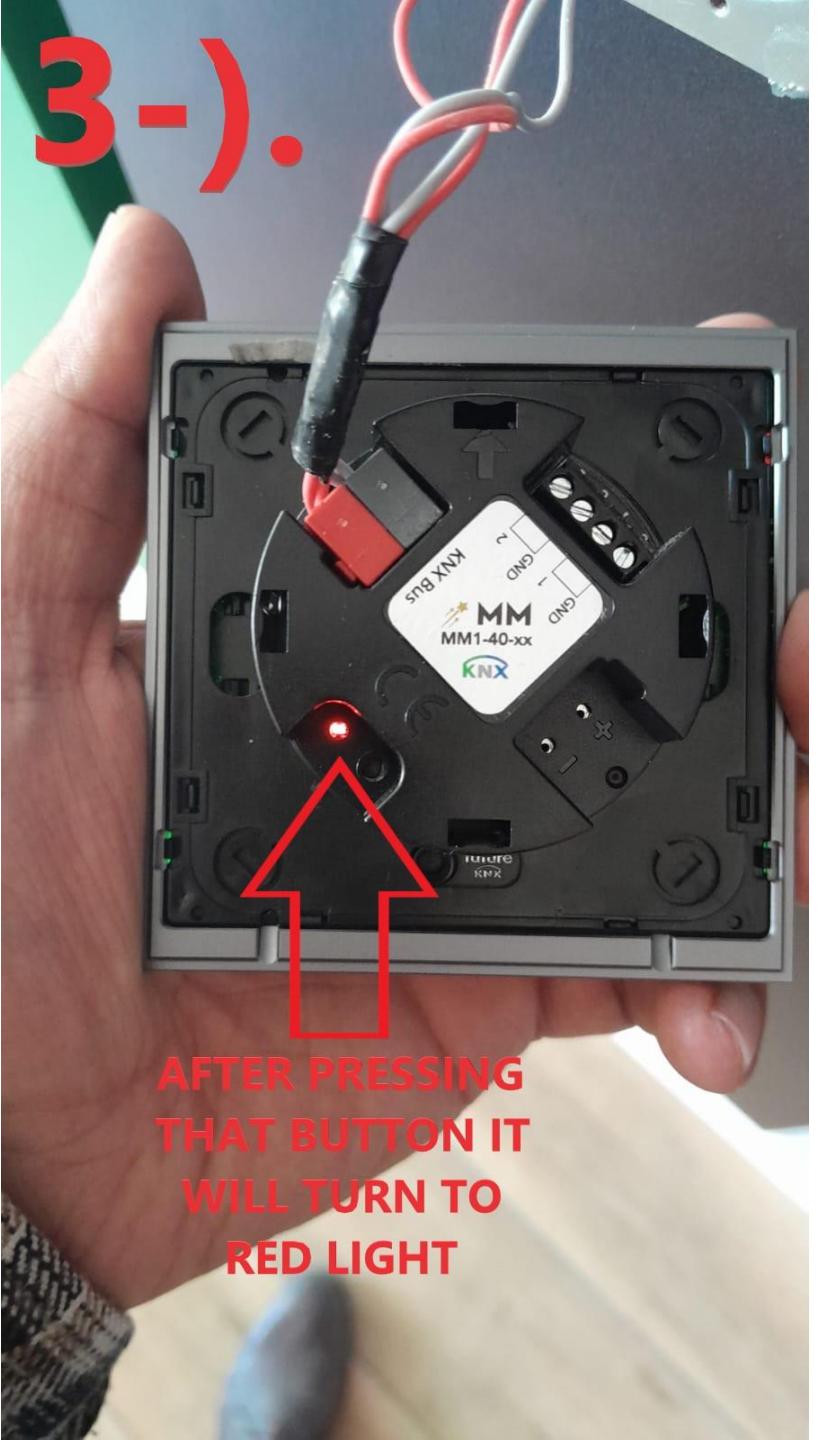

4-).



Diagnostics

Monitor

Group Monitor

Bus Monitor

ETS Bus Activity

Diagnostics

Device Info

Individual Addresses

Programming Mode

Individual Address Check

Line Scan



Device(s) in Programming Mode

Directly reachable

Also in specific line/segment

Whole installation (might take some time)

Start

Stop



Used interface address 0.1.47

Responses: 1

Address	Hop Count
0.1.35	6

**PRESS THE  
PROGRAMMING MODE  
AND IT WILL FIND THE  
DEVICE ADDRESS**



ETS6 Professional  
Version 6.3.1 (Build 8272)



MMShowroom



6-)  
Diagnostics

Diagnostics

Monitor

Group Monitor

Bus Monitor

ETS Bus Activity

Diagnostics

Device Info

0.1.35 Dora series 4/8 gang KNX keypad with...

Individual Addresses

Programming Mode

Individual Address Check

Line Scan

Read Device Info

Individual address 0.1.35

Read group communication part

Read



**WRITE THE  
ADDRESS TO THE  
DEVICE INFO  
OPTION**



ETS6 Professional  
Version 6.3.1 (Build 8272)



MMShowroom



Diagnostics

– Monitor

Group Monitor

Bus Monitor

ETS Bus Activity

– Diagnostics

– Device Info

0.1.35 Dora series 4/8 gang KNX keypad wit...

– Individual Addresses

Programming Mode

Individual Address Check

Line Scan

Device Info of Device 0.1.35

**WE NEED THIS CODE**

**"029A:171....."**

General

Item	Value
Mask Version	0705
Individual Address	0.1.35
Device Manufacturer	MM Electro
Order Number	\$4D5338532E3131000000
Serial Number	<u>029A:171C0EOE</u>
Hardware Type	\$465452050EOE
Firmware Version	[0] 1.0
Programming Mode	On





Drive

8-).



Drive'da arayın



+ Yeni

Ana sayfa

Drive'im

Bilgisayarlar

Benimle paylaşılanlar

En son

Yıldızlı

Spam

Çöp kutusu

Depolama alanı

69,73 GB/100 GB

kullanılıyor

Daha fazla depolama  
alanı alBenimle paylaşılanlar > MMTurkey > 14\_Tech > All KNX Databases ▾

Tür ▾

Kullanıcılar ▾

Değiştirilme: ▾

Kaynak ▾

Adı ↑

Sahibi

Son değiştirilme tarihi ▾

Dosya boyut

AC Kbox Mitsubishi\_TB15 Databases

ben

4 Eyl 2024 ben

AC Kbox Samsung\_Daikin\_MittCN105 Databases

ben

4 Eyl 2024 ben

MM Bluetooth Gateway Databases

ben

4 Eyl 2024 ben

MM DORA Keypad Databases

← THIS IS OUR

DEVICE YOU MAY  
CHOOSE THE  
TITLE REGARDING  
YOUR DEVICE

MM DORA Thermostat Databases

ben

4 Eyl 2024 ben

MM Multi Sensor Database

ben

4 Eyl 2024 ben

MM NightSky-1 Series Databases

ben

4 Eyl 2024 ben

MM Snow-1 Series ETS Databases

ben

4 Eyl 2024 ben

MM Universal Interfaces

ben

4 Eyl 2024 ben

↑ FROM THE LINK ON THE  
FIRST PAGE REACH THIS PAGE



Drive

Drive'da arayın

9-).

029A:171C SO ITS

MATCHING NUMBER 1

Benimle paylaşılanlar &gt; AIKMX Databases &gt; MM DORA Keypad Data... ▾

+ Yeni

Ana sayfa

Drive'im

Bilgisayarlar

Benimle paylaşılanlar

En son

Yıldızlı

Spam

Çöp kutusu

Depolama alanı

69,73 GB/100 GB

kullanılıyor

Daha fazla depolama  
alanı alDATABASE SO WE WILL  
DOWNLOAD THIS

İ Yapay zekayı doğrudan en sevdığınız uygulamalarda deneyin Taslak oluşturmak ve içeriklerinizi geliştirmek için Gemini'ı kullanın. Ayrıca 2 ay boyunca £719,99 £359,99 nesil yapay zekasıyla hiss sağıyan Gemini Pro'dan yararlanın.

Adı	↑	Sahip	Son değiştirilme tarihi	Dosya türü
1-). 029A:17XXXXXXXX till --- 029A:18XX(is not included)		ben	3 Nis 2025 ben	
2-). 029A:1802XXXXXXXX till --- 029A:180D(is included)		ben	3 Nis 2025 ben	
3-). 029A:180EXXXXXXXX till --- 029A:181A(is included)		ben	3 Nis 2025 ben	
4-). 029A:181BXXXXXXXX till --- 029A:1829(is included) -> Build Date 08/08/2024 mentioned		ben	3 Nis 2025 ben	
5-). 029A:1830XXXXXXXX till --- 029A:1854(is included)-> Build Date 15/10/2024 mentioned		ben	3 Nis 2025 ben	
6-). 029A:1854XXXXXXXX till --- 029A:19XX(is not included)-> Build Date 15/01/2025 mentioned		ben	3 Nis 2025 ben	
7-). 029A:19XXXXXXXX -> Build Date 26/03/2025 mentioned on ETS NEW TOPIC		ben	3 Nis 2025 ben	
Old Files		ben	3 Nis 2025 ben	

AS THE CODE WE

GOT FROM

DEVICE INFO WE

NEED TO FIND

THE CORRECT

CODE FOR MATCH

FROM THIS LIST.

Drive

10-).

Drive'da arayın

Benimle paylaşılanlar > ... > MM DORA Keypad Dat... > 1-). 029A:17XXXXXXX ti... > 

+ Yeni

Ana sayfa

Drive'im

Bilgisayarlar

Benimle paylaşılanlar

En son

Yıldızlı

Spam

Çöp kutusu

Depolama alanı

69,73 GB/100 GB  
kullanılıyor


Daha fazla depolama alanı al


Tür Kullanıcılar Değiştirilme: Kaynak

İ Yapay zekayı doğrudan en sevdığınız uygulamalarda deneyin Taslak oluşturmak ve içeriklerinizi geliştirmek için Gemini'ı kullanın. Ayrıca 2 ay boyunca \$719,99 \$359,99 karşılığında Google'in yeni nesil yapay zekasına erişim sağlayan Gemini Pro'dan yararlanın.

Teklifi kullan

Adı	Sahibi	Son değiştirilme tarihi	Dosya boyutu	İ
[Keypad] MMX-4X_2023_09_14 (17XX).knxproj	ben	3 Nis 2025 volo.al	169 KB	    

 **DOWNLOAD  
FROM THE LINK**

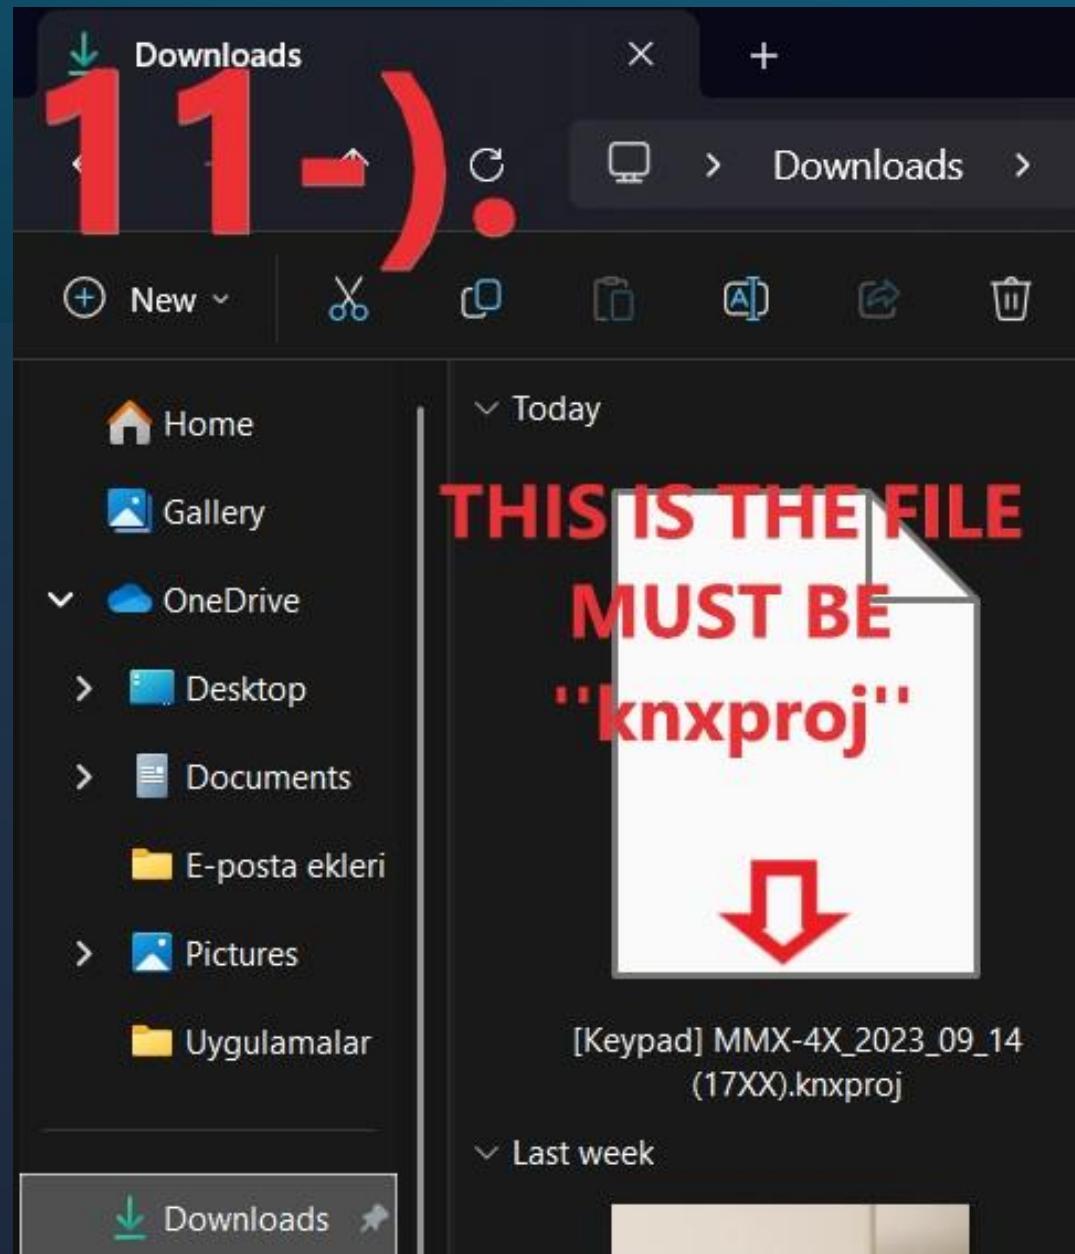

KNX ETS6 Professional  
Version 6.3.1 (Build 8272)

MMShowroom  
Diagnostics

Want to search for Projects?

12-)

← →

Jigsaw PRO KNX - New GUI  
ComfortClick (Slovenia) | 01/06/2025

2 BEST KNX PRODUCT AWARD


INTERRA iX2  
The Interra iX2 Touch Panel  
Interra Technology Otomasyon A.S. (Turkey) | 03/03/2025


KNX DALI 2 Gateway  
Albrecht Jung GmbH & Co. KG (Germany) | 03/04/2025

**IMPORT THAT PROJECT** 

12 Local Projects →

Start Project Wizard + New Project Import Project

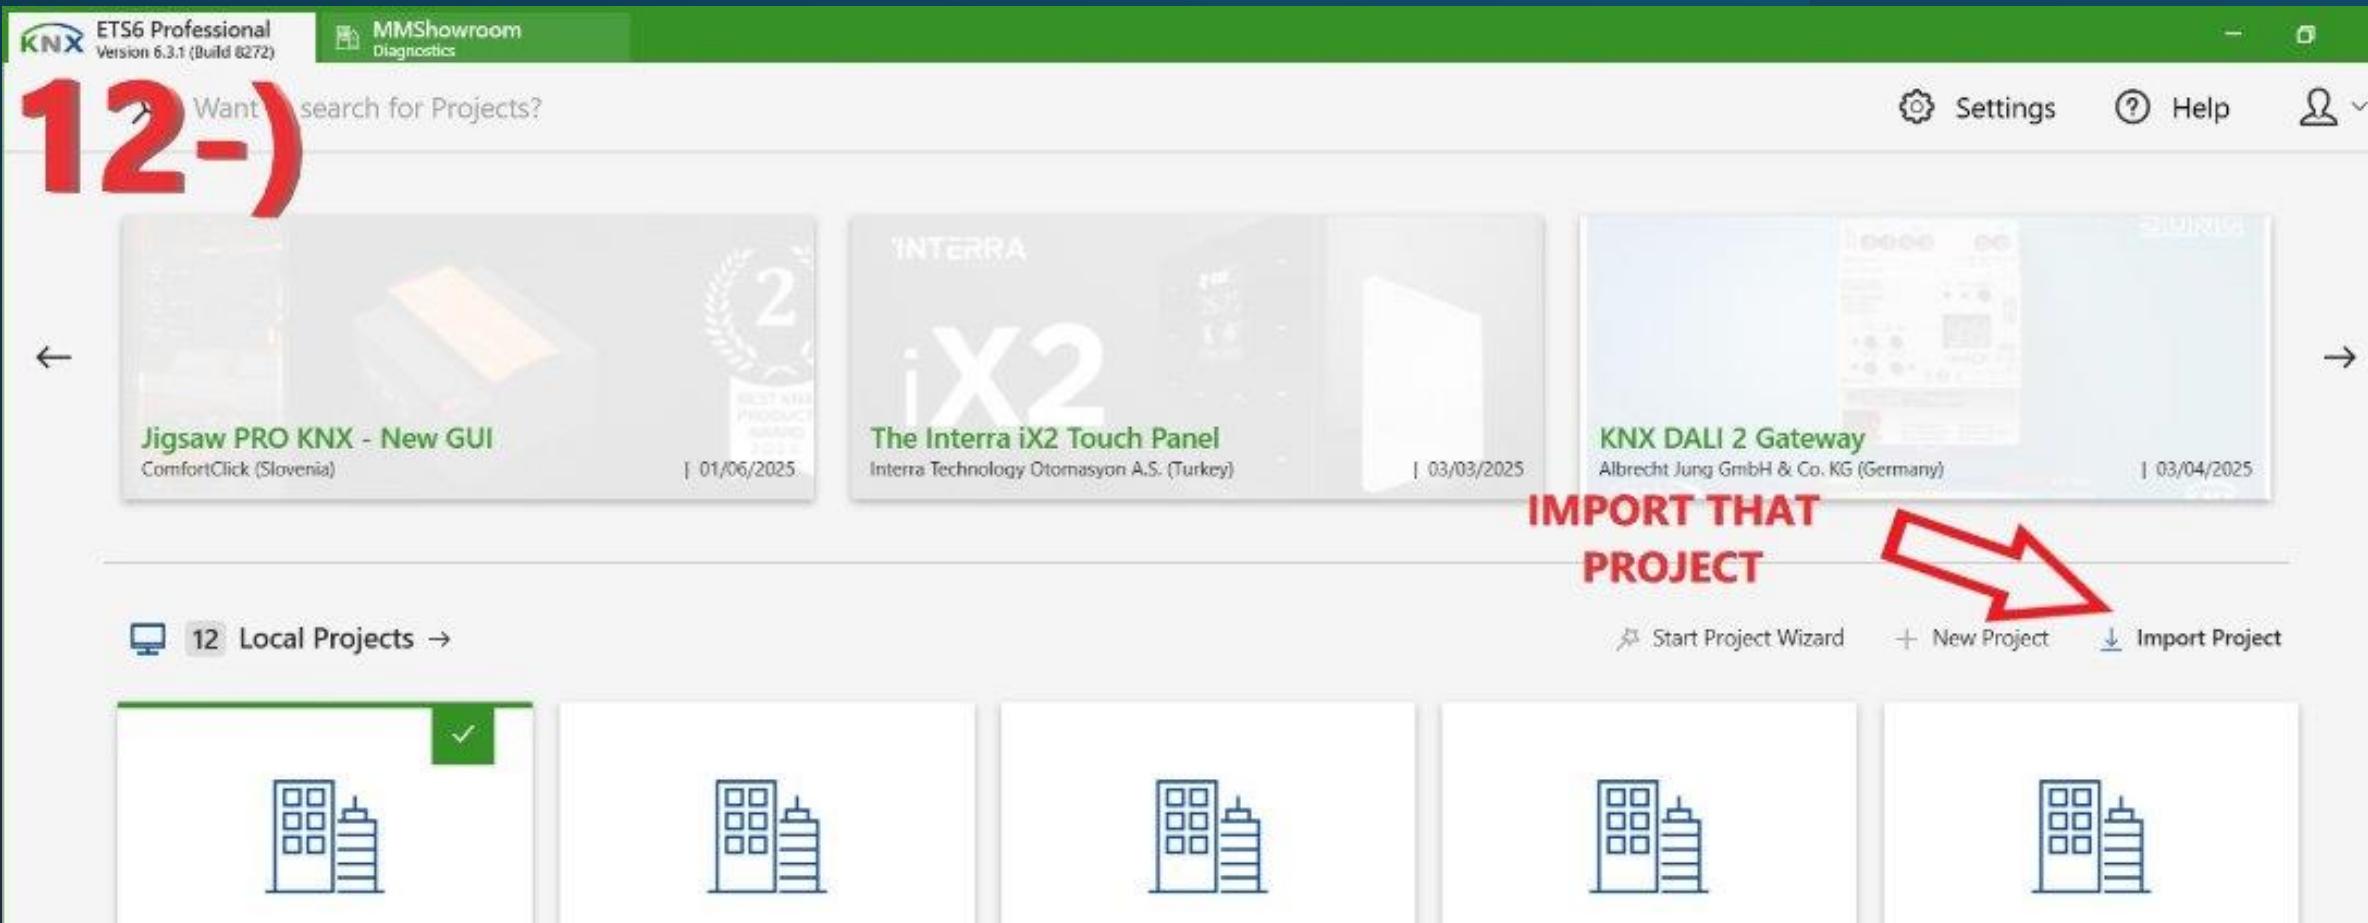

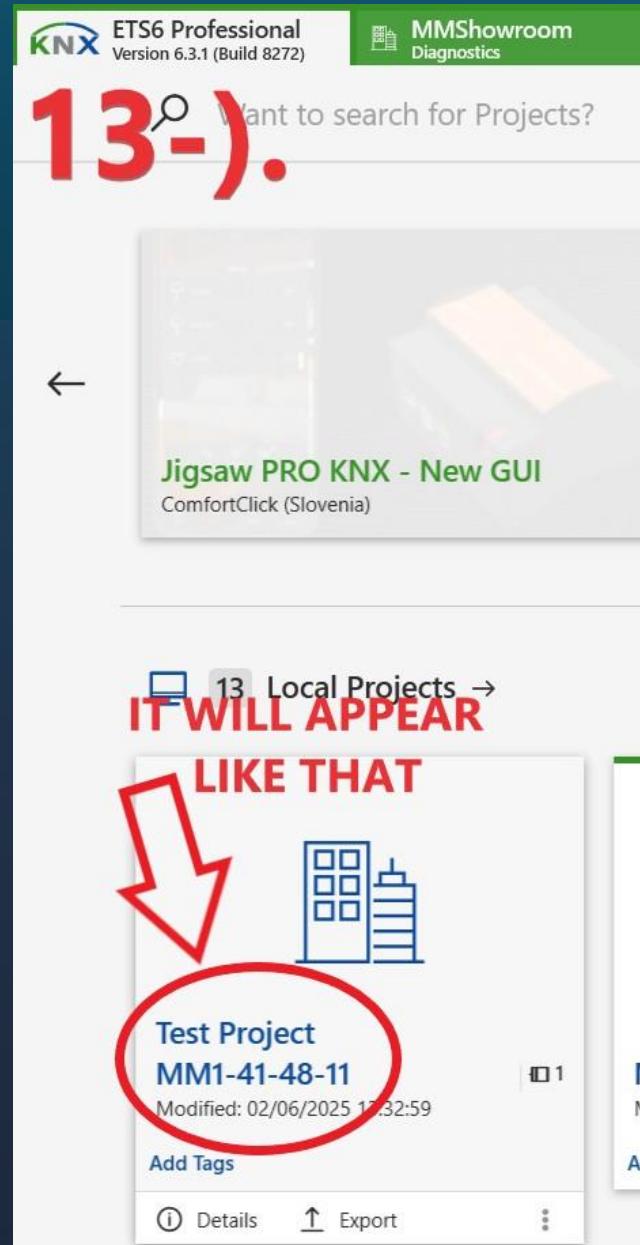

14-).

KNX ETS6 Professional  
Version 6.3.1 (Build 8272)

MMShowroom  
Diagnostics

Test Project MM1... +

Add Buildings | Delete | Download | Diagnostics | U

Buildings

Buildings 1 | Building Parts 0

Search Folders

0 Cabinets

0 Download required

1 Not assigned to a room


Buildings

Trades

Devices 1 | Building Parts 0

Se	Address	Room	Description	Application Program	Adr	Prg	Par	Grp	Cfg	Manufacturer	Serial N
⚠	---			MM1-41-48-11	-	-	-	-	-	MM Electro	

IT WILL BE IN  
THIS FILE



15-)

Search Folders / Not assigned to a room / 1.1.1 Dora Series 4 Gang

Add | Delete | Download | Diagnostics | Undo | Panels | Help | Info

Buildings Search Folders Cabinets 0 Download required 1 Not assigned to a room 1.1.1 Dora Series 4 Gang Buildings Trades

Channels 5 Group Objects 0 Parameters

Number Name Object Function Linked with Group Address Length C R W T U Data Type Priority

Search

Properties

Settings


Unregistered Device KNX compatibility is not guaranteed


Learn more

Name Dora Series 4 Gang

Individual Address 1.1 . 1

Description

**GIVE AN ADDRESS TO THE DEVICE** 

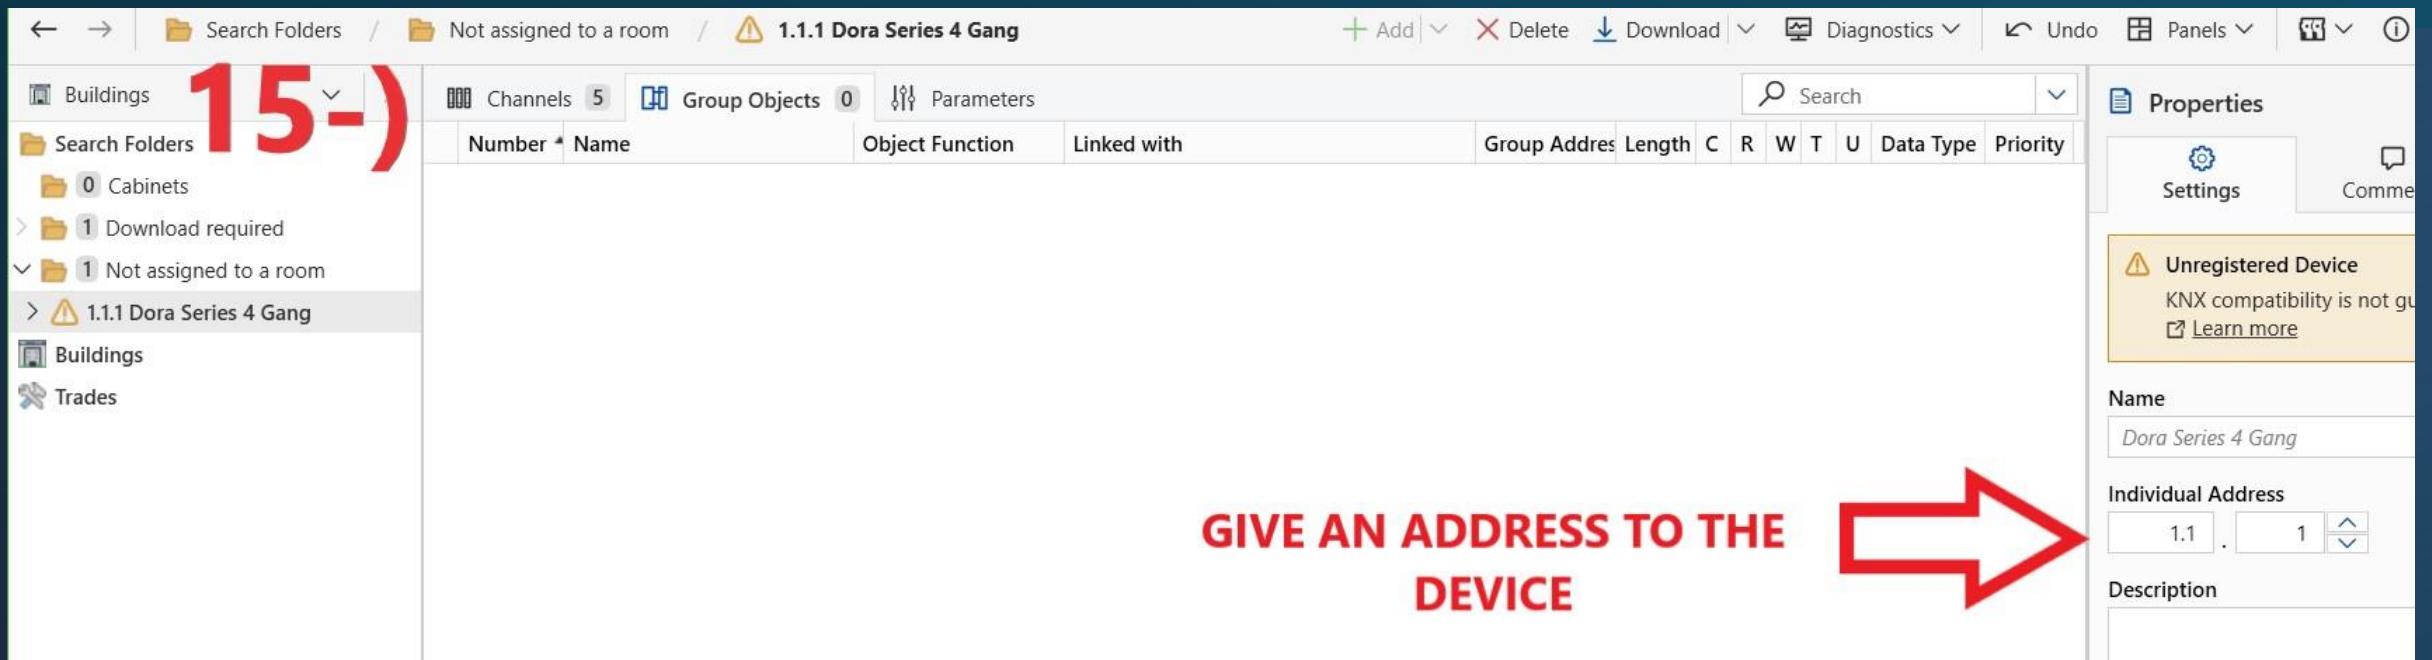

16-)

Download All

Partial download

Download Individual Address

Overwrite Individual Address

Download Application

**DOWNLOAD ALL**  
SOMETIMES IT  
CANT BE  
DOWNLOADED IF  
THIS HAPPEN  
FIRST  
DOWNLOAD THE  
ADDRESS AND  
THEN THE  
APPLICATION

Properties

Search Folders / Not assigned to a room / 1.1.1 Dora Series 4 Gang

Add | Delete | Download | Diagnostics | Undo | Panels | Panels | i

Buildings | Search Folders | Cabinets | Download required | Not assigned to a room | 1.1.1 Dora Series 4 Gang

Channels 5 | Group Objects 0 | Parameters

Number Name Object Function Linked with Group Address Length C R W T U Data Type Priority

Search

Properties

Settings

Unregistered Device

KNX compatibility is not guaranteed

Learn more

Name: Dora Series 4 Gang

Individual Address: 1.1 . 1

Description

Last Modified

Last Downloaded

Serial Number

Status: Unknown

Groups

Find and Replace

Workspaces

Todo Items

Pending Operations

17-).  
Properties  
Groups

Find and Replace

Workspaces

Todo Items

Pending Operations

Active

Clear History

1.1.1 Dora Series 4 Gang

Download(All): Finished

AND  
THATS ALL  
YOU CAN  
USE THE  
DEVICE