




KNX


Bus device

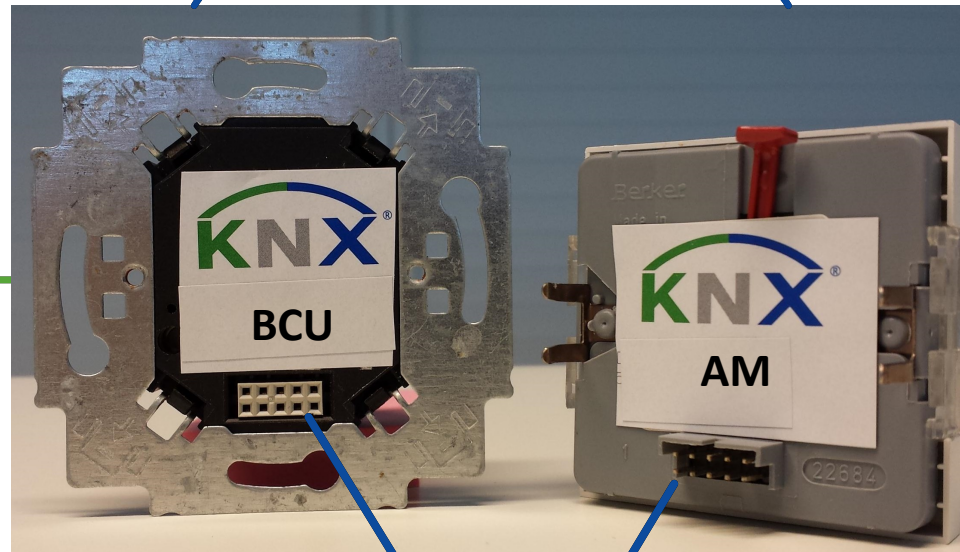


PEI

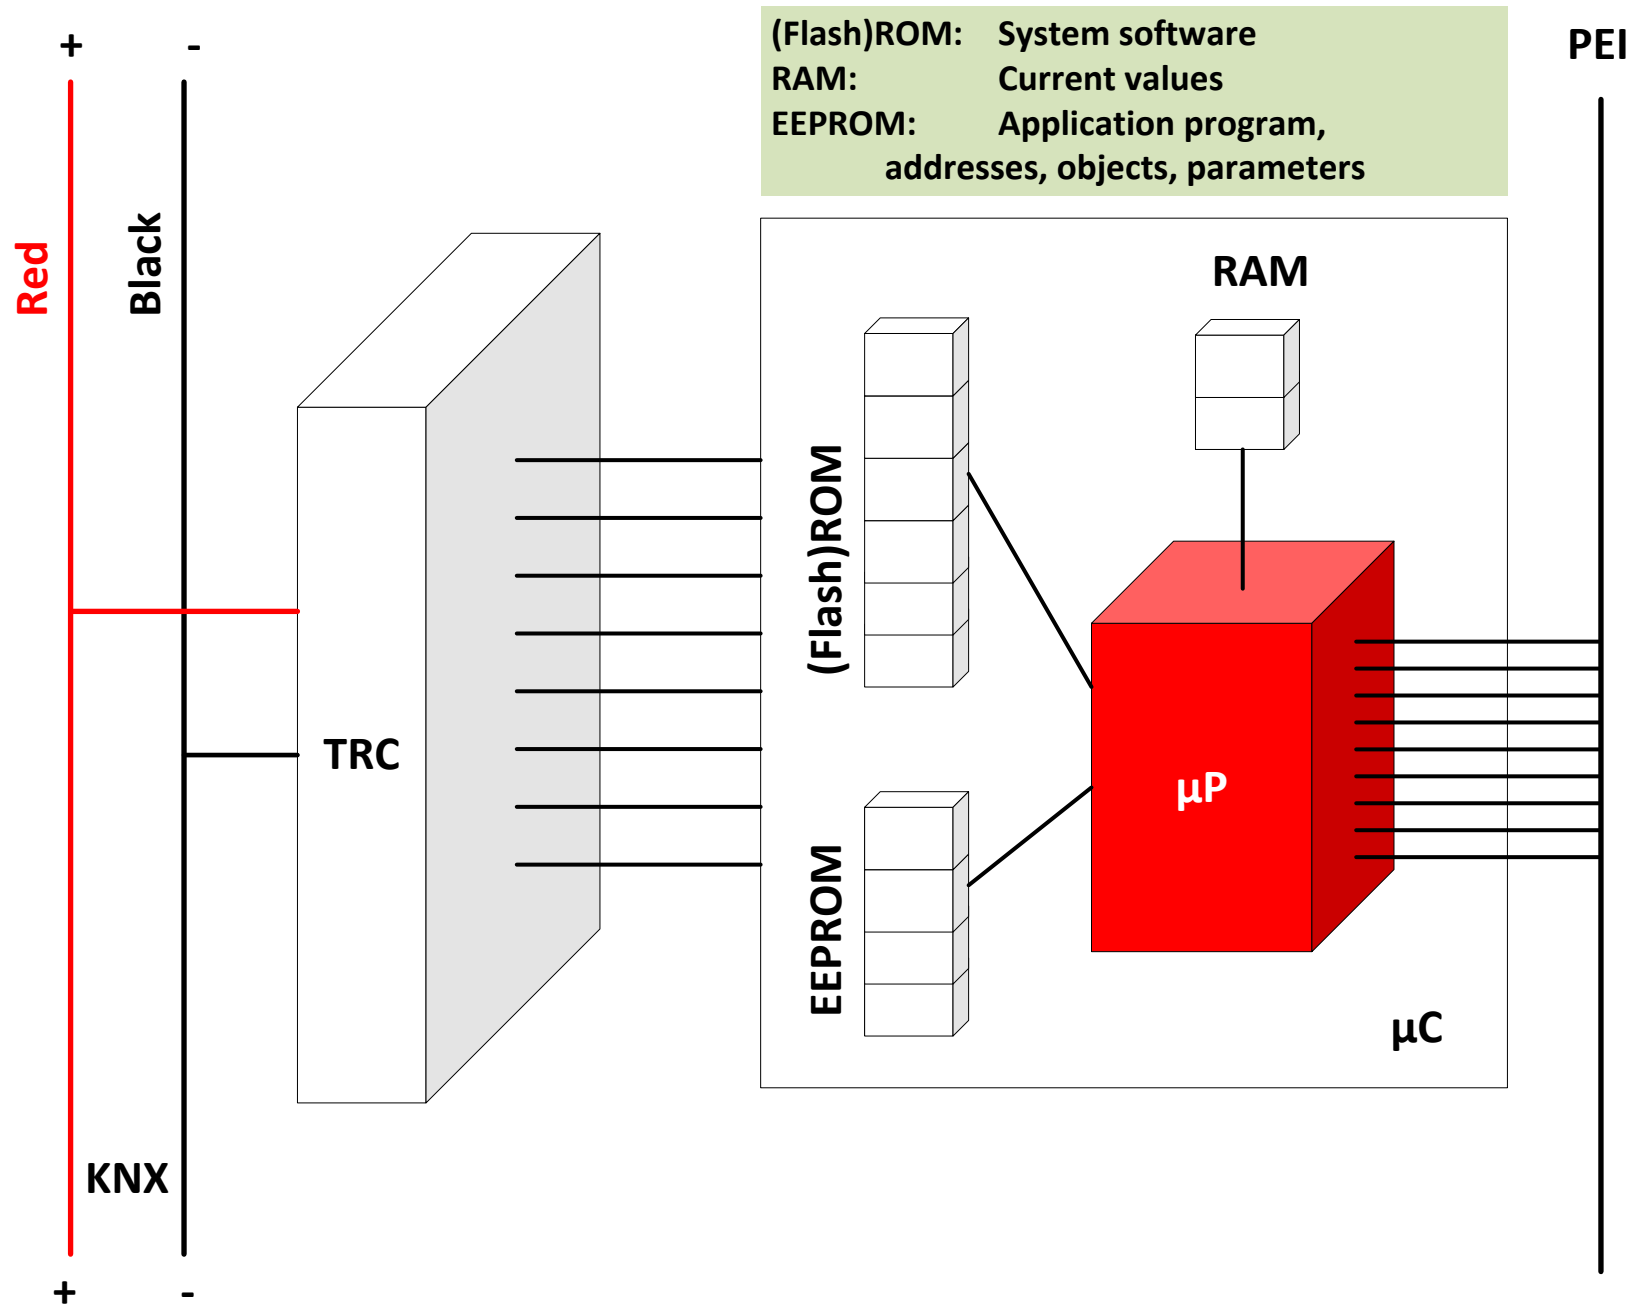

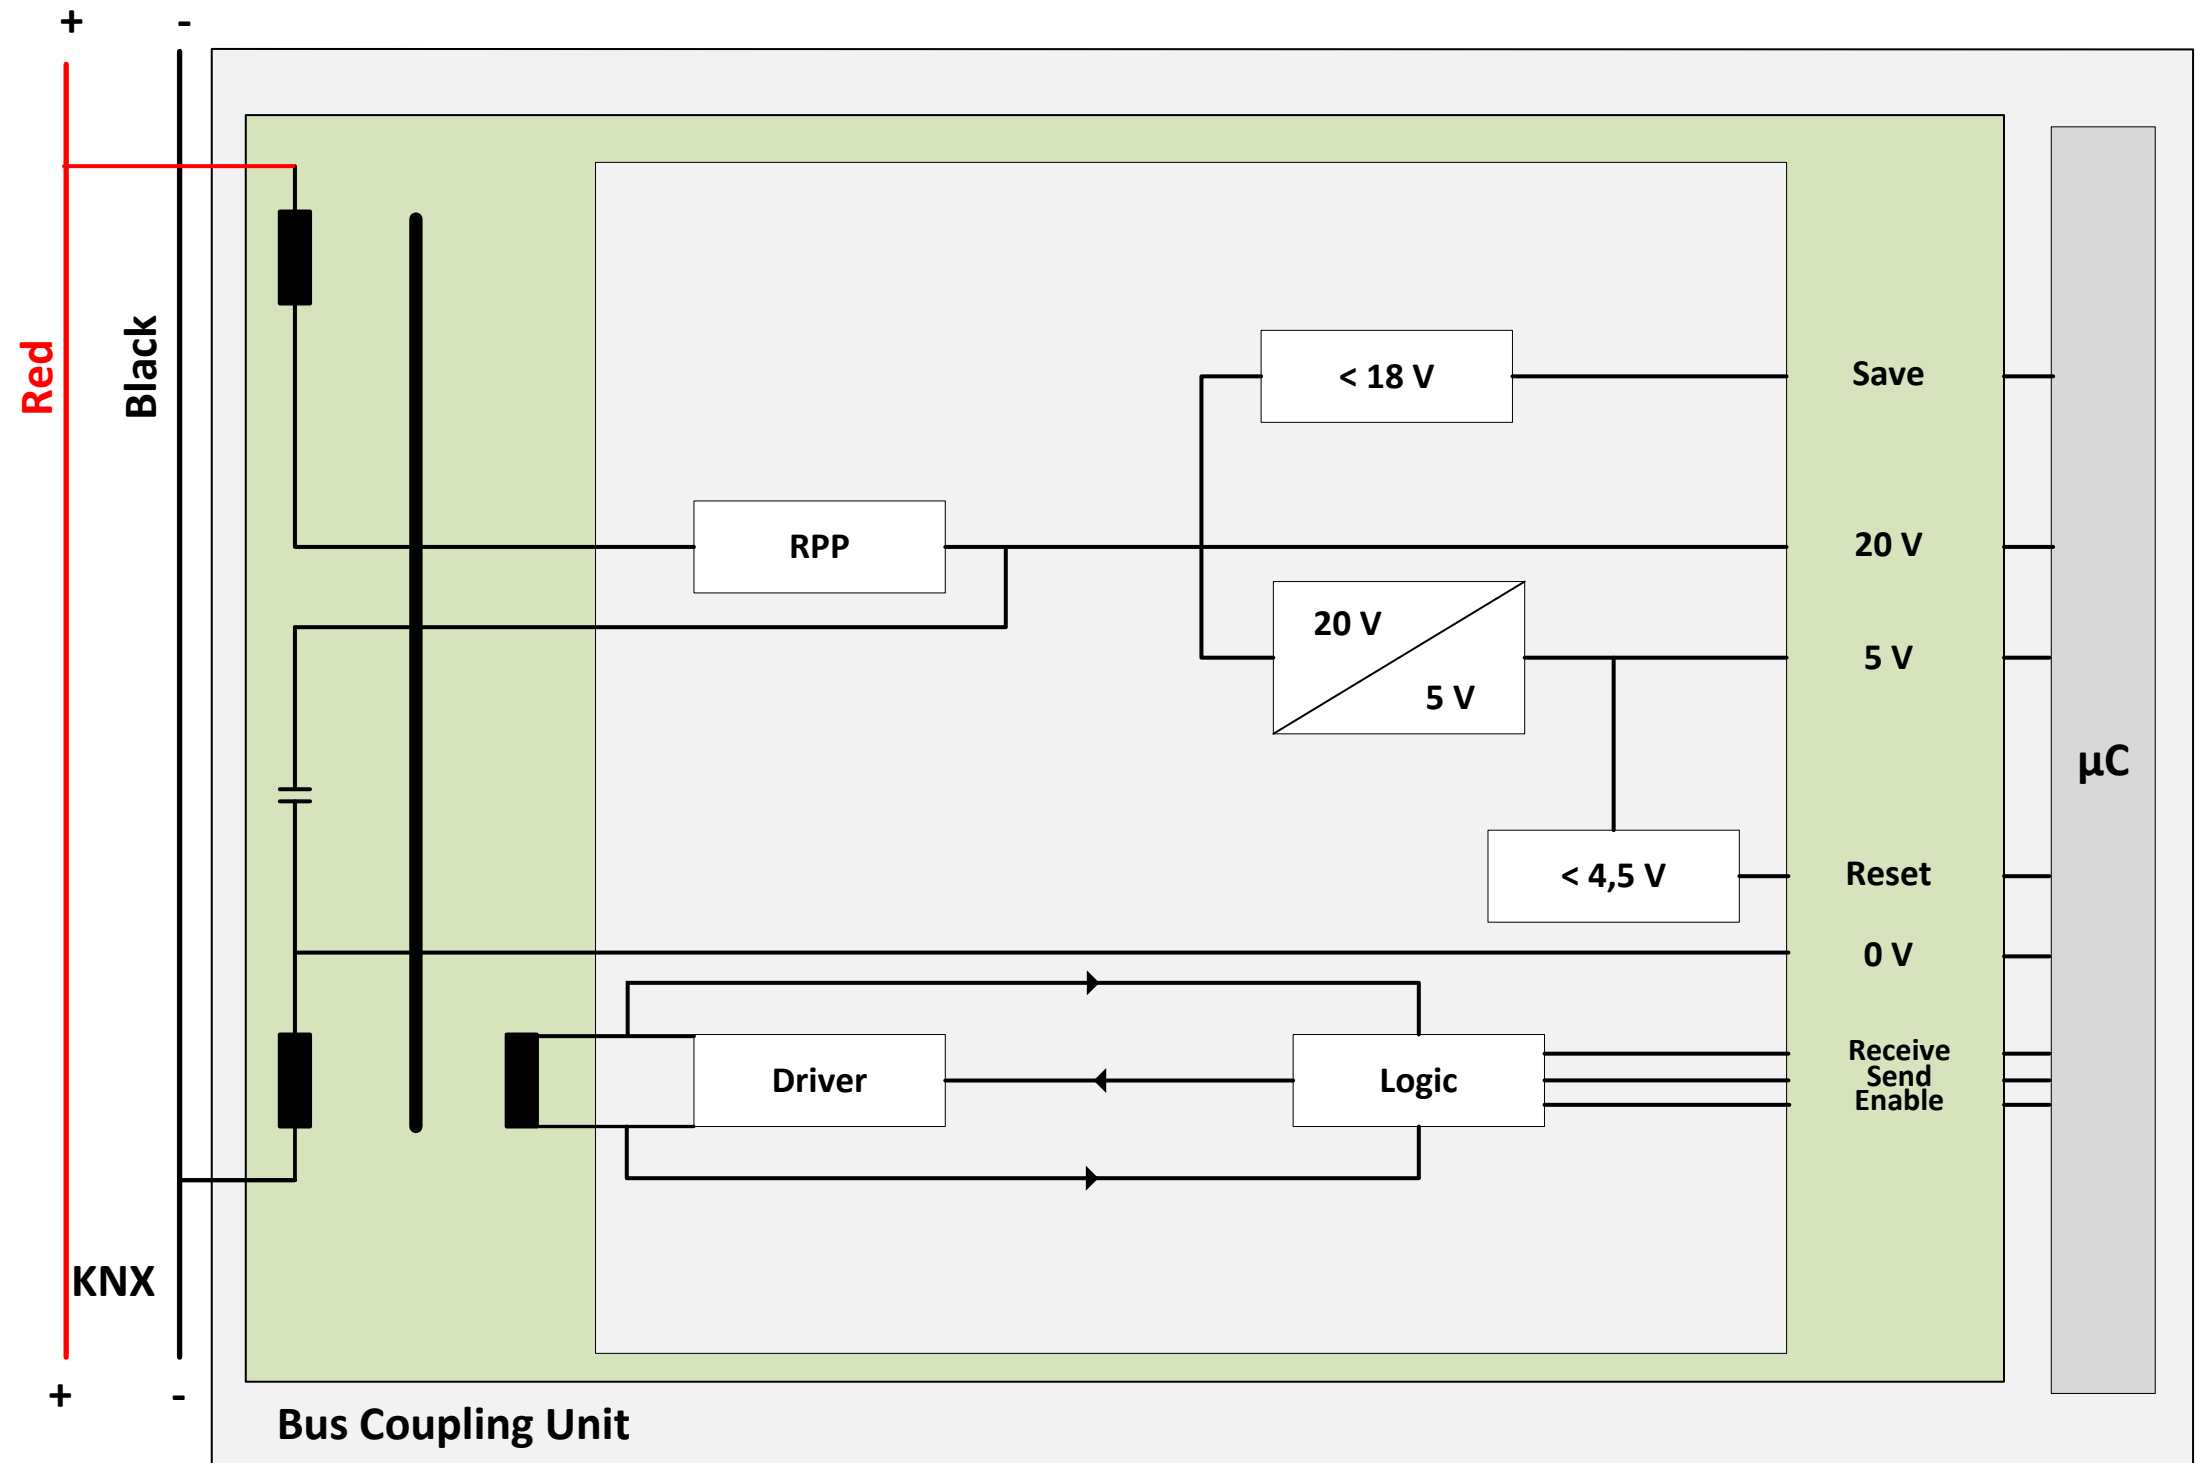


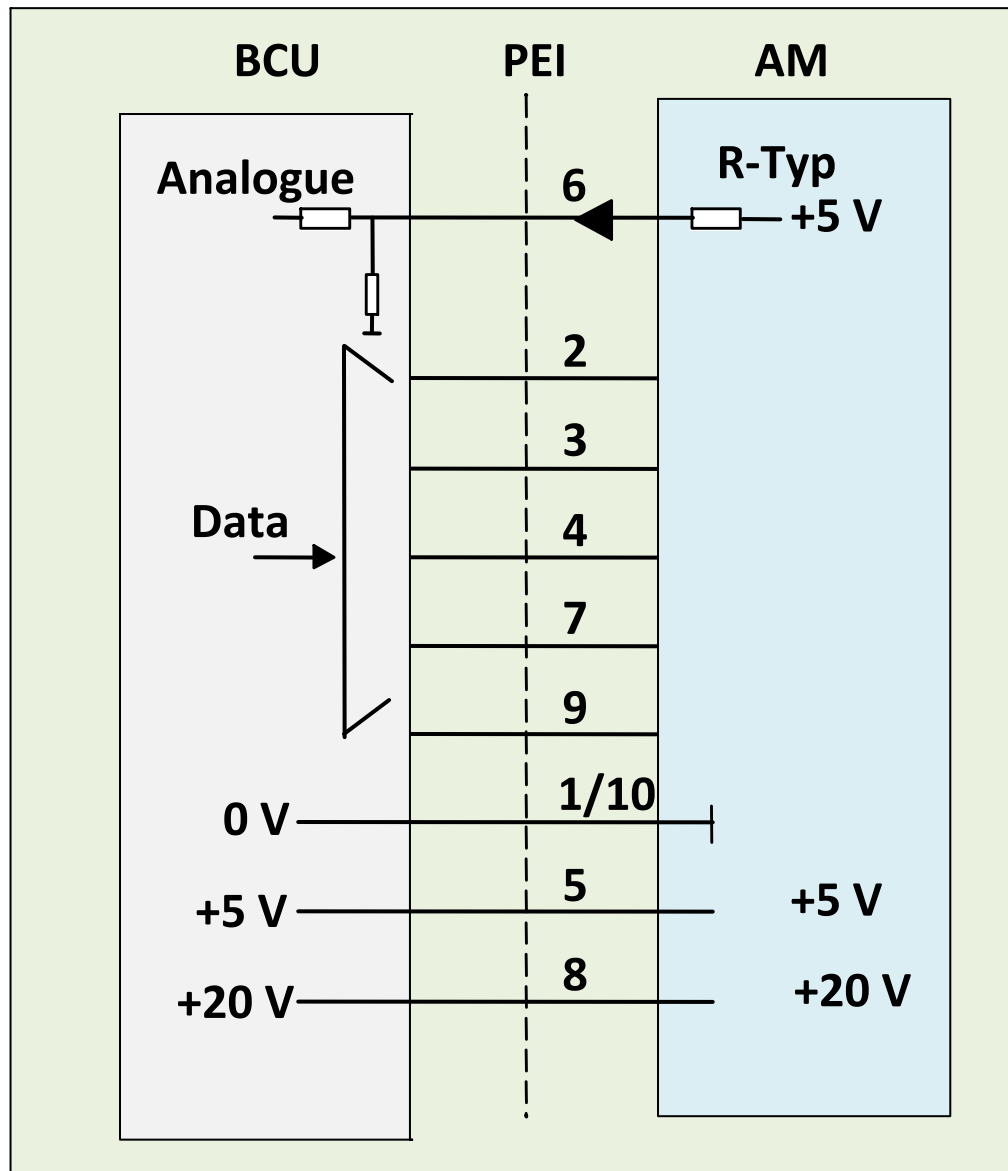




Type	Voltage [V]	Function
0	0,00	No application module connected
2	0,50	4 binary (analogue) inputs, 1 binary output
4	1,00	2 binary (analogue) inputs, 2+1 binary outputs
6	1,50	3 binary (analogue) inputs, 1+1 binary outputs
12	3,00	serial synchronous
14	3,50	serial synchronous fixed length
16	4,00	serial asynchronous
19	4,75	4+1 binary outputs
20	5,00	Download

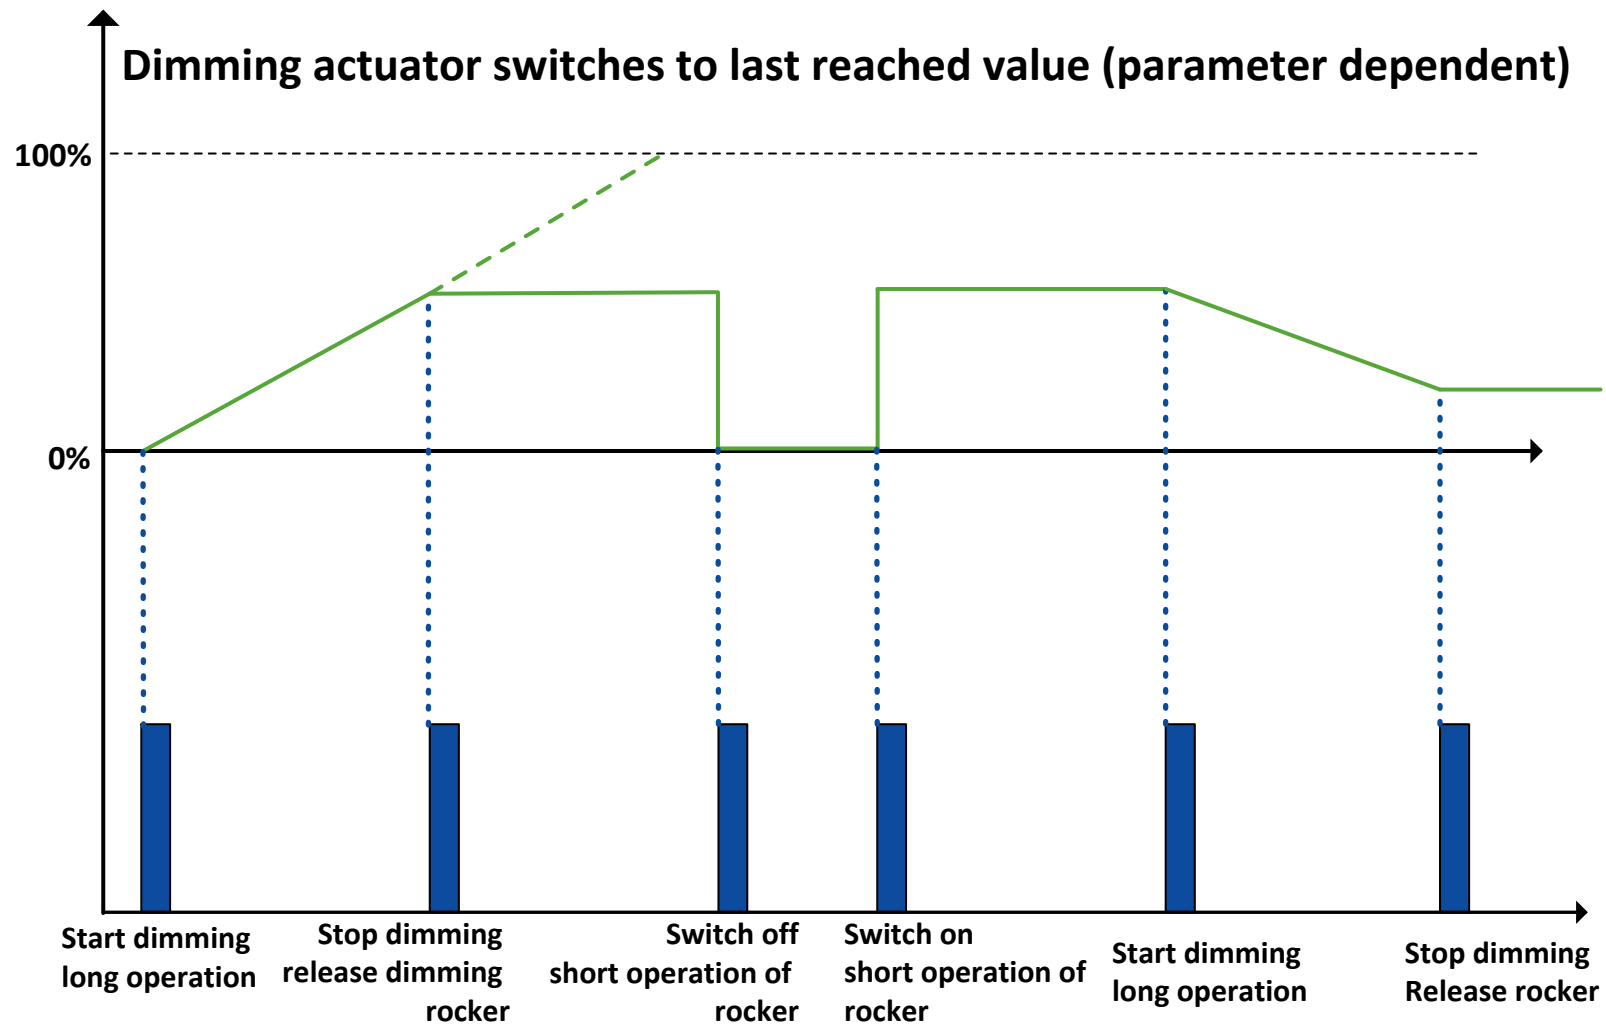


Dimming speed of the actuator shall be adapted to the cyclical transmission of dimming telegrams

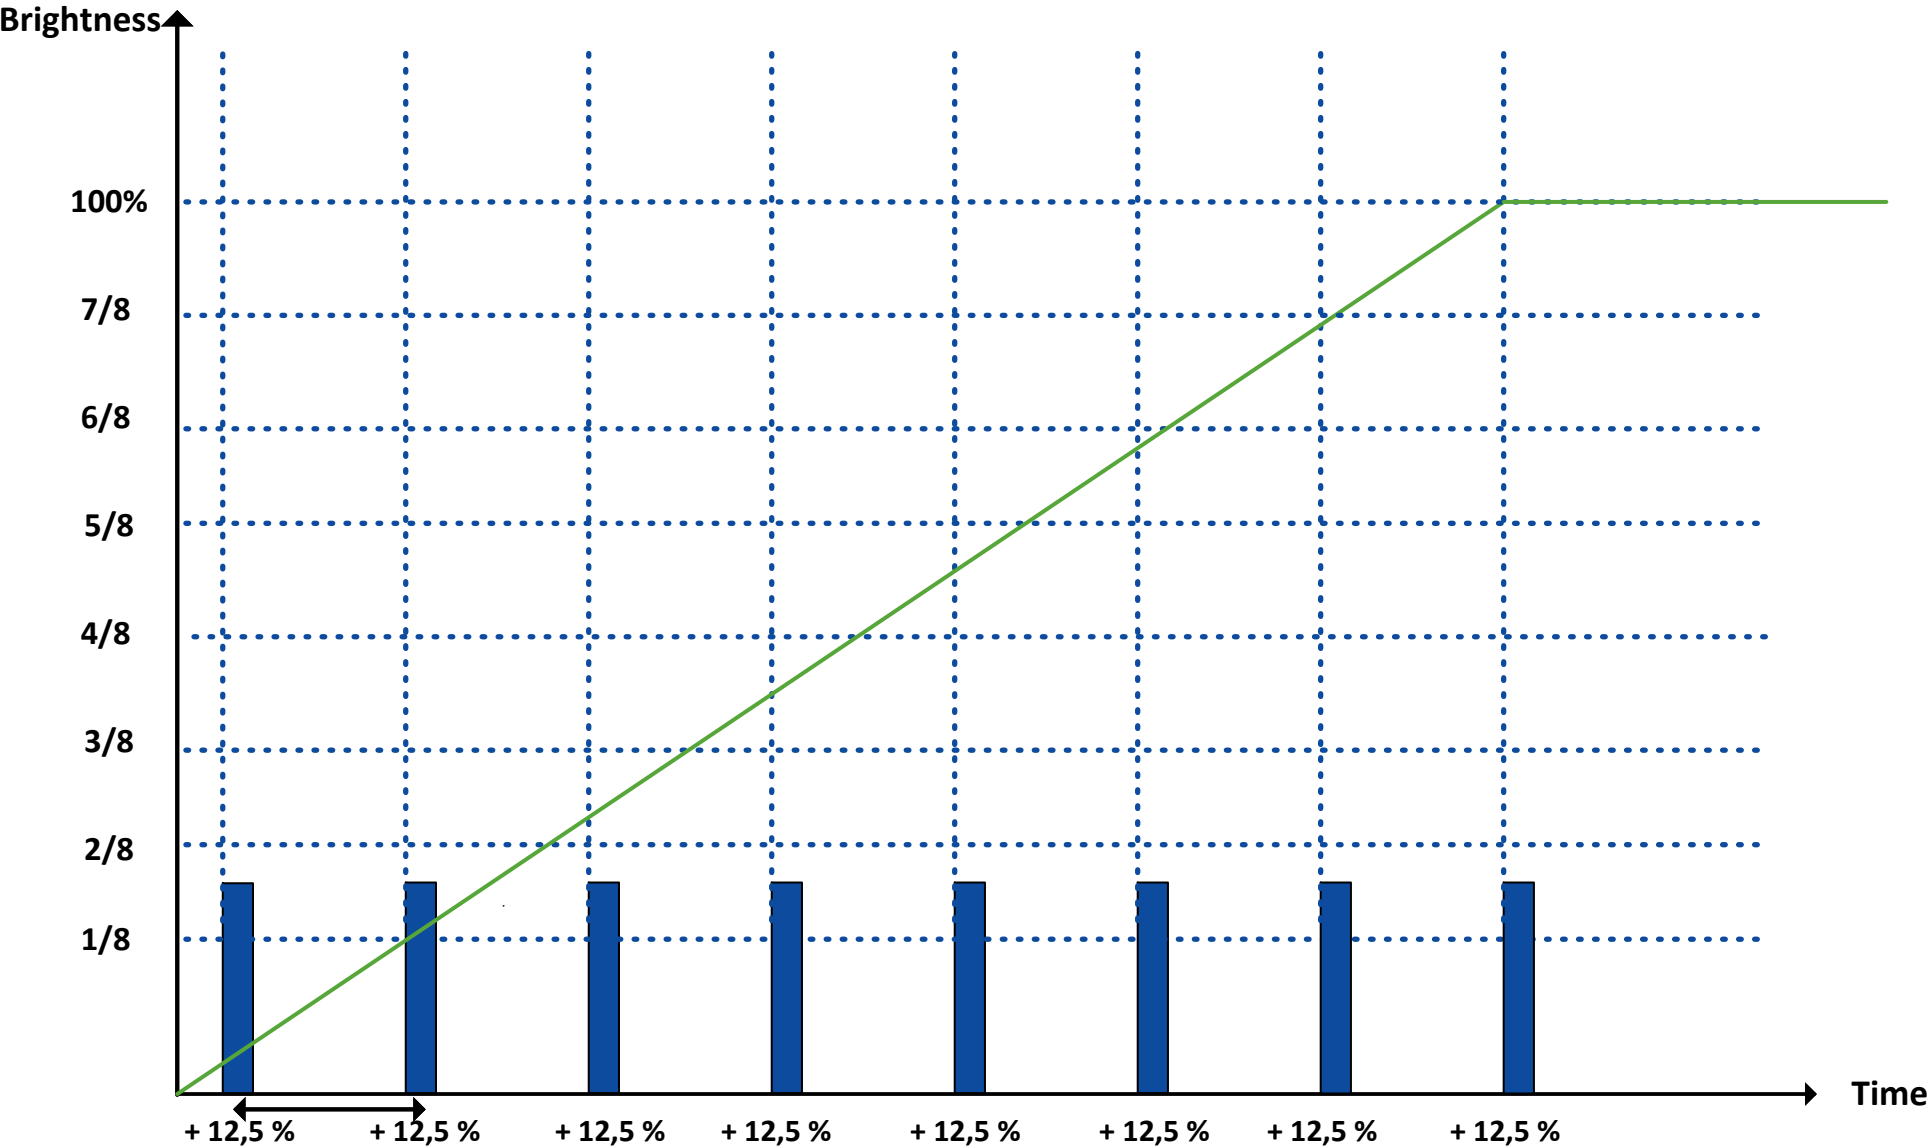

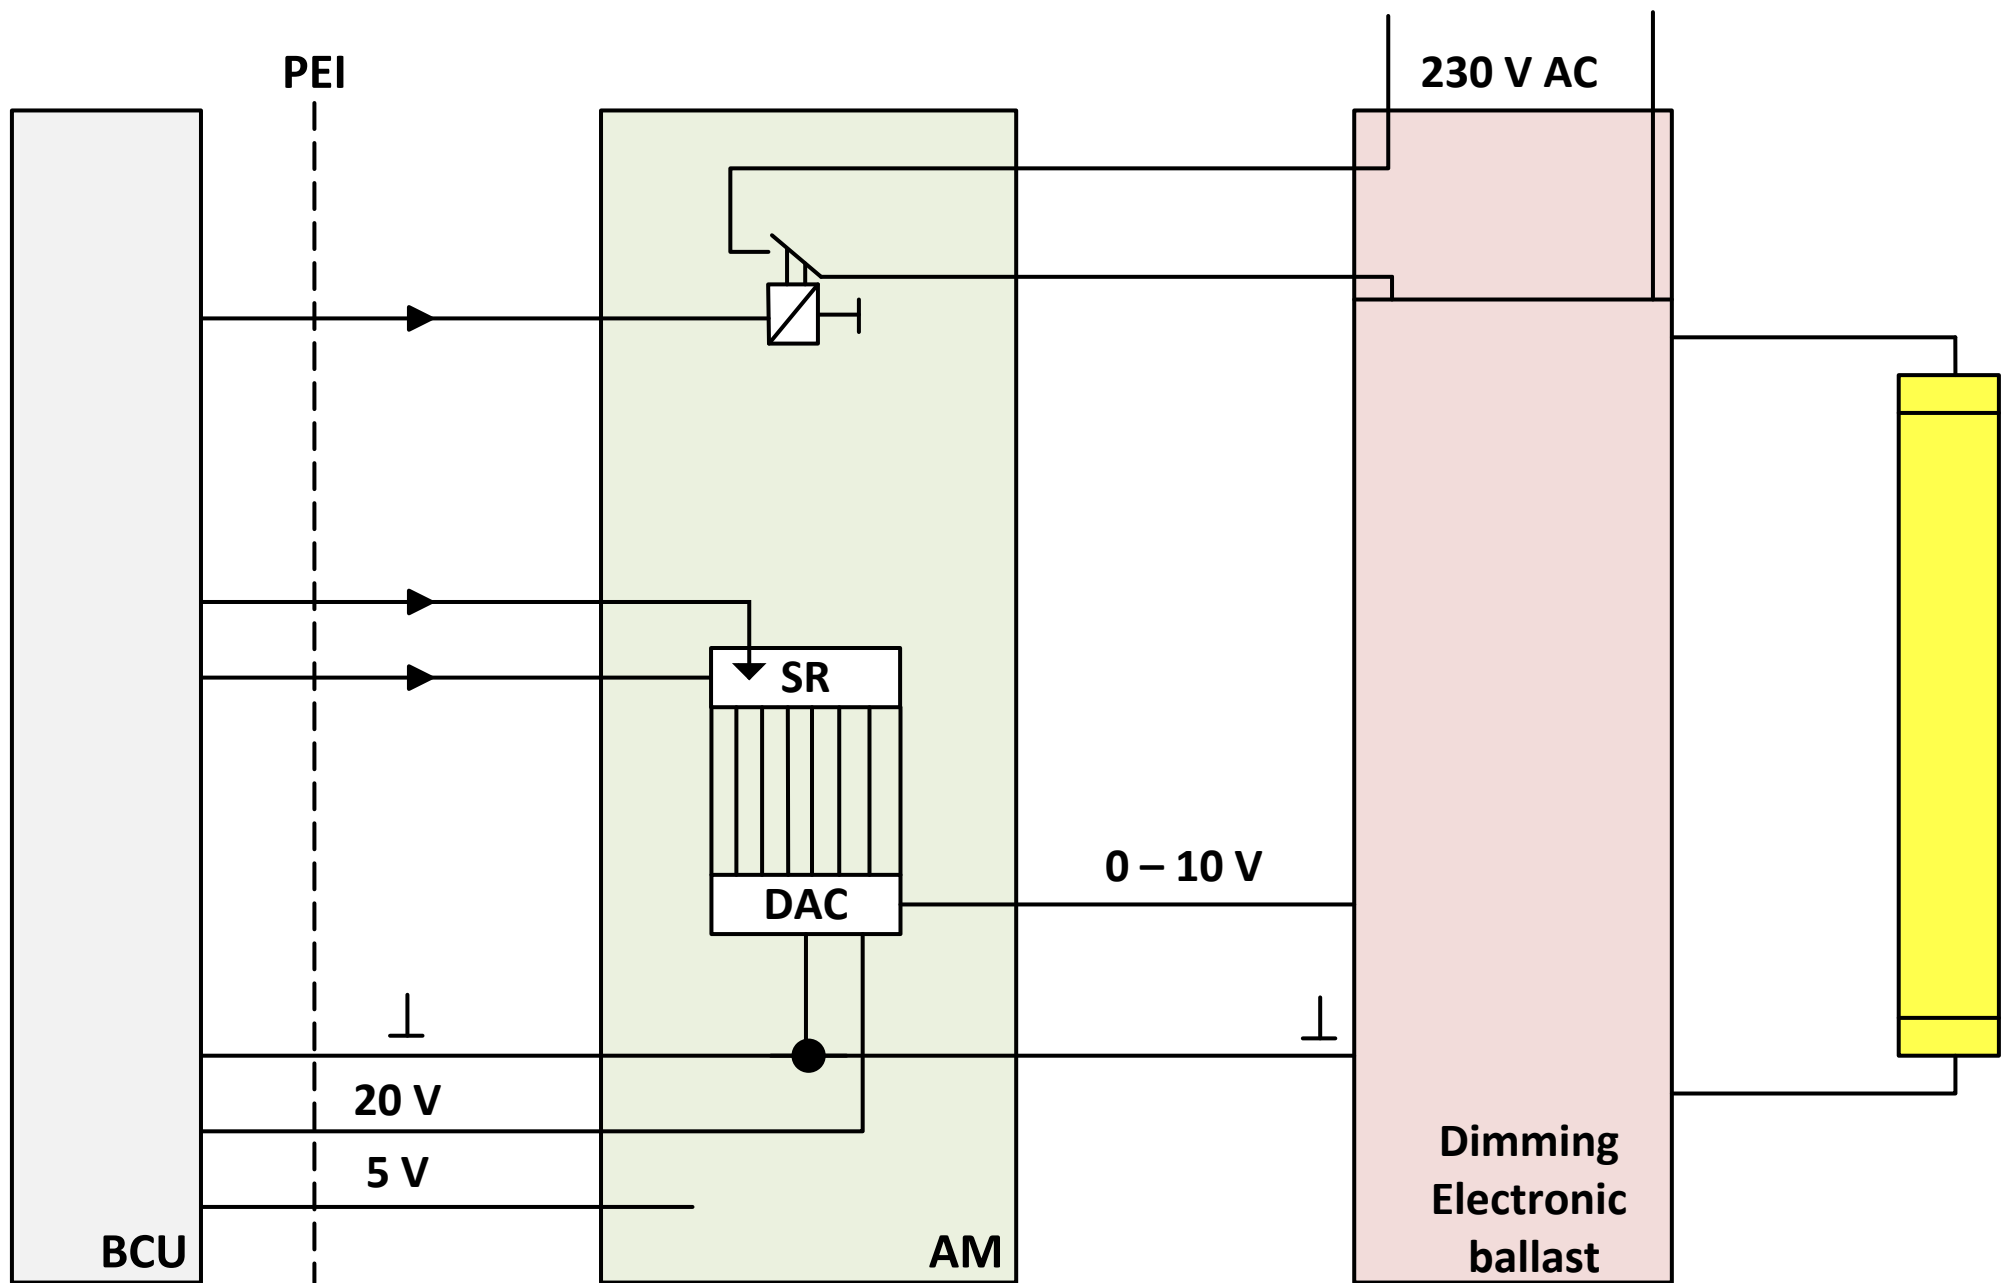

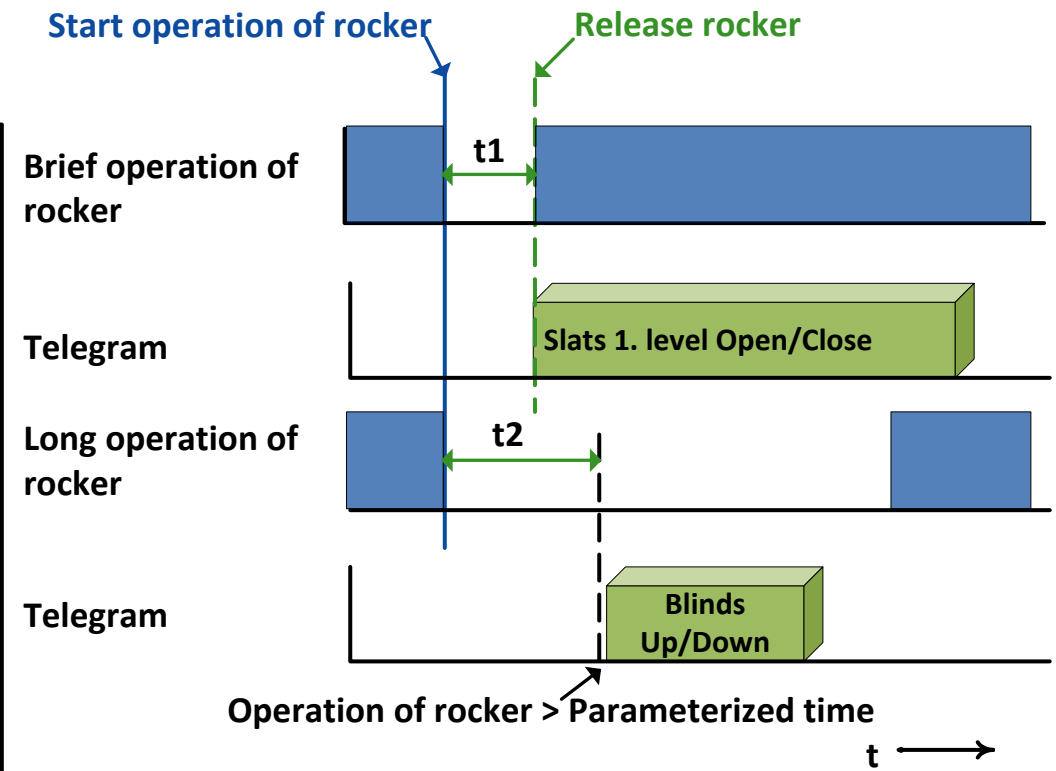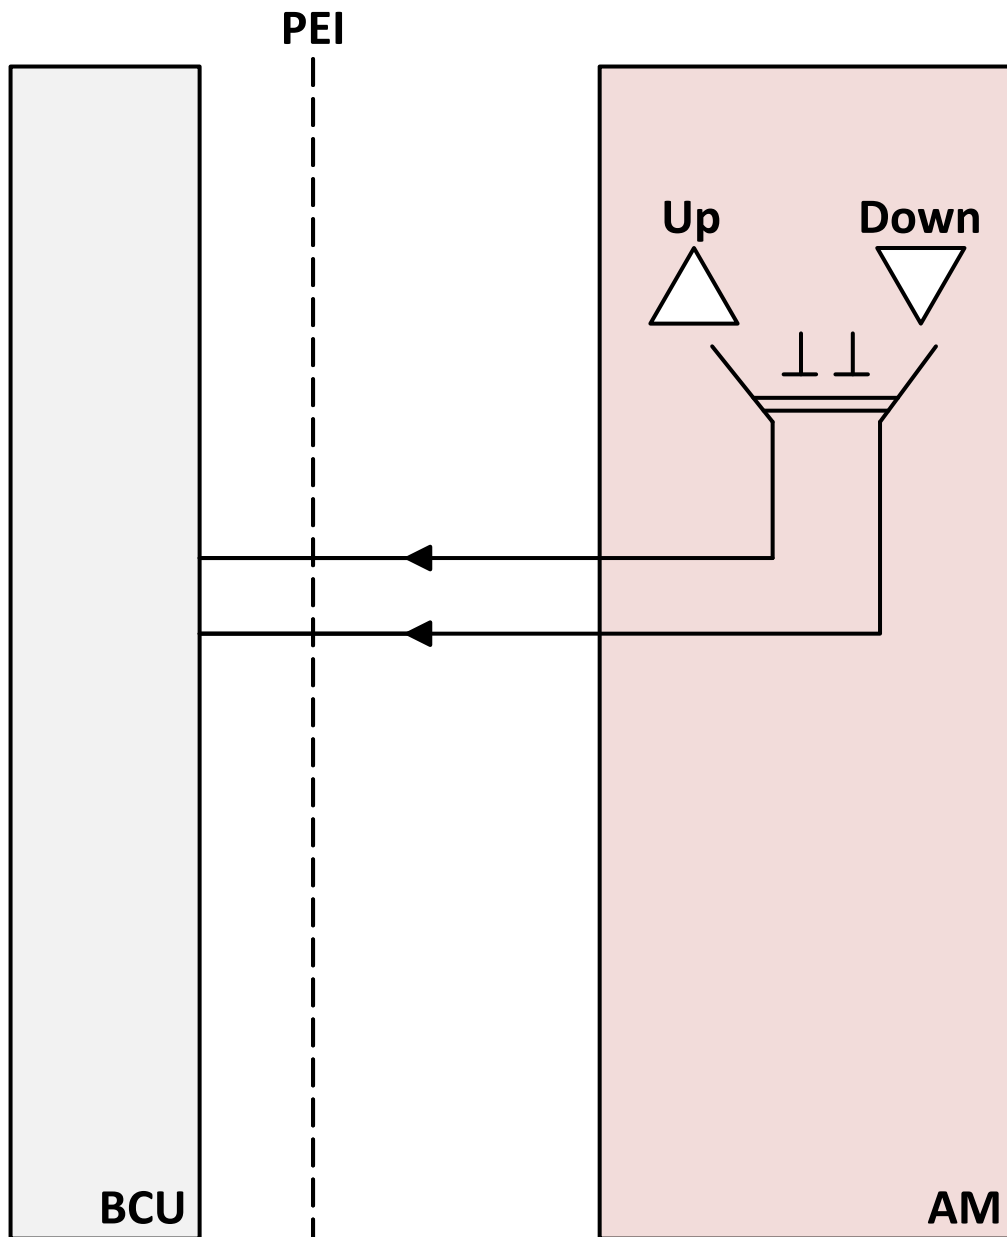

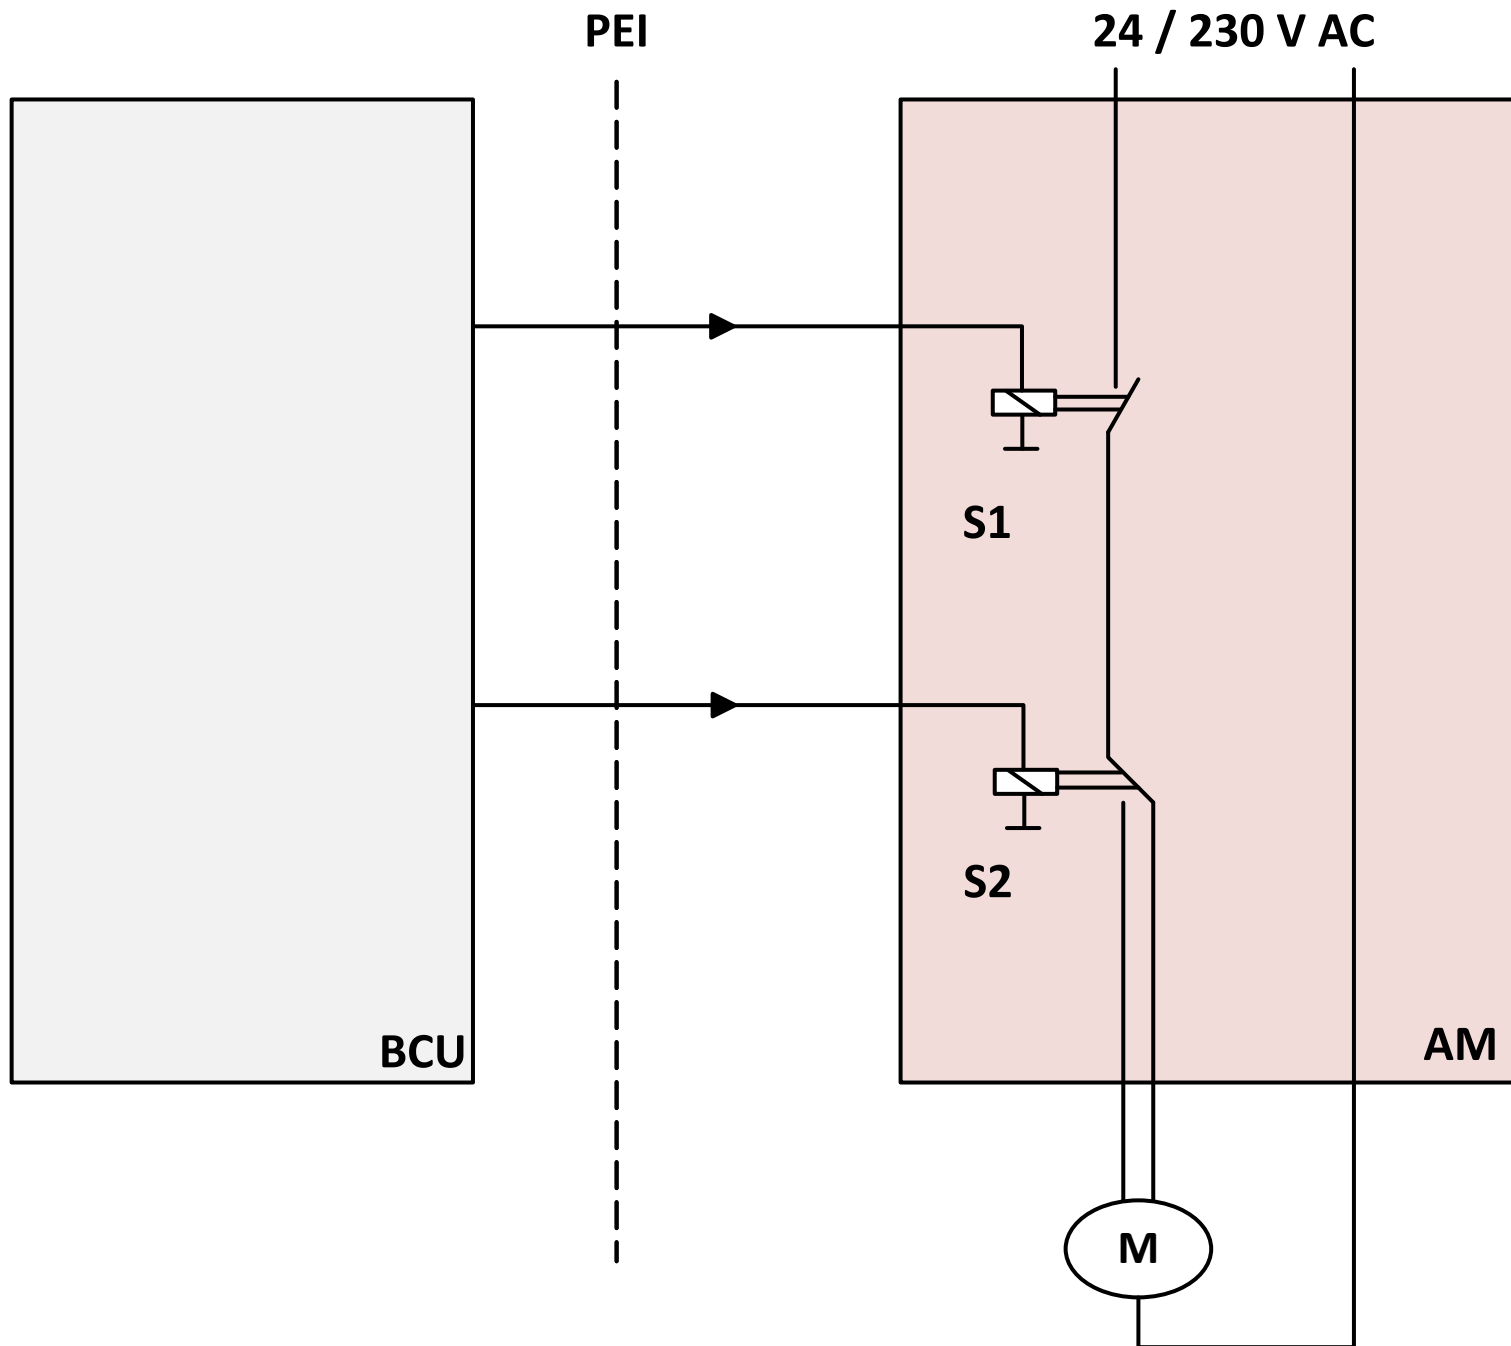

Telegram from:

Automatic Group 2/1/31
Push button Group 2/1/12, 2/1/13
Wind sensor Group 2/1/99

