



The 16 A AC1 Switch Actuators are modular installation devices in proM design for installation in the distribution board on 35 mm mounting rails. The connection to the ABB i-bus® EIB / KNX is implemented via Bus Connection Terminals.

The device does not require an additional power supply.

The actuators switch up to 8 independent electrical loads via potential free contacts.

The outputs are connected using screw terminals with combination drive head screws. Each output is controlled separately via the EIB / KNX.

The switch actuators can be manually operated via an operating element which simultaneously indicates the switch status.

The actuators are particularly suitable for switching ohmic loads.

Technical data

Power supply	- Operating voltage - Current consumption EIB / KNX - Power consumption EIB / KNX	21...30 V DC, made available by the bus < 12 mA Max. 250 mW			
Output nominal values	- SA/S - type - Number of contacts (potential free) - U_n rated voltage - I_n rated current - Power loss per device at max. load	2.16.1	4.16.1	8.16.1	12.16.1
		2	4	8	12
		250 / 440 V AC (50/60 Hz)			
		16 A	16 A	16 A	16 A
		2.0 W	4.0 W	8.0 W	10 W
Output switching currents	- AC1 operation (cosφ = 0.8) EN 60 947-4-1 - Fluorescent lighting load AX to EN 60669-1 - Minimum switching performance - DC current switching capacity (ohmic load)	16 A / 230 V 16 A / 250 V (70 μF) ²⁾ 100 mA / 12 V 100 mA / 24 V 16 A / 24 V DC			
Output life expectancy	- Mechanical endurance - Electrical endurance to IEC 60 947-4-1 - AC1 (240 V/cosφ = 0.8)	> 3 x 10 ⁵		Operations (state change)	
		> 10 ⁵			
Output switching times ¹⁾	- Max. number of relay position changes per output and minute, if all relays are switched simultaneously. The position changes should be distributed equally within the minute. - Max. number of relay position changes per output, and minute if only one relay is switched	2.16.1	4.16.1	8.16.1	12.16.1
		60	30	15	10
		120	120	120	120
Connections	- EIB / KNX - Load current circuits - cable shoe - Tightening torque	Bus Connection Terminal, 0.8 mm Ø, single core Screw terminal with universal head (PZ 1) 0.2...4 mm ² finely stranded, 2x (0.2 – 2.5 mm ²) 0.2...6 mm ² single core, 2x (0.2 – 4 mm ²) contact pin minimum 10 mm Max. 0.8 Nm			
Operating and display elements	- Red LED and EIB / KNX push button - Contact position indication	for assignment of the physical address Relay lever			
Housing	IP 20	to EN 60 529			
Safety class	II	to EN 61 140			
Isolation category	- Overvoltage category - Pollution degree	III to EN 60 664-1 2 to EN 60 664-1			

¹⁾ The specifications apply only after the bus voltage has been applied to the device for at least 30 seconds. The typical elementary delay of the relay is approx. 20 ms.

²⁾ The maximum inrush-current peak (see table 2) may not be exceeded.

Table 1 – Part 1: 16 A Switch Actuator SA/S x.16.1, technical data

EIB / KNX voltage	– SELV 24 V DC (safety extra low voltage)				
Temperature range	– Operation	– 5 °C ... + 45 °C			
	– Storage	– 25 °C ... + 55 °C			
	– Transport	– 25 °C ... + 70 °C			
Environment conditions	– humidity	max. 93 %, without bedewing			
Design	– Modular DIN-Rail Component (MDRC)	Modular installation device, ProM			
	– SA/S - type	2.16.1	4.16.1	8.16.1	12.16.1
	– Dimensions (H x W x D)	90 x W x 64			
	– Width W in mm	36	72	144	216
	– Mounting width (modules at 18 mm)	2	4	8	12
	– Mounting depth in mm	64	64	64	64
Weight	– In kg	0.15	0.25	0.46	0.65
Installation	– On 35 mm mounting rail	EN 60 715			
Mounting position	– As required				
Housing, colour	– Plastic housing, grey				
Approvals	– EIB / KNX nach EN 50 090-2-2	Certification			
CE mark	– In accordance with the EMC guideline and low voltage guideline				

Table 1 – Part 2: 16 A Switch Actuator SA/S x.16.1, technical data

Lamp loads

Lamps	– Incandescent lamp load	2330 W
Fluorescent lamp T5 / T8	– Uncompensated luminaire	2300 W
	– Parallel compensated	1500 W
	– DUO circuit	1500 W
Low-volt halogen lamps	– Inductive transformer	1200 W
	– Electronic transformer	1500 W
	– Halogen lamp 230 V	2300 W
Dulux lamp	– Uncompensated luminaire	1100 W
	– Parallel compensated	1100 W
Mercury-vapour lamp	– Uncompensated luminaire	2000 W
	– Parallel compensated	2000 W
Switching performance (switching contact)	– Max. peak inrush-current I_p (150 µs)	400 A
	– Max. peak inrush-current I_p (250 µs)	320 A
	– Max. peak inrush-current I_p (600 µs)	200 A
Number of electronic ballasts (T5/T8, single element) ¹⁾	– 18 W (ABB EVG 1x58 CF)	23
	– 24 W (ABB EVG-T5 1x24 CY)	23
	– 36 W (ABB EVG 1x36 CF)	14
	– 58 W (ABB EVG 1x58 CF)	11
	– 80 W (Helvar EL 1x80 SC)	10

¹⁾ For multiple element lamps or other types the number of electronic ballasts must be determined using the peak inrush current of the electronic ballasts.

Table 2: Lamp load for SA/S x.16.1

Application programs


Type	Name	Max. number of communication objects	Max. number of group addresses	Max. number of associations
SA/S 2.16.1	Switch 2f 16A/2	34	254	254
SA/S 4.16.1	Switch 4f 16A/2	64	254	254
SA/S 8.16.1	Switch 8f 16A/2	124	254	254
SA/S 12.16.1	Switch 12f 16A/2	184	254	254

Table 3: Application programs SA/S x.16.1

Note: The programming requires the EIB Software Tool ETS2 V1.3 or higher. If the ETS3 is used a “.VD3” type file must be imported. The application program is located within the ETS2 / ETS3 in the category ABB/output/Binary output, x-fold/switch, xf16/1 (x = 2, 4 or 8, number of outputs).

Detailed information about the application can be found in the product manual for the “Switch Actuators SA/S”. This manual can be free downloaded under www.abb.de/eib.

Wiring diagram

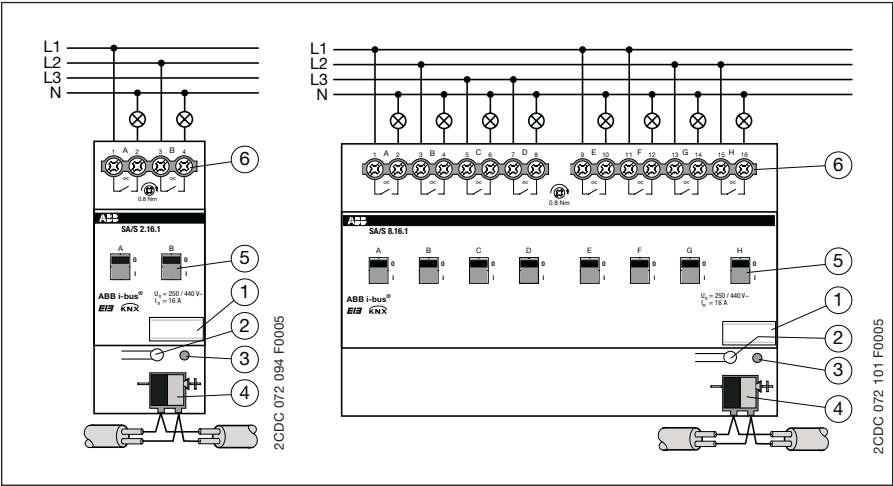

- 1 Label carrier

2 Programming button


3 Programming LED

4 Bus Connection Terminal
- 5 Contact position indication and manual operation

6 Load current circuits, per circuit 2 connection terminals

Note: All-pole disconnection must be observed in order to avoid dangerous contact voltage which can develop via loads in other phases.

Dimension drawings

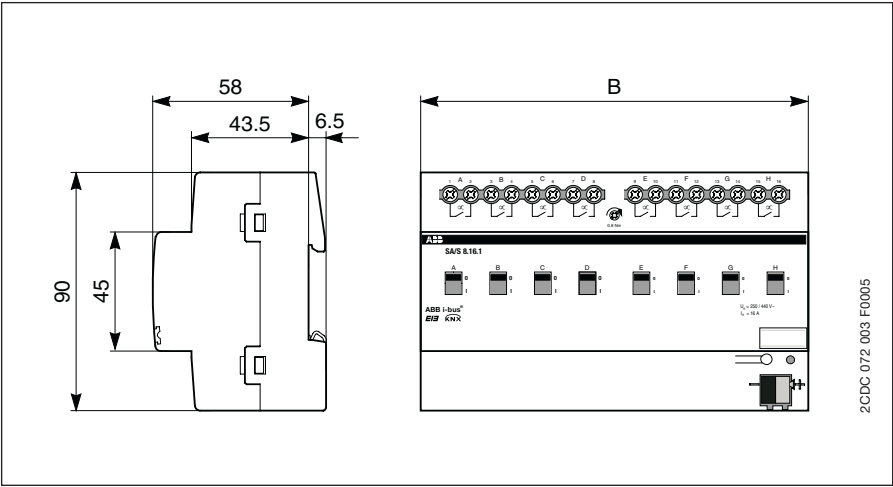

	SA/S 2.16.1	SA/S 4.16.1	SA/S 8.16.1
B	36 mm 2 module widths	72 mm 4 module widths	144 mm 8 module widths

ABB i-bus® EIB / KNX

Switch Actuator, x-fold, 16 A, MDRC
SA/S x.16.1, 2CDG 110 0xx R0011
