

KNX Controller 8 Channel Temperature for PT1000, SK08-T8

The KNX Controller 8 Channel Temperature SK08-T8 is from the S8 series and used for measuring and controlling 8 separate temperatures which are recorded by an external PT1000 temperature sensor (accessory included). There are 8 inputs for the PT1000 temperature sensor and an integrated KNX bus coupler which does not need additional auxiliary supply. The transducer with the bus coupler is enclosed in a durable, sealed, glass ball-reinforced plastic casing which fulfills protection degree IP65.

Several temperature sensors can be used and Arcus-EDS provides a multitude of accessories such as sleeve/screw-in/ceiling/ and feed sensors for many diverse applications.

In the application software a separate controller (2-position or PI controller with continuous or pulsed output) is available for every channel. Other functions include maximum and minimum thresholds and a help key where the set point and thresholds can be switched.

The sensor is configured with ETS (KNX Tool Software) and the application program. Controlling functions such as signal threshold and diverse adjustments are set using ETS (KNX Tool Software).

Article Nr.: 30801000



SK08-T8
8-Channel Temperature
Controller/Sensor
(PT1000 as accessory)

Application:

- General surveillance and controlling of temperatures

Areas of Application:

- Surveillance and controlling of temperatures for heating and cooling and temperature logging.

Applicable Sensor:
PT1000

Measuring Range: -50,00 ... 199,99 °C

Resolution: 0,01 °C

Accuracy +/- 0,3 °C (+ Accuracy of Sensor)


Use:

Electronic Measuring Equipment on flat surfaces.

Ambient Temperature Transducer: -20 ... +80°C

Ambient Temperature Electrodes according to manufacturer's specifications

Protection System Casing Transducer: IP65

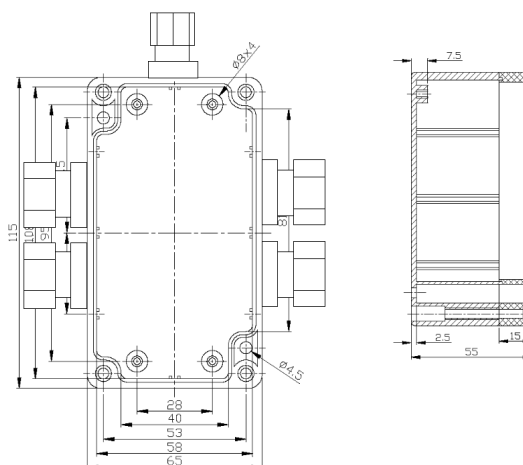


Technical Data		SK08-T8
Measured Data:		Temperature
Sending Options		no sending, cyclical sending when change occurs
Parameters		Cyclical sending with variable periods, sending when change occurs with hysteresis.
Function T1 .. T8		2-byte float, 4-byte float, 1-byte signed integer, 2-byte signed integer
Controller Modi :		Two position controller static, two position controller pulsed, PI controller pulsed
Parameter Two-Position Controller Static		Set point, differential gap, controller mode
Parameter Two-Position Controller Pulsed		Set point, differential gap, controller mode , cycle duration, duty cycle
Parameter PI Controller Continuous		Set point, reset time, proportional factor, controller mode
Parameter PI Controller PWM		Set point, reset time, proportional factor, controller, cycle duration, threshold pitch
Lock Function:		For T1 ... T8 , parameter driven as release or lock
Controller Variables Output:		Switching output (1/0), 1 Bit
		Switching output pulsed, parameter driven duty cycle and cycle duration, 1 Bit
		Switching output pulsed, parameter driven cycle duration, duty cycle variable driven (PWM) with threshold pitch, 1 Bit
		Control variable continuous, 1 Byte
Control Variable Periodic Sending		None or 10-250 seconds parameter driven
Threshold T1 .. T8:		Upper threshold, lower threshold
Auxiliary Quantities:		Set point, lower threshold and upper threshold
Bus power failure		Saving changed auxiliary quantities parameter driven
Calibration:		None
Ambient Temperature Electronic Measuring Equipment Casing:		Storage -20...+100°C, Operation -20...+80°C (transducer)
Ambient Temperature Humidity:		0...95% rH not condensating
Accuracy:		+/- 0,3 °C
Resolution:		+/- 0,01 °C
Operating Voltage:		EIB/KNX bus voltage 21-32V DC
Power Consumption ca.:		240 mW (at 24V DC)
Auxiliary Supply:		Not required
Bus Coupler:		integrated
Start-up with ETS:		ARC_S8.VD2 Product: SK08-T8
Circuit Points:		EIB-2-pole clamps (red/black)
Protection Class:		IP65
Assembly Type Transducer:		Assembly with 2 screws finery
Casing Transducer:		Plastic grey
Casing Dimensions:		115 mm x 64mm x 56 mm (L x W x H)
Article Number:		30801000
Sensors:		PT1000 any type
Non-used Inputs:		Short-circuiting with short-circuiting switch in device

Order:			
SK08-T8		KNX Controller 8 Channel Temperature	
SK08-T8		Measuring amplifiers/ADC with bus coupler (please order PT1000 temperature sensors separately)	30801000

Start-up:

The KNX Sensor is set up using the ETS (KNX Tool Software) and the applicable application program. The sensor is delivered unprogrammed. All functions are programmed and parameterized with ETS. Please read the ETS instructions.

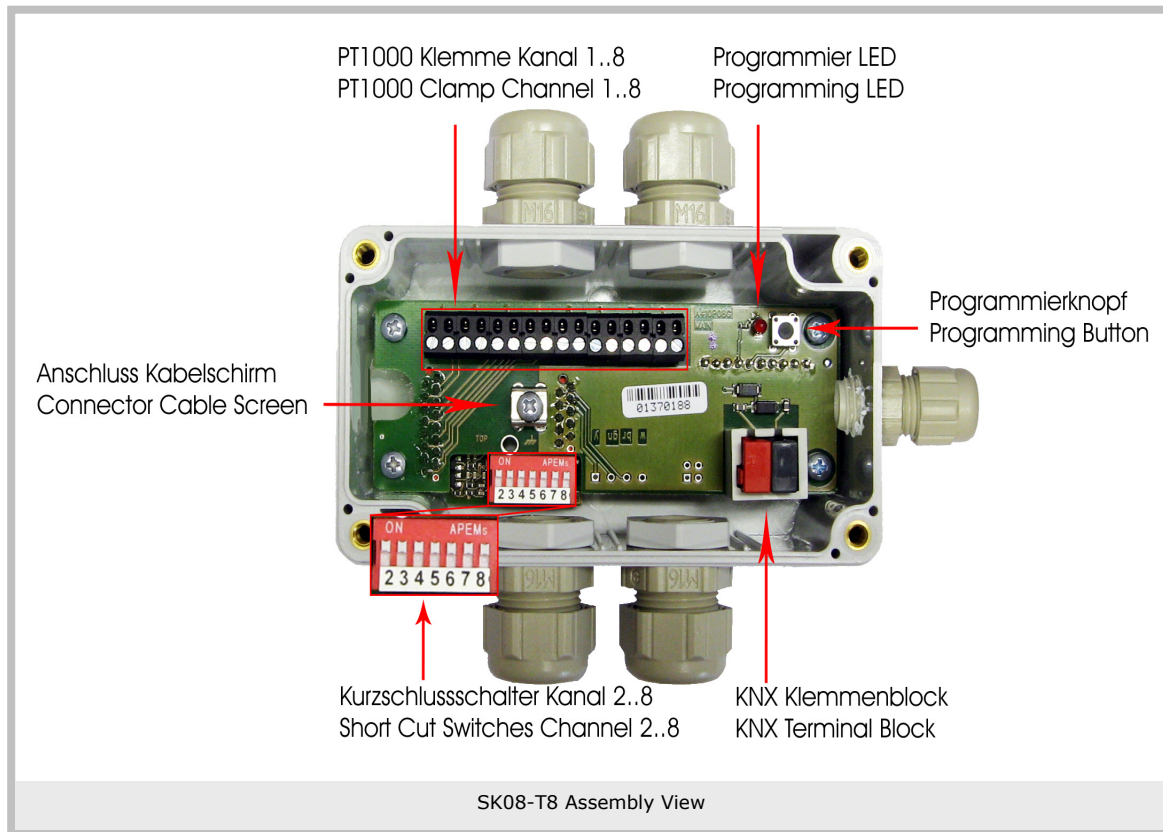

The temperature sensors on the SK08-T8 are connected in series. Therefore, any input which is not used has to be switched "short-circuited" by the DIP switch. The channel is shorted and thus deactivated when the corresponding DIP switch is "ON" or "1". The 1st Channel is always active and must therefore be connected to a sensor.

Chanel	Number	Deactivated with	Error code in case of interruption (Object 1) and shortcut (object 0)
1. Channel	Nr. 1	Always active	0x01
2. Channel	Nr. 2	switch 2	0x02
3. Channel	Nr. 3	switch 3	0x04
4. Channel	Nr. 4	switch 4	0x08
5. Channel	Nr. 5	switch 5	0x10
6. Channel	Nr. 6	switch 6	0x20
7. Channel	Nr. 7	switch 7	0x40
8. Channel	Nr. 8	switch 8	0x80

During start-up, should always be the "error code break" (read object 1). Only if the error code is 0, the device can properly record the temperatures. The error codes of the various channels are added. For example, 0xA2 as an error code that the 2nd, 6th and the 8th have a channel interruption. It can happens, that a new interrupt is displayed, after the removal of a further one, which was previously not displayed. This is caused by the measuring principle witch is used. In any case, all interrupts have to be eliminated, until the error code is 0x00.

Example: There are 5 sensors used on channels 1 to 5 The switch 2 to 5 must "OFF" or "0", the switch to 6, 7 and 8 "ON" or "1". The short-circuit fault code is now "0xE0" or 224, the error interruption code must be 0x00.

Assembly:

The Sensor SK08-T8 is for outdoor and (moist) indoor areas. It fulfills protection class IP65. The sensor is attached to the wall with two screws.

The transducer lid is opened by loosening the screws.

In cases where radiations can distort the readings, shielded cables must be used. For the shielding is present on the PCB a connection option.

First attach the sensor to the wall or ceiling, then insert the KNX Bus cable into the slot on the side of the casing (PG Connection). Detach the bus clamp from the device, attach the cable and replace the clamp onto the board. After successfully programming the device, screw the cover back on.

→ Be careful not to damage the electronics with tools and cable heads.

In Case of Bus Voltage Recurrence:

All changes made using the help key for the KNX/EIB bus are saved if the device has been correctly parameterized. The controller and outputs start with their current values and the ETS parameter settings are saved.

Discharge Program and Reset Sensor:

Should the sensor crash due to a programming malfunction, the previous project can be deleted by pressing the programming button. Hold the programming button down while connecting the EIB bus clamp and wait until the programming LED display appears. This will take 5 – 10 seconds. The calibration information is then lost.

Imprint:

Publisher: Arcus-EDS GmbH, Rigaer Str. 88, 10247 Berlin

Responsible for Content: Hjalmar Hevers, Reinhard Pegelow

Reprints, including partial reprints, can be made only with expressed permission from Arcus-EDS GmbH. This information is the best to our knowledge and is without guarantee. We reserve the right to make any technical as well as price changes at any time.

Accountability:

The selection of devices and the determination of the suitability of the devices for a specific purpose lie fully in the hands of the said buyer. For this we give no guarantee and do not accept accountability. The data in the catalogue and data sheets do not promise special properties, but instead are derived from experience and measurements. Arcus excludes responsibility for damage done on the part of the customer due to improper operation/projecting or malfunctions. On the contrary, the operator/projector has to make sure that improper operation, and projection and malfunctions do not lead to any further damage.

Safety Guidelines:

Attention! Installing and assembling electrical devices must only be done by an electronics specialist. The customer should be aware of and adhere to the safety guidelines of VDE, TÜV and the appropriate energy provider. Our guarantee does not include defects and damage caused by improper use or non-compliance of operating instructions.

Warranty:

We provide a warranty as required by law. Please contact us in case of malfunction and send the device with a full description of the fault to the address below.

Manufacturer:**Incorporated Trademarks:**

 The CE Trademark is an unofficial market trademark used exclusively by authorities and provides no warranty of properties.



Incorporated trademark of Konnex Association