

TECHNICAL DATA

ABB i-bus® KNX

SA/S 12.16.5.2

Switch Actuator



Product description

The Switch Actuator is a modular installation device in *proM* design. The device is designed for installation in electrical distribution boards and small housings for rapid mounting on a 35-mm mounting rail (to EN 60715).


The device possesses mutually independent switching relays with which the following functions can be implemented:

- Switching electric consumers (alternating or three-phase current)


The device is provided with bus voltage via the bus (ABB i-bus® KNX). The connection to the bus (ABB i-bus® KNX) is implemented using the bus connection terminal. The consumers are connected at the outputs using screw terminals (terminal designation on the housing).

The outputs can be switched manually using toggle switches.

Dimension drawing

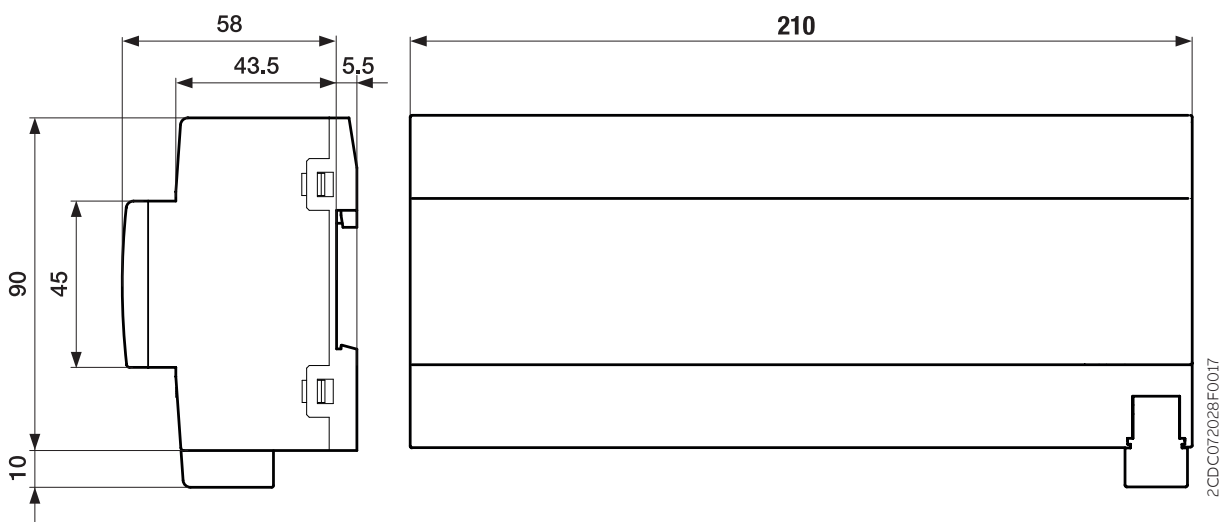

Connection diagram

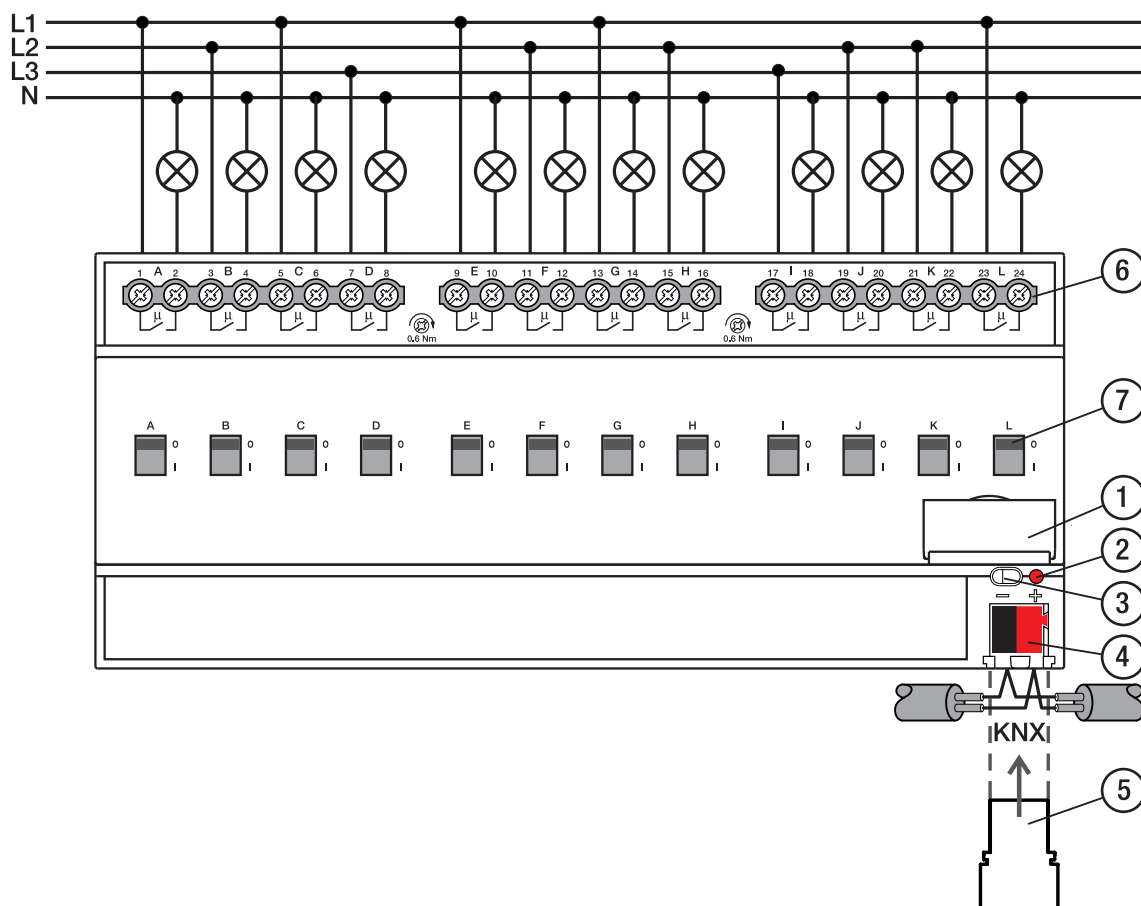

Legend

- | | |
|---------------------------|--|
| 1 Label carriers | 5 Cover cap |
| 2 Programming LED | 6 Load circuit, two screw terminals each |
| 3 Programming button | 7 Contact position indication and ON/OFF actuation |
| 4 Bus connection terminal | |

General technical data

Supply	Bus voltage	21 ... 32 V DC
	Current consumption, bus	< 12 mA
	Power loss, bus	Max. 250 mW
	Power loss (16 A), device	12.0 W
	Power loss (20 A), device	16.0 W
Connections	KNX	Ø 0.8 mm single core (via bus connection terminal)
Connection terminals	Screw terminal	Screw terminal with universal head (PZ 1)
		0.2 ... 4 mm ² stranded, 2 × (0.2 ... 2.5 mm ²)
		0.2 ... 6 mm ² single core, 2 × (0.2 ... 4 mm ²)
	Ferrule without plastic sleeve	0.25 ... 2.5 mm ²
	Ferrule with plastic sleeve	0.25 ... 4 mm ²
	TWIN ferrules	0.5 ... 2.5 mm ²
	Ferrule contact pin length	Min. 10 mm
	Tightening torque	Max. 0.6 Nm
Degree of protection and protection class	Degree of protection	IP 20 to EN 60529
	Protection class	II to EN 61140
Isolation category	Overvoltage category	III to EN 60664-1
	Pollution degree	II to EN 60664-1
	Fire classification	Flammability V-0 as per UL94
SELV	KNX safety extra low voltage	SELV 24 V DC
Temperature range	Operation	-5 ... +45 °C
	Transport	-25 ... +70 °C
	Storage	-25 ... +55 °C
Ambient conditions	Maximum air humidity	95 %, no condensation allowed
Design	Modular installation device (MDRC)	Modular installation device
	Design	proM
	Housing/color	Plastic, gray
Dimensions	Dimensions	90 x 210 x 63.5 mm (H x W x D)
	Mounting width in space units	12 modules
	Mounting depth	63.5 mm
Mounting	35 mm mounting rail	To EN 60715
	Mounting position	Any
	Weight (net)	0.676 kg
Approvals	KNX certification	To EN 50090-1, -2
	CE marking	In accordance with the EMC and Low Voltage Directives

Device type

Device type	Switch Actuator	SA/S 12.16.5.2
	Application	Switch C load 12f 16 A / ...
		... = current version number of the application
	Maximum number of group objects	286
	Maximum number of group addresses	1,000
	Maximum number of assignments	1,000

Note

Observe software information on the website → www.abb.com/knx.

Note

The device supports the locking function of a KNX device in ETS. If a BCU code was assigned, the device can be read and programmed only with this BCU code.

Output, rated current 16 A - 20 A C load

Rated values	Number of outputs	12
	U_n rated voltage	230 V AC (50/60 Hz)
	I_n rated current (per output pair)	16 A / 20 A
	Maximum current per device	12 x 20 A
Switching currents	AC3 operation ($\cos \phi = 0.45$) to EN 60947-4-1	16 A / 230 V AC
	AC1 operation ($\cos \phi = 0.8$) to EN 60947-4-1	20 A / 230 V AC
	Fluorescent lighting load according to EN 60669-1	20 A (200 μ F) C-Load
	Minimum switching current at 12 V AC	100 mA
	Minimum switching current at 24 V AC	100 mA
	DC switching capacity, resistive load, at 24 V DC	20 A
Service life	Mechanical service life	> 3 x 10 ⁶ cycles
	Electrical service life of switching contacts to IEC 60947-4-1:	
	AC1 (240 V/ $\cos \phi = 0.8$)	> 10 ⁵ cycles
	AC3 (240 V/ $\cos \phi = 0.45$)	> 3 x 10 ⁴ cycles
	AC5a (240 V/ $\cos \phi = 0.45$)	> 3 x 10 ⁴ cycles
Switching times	Maximum output relay position changes per minute if all relays are switched.	5
	Maximum output relay position changes per minute if only one relay is switched.	60

Output, lamp load 16 A - 20 A C load

Lamps	Incandescent lamp load	3,680 W
Fluorescent lamps	Uncompensated	3,680 W
	Parallel compensated	2,500 W
	DUO circuit	3,680 W
Low-voltage halogen lamps	Inductive transformer	2,000 W
	Electronic transformer	2,500 W
	Halogen 230 V	3,680 W
Dulux lamp	Uncompensated	3,680 W
	Parallel compensated	3,000 W
Mercury-vapor lamp	Uncompensated	3,680 W
	Parallel compensated	3,000 W
Switching capacity (switching contact)	Maximum peak inrush current I_p (150 μ s)	600 A
	Maximum peak inrush current I_p (250 μ s)	480 A
	Maximum peak inrush current I_p (600 μ s)	300 A
Number of ballasts (T5/T8, single element)	18 W (ABB ballast 1 x 18 SF)	26
	24 W (ABB ballast T5 1 x 24 CY)	26
	36 W (ABB ballast 1 x 36 CF)	22
	58 W (ABB ballast 1 x 58 CF)	12
	80 W (Helvar EL 1 x 80 SC)	12
Energy-saving lamps	LED lamps	650 W
Rated motor power		3,680 W

Note

The peak inrush current I_p is the typical ballast load current that results during switching. Using the peak inrush current I_p , it is possible to calculate the maximum number of switchable ballasts at the Switch Actuator output for the various ballast types. The number of ballasts specified in the table can be only a sample guide value.

—
Ordering details

Description	MB	Type	Order no.	Packaging unit [pcs.]	Weight (incl. packaging) [kg]
Switch	12	SA/S 12.16.5.2	2CDG 110 268 R0011	1	0.786

