

KNX AQS-B-UP

Air Quality Sensor

Article numbers 70229 (white), 70230 (aluminium), 70231 (anthracite), 70232 (stainless steel)



1. Description	3
1.0.1. Scope of delivery	3
1.1. Technical specifications	4
1.1.1. Accuracy of the measurement	4
2. Installation and commissioning	5
2.1. Installation notes	5
2.2. Installation position	5
2.3. Composition	6
2.3.1. Housing	6
2.3.2. Rear view of sensor board with connections	7
2.4. Assembly of the sensor	7
2.5. Notes on mounting and commissioning	7
3. Transfer protocol	9
3.1. List of all communications objects	9
4. Parameter setting	14
4.1. Behaviour on power failure/ restoration of power	14
4.2. General settings	14
4.3. CO2 measured value	15
4.4. CO2 threshold values	15
4.4.1. Threshold value 1, 2, 3, 4: CO2	16
Threshold value	16
Switching output	16
Block	17
4.5. CO2 PI control	18
General control	18
Controller target value	19
Ventilation control	19
4.6. Variable comparator	20
4.6.1. Control variable comparator 1/2	20
4.7. Logic	21
AND logic	21
OR logic	21
4.7.1. AND and/or OR logic 1/2/3/4/5/6/7/8	22
Block	22
4.7.2. AND logic connection inputs	23
4.7.3. Connection inputs of the OR logic	24
4.8. Display settings	25
4.9. Pushbutton interface 1/2	25
4.9.1. Control modes for drive control	28



Installation, inspection, commissioning and troubleshooting of the device must only be carried out by a competent electrician.

This manual is amended periodically and will be brought into line with new software releases. The change status (software version and date) can be found in the contents footer. If you have a device with a later software version, please check **www.elsner-elektronik.de** in the menu area "Service" to find out whether a more up-to-date version of the manual is available.

Clarification of signs used in this manual



Safety advice.



Safety advice for working on electrical connections, components, etc.

DANGER!

... indicates an immediately hazardous situation which will lead to death or severe injuries if it is not avoided.

WARNING!

... indicates a potentially hazardous situation which may lead to death or severe injuries if it is not avoided.

CAUTION!

... indicates a potentially hazardous situation which may lead to trivial or minor injuries if it is not avoided.



ATTENTION! ... indicates a situation which may lead to damage to property if it is not avoided.

ETS

In the ETS tables, the parameter default settings are marked by underlining.

1. Description

The **Air Quality Sensor KNX AQS-B-UP** measures the CO₂ concentration in the room. The sensor can receive an external CO₂ value via the bus and process it with the own data to an overall value (mixed value, e. g. room average). The **KNX AQS-B-UP** offers two push buttons that can be used as free programmable bus push buttons.

The **KNX AQS-B-UP** provides four switching outputs with adjustable threshold values. The switching outputs and further communication objects can be linked by AND and OR logic gates. Additionally, an integrated actuating variable comparator can compare and output values that are received via communication objects.

An integrated PI controllers allows for control of ventilation depending on CO₂ concentration.

The integrated display shows the own values and data received from the bus (e. g. date, time). The housing is completed with a frame of the switching series installed in the building and thus merges with the interior.

Functions:

- Measurement of **CO₂ concentration** of the air
- **Mixed value** from own measured value and external value (proportions can be set in percentage)
- **Display** 1-3 rows (own values or values received from the bus)
- **2 bus push buttons**
- **PI controller for ventilation** depending on CO₂ concentration:
dehumidification/humidification (one step) or dehumidification (one or two step)
- **4 switching outputs** with adjustable threshold values (Threshold values can be set by parameter or via communication objects)
- **8 AND and 8 OR logic gates** with each 4 inputs. Every switching incident as well as 8 logic inputs (in the form of communication objects) may be used as inputs for the logic gates. The output of each gate may optionally be configured as 1 bit or 2 x 8 bits
- **2 actuating variable comparators** for output of minimum, maximum or average values. Each with 5 inputs (for values received via communication objects)

Configuration is made using the KNX software ETS. The **product file** can be downloaded from the Elsner Elektronik website on www.elsner-elektronik.de in the "Service" menu.

1.0.1. Scope of delivery

- Housing with display, buttons and sensor board
- CO₂ sensor unit
- Base plate

You will need *in addition* (not supplied):

- Socket Ø 60 mm, 42 mm deep

- Frame (for element 55 x 55 mm), suitable for the switching programme used in the building

1.1. Technical specifications

Housing	Plastic material (partly lacquered)
Colours	<ul style="list-style-type: none"> • White glossy (similar to RAL 9016 Traffic White) • Aluminium matt • Anthracite matt • Stainless steel • Special colours on request
Mounting	In-wall (in socket Ø 60 mm, 42 mm deep)
Protection category	IP 20
Dimensions	Housing approx. 55 x 55 (W x H, mm), mounting depth approx. 15 mm, base plate approx. 71 x 71 (W x H, mm)
Total weight	approx. 72 g
Ambient temperature	Operation -10...+50°C, storage -20...+60°C
Ambient air humidity	max. 95% R. H., avoid bedewing
Operating voltage	KNX bus voltage
Bus current	max. 10 mA
Data output	KNX +/- bus terminal plug
BCU type	Own micro controller
PEI type	0
Group addresses	max. 254
Allocations	max. 254
Communication objects	157
CO ₂ measurement range	0...2000 ppm
CO ₂ resolution	1 ppm
CO ₂ accuracy*	± 50 ppm ± 3% of the measured value

* Mind the notes on *Accuracy of the measurement*, page 4

The product conforms with the provisions of EU guidelines.

1.1.1. Accuracy of the measurement

Measurement variations from sources of interference (see chapter *Installation position*) must be corrected in the ETS in order to ensure the specified accuracy of the sensor (offset). To ensure a correct CO₂ measurement, the device must be installed in a windproof socket.

The indicated **accuracy of the CO₂ measurement** will be achieved after a run-in period of 24 hours (without interruption of the bus voltage) if the sensor has been in contact with fresh air (350...450 ppm) at least once in this period.

After this, the CO₂ sensor will recalibrate every two weeks by defining the lowest measured value captured during that period (without interruption of the bus voltage) as a reference for fresh air.

To guarantee the accuracy on a sustained basis, the sensor should be provided with fresh air at least once in two weeks. This occurs normally during room ventilation.

2. Installation and commissioning

2.1. Installation notes



Installation, testing, operational start-up and troubleshooting should only be performed by an electrician.



CAUTION!

Live voltage!

There are unprotected live components inside the device.

- National legal regulations are to be followed.
- Ensure that all lines to be assembled are free of voltage and take precautions against accidental switching on.
- Do not use the device if it is damaged.
- Take the device or system out of service and secure it against unintentional use; if it can be assumed, that risk-free operation is no longer guaranteed.

The device is only to be used for its intended purpose. Any improper modification or failure to follow the operating instructions voids any and all warranty and guarantee claims.

After unpacking the device, check it immediately for possible mechanical damage. If it has been damaged in transport, inform the supplier immediately.

The device may only be used as a fixed-site installation; that means only when assembled and after conclusion of all installation and operational start-up tasks and only in the surroundings designated for it.

Elsner Elektronik is not liable for any changes in norms and standards which may occur after publication of these operating instructions.

2.2. Installation position

The **Air Quality Sensor KNX AQS-B-UP** will be installed concealed within a socket (Ø 60 mm, 42 mm deep).



**May be installed and operated in dry interior rooms only.
Avoid condensation.**

For monitoring of the CO₂ content of the room air choose an installation position in height of head (standing or sitting, according to utilization of room). The CO₂ concentration in indoor rooms is highest near the floor and decreases towards the ceiling.

When selecting an installation location, please ensure that the measurement results are affected as little as possible by external influences. Possible sources of interference include:


- Drafts from windows and doors
- Draft from ducts which lead from other rooms or from the outside to the junction box in which the sensor is mounted

Measurement variations from such sources of interference must be corrected in the ETS in order to ensure the specified accuracy of the sensor (offset).

To ensure a correct CO₂ measurement, the device must be installed in a windproof socket.

2.3. Composition

2.3.1. Housing

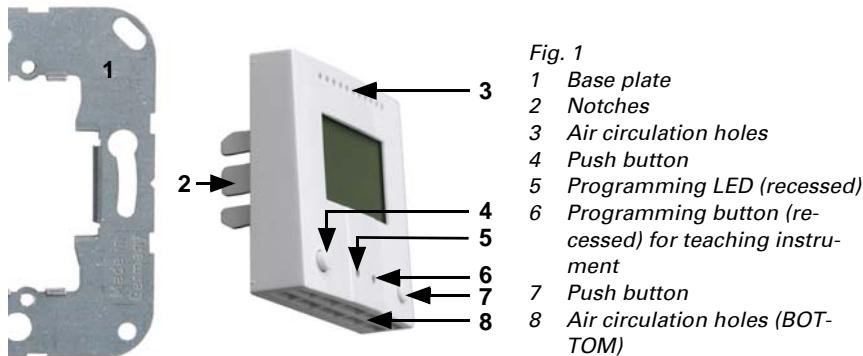

2.3.2. Rear view of sensor board with connections

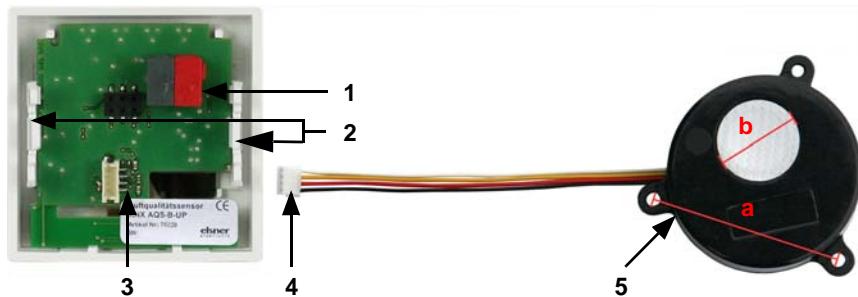


Fig. 2

- 1 KNX terminal BUS +/-
- 2 Notches
- 3 Slot for CO₂ sensor unit
- 4 Plug of CO₂ sensor unit
- 5 CO₂ sensor unit

Length of cable approx. 110 mm
 a Hole centre distance approx. 43 mm
 b Diameter of diaphragm
 approx. 18 mm

2.4. Assembly of the sensor

First of all fit the windproof socket with connection. Also seal inlet pipes to avoid infiltration.



Place the CO₂ sensor unit in the socket. The side with the sensor membrane must face to front.

Fig. 3

Screw the base plate onto the socket and position the frame of the switching programme. Connect the CO₂ sensor unit and the bus line +/- (black-red plug) to the terminals provided on the board.

Pin the sensor with the notches on to the metal frame, so that sensor and frame are fixed.

2.5. Notes on mounting and commissioning

Never expose the device to water (e.g. rain) or dust. This can damage the electronics. You must not exceed a relative humidity of 95%. Avoid condensation.

After the bus voltage has been applied, the device will enter an initialisation phase lasting a few seconds. During this phase no information can be received or sent via the bus.

3. Transfer protocol

Units:

CO_2 content in ppm

Variables in %

3.1. List of all communications objects

Abbreviation flags:

C Communication

R Read

W Write

T Transfer

U Update

No.	Name	Function	DPT	Flags
0	Software version	readable	217,001	C R T
2	CO2 sensor malfunction	Output	1,001	C R T
98	Outside CO2 reading	Input	9,008	C W
99	Inside CO2 Internal reading	Output	9,008	C R T
100	Total CO2 reading	Output	9,008	C R T
101	CO2 maximum value request	Input	1,017	C W
102	Maximum CO2 reading	Output	9,008	C R T
103	Reset CO2 maximum value	Input	1,017	C W
104	CO2 threshold value 1: Absolute value	Input/Output	9,008	C R W T U
105	CO2 threshold value 1: (1:+ 0:-)	Input	1,002	C W
106	CO2 threshold value 1: Switching delay from 0 to 1	Input	7,005	C W
107	CO2 threshold value 1: Switching delay from 1 to 0	Input	7,005	C W
108	CO2 threshold value 1: Switching output	Output	1,001	C R T
109	CO2 threshold value 1: Switching output block	Input	1,002	C W
110	CO2 threshold value 2: Absolute value	Input/Output	9,008	C R W T U
111	CO2 threshold value 2: (1:+ 0:-)	Input	1,002	C W
112	CO2 threshold value 2: Switching delay from 0 to 1	Input	7,005	C W

No.	Name	Function	DPT	Flags
113	CO2 threshold value 2: Switching delay from 1 to 0	Input	7,005	C W
114	CO2 threshold value 2: Switching output	Output	1,001	C R T
115	CO2 threshold value 2: Switching output block	Input	1,002	C W
116	CO2 threshold value 3: Absolute value	Input/Output	9,008	C R W T U
117	CO2 threshold value 3: (1:+ 0:-)	Input	1,002	C W
118	CO2 threshold value 3: Switching delay from 0 to 1	Input	7,005	C W
119	CO2 threshold value 3: Switching delay from 1 to 0	Input	7,005	C W
120	CO2 threshold value 3: Switching output	Output	1,001	C R T
121	CO2 threshold value 3: Switching output block	Input	1,002	C W
122	CO2 threshold value 4: Absolute value	Input/Output	9,008	C R W T U
123	CO2 threshold value 4: (1:+ 0:-)	Input	1,002	C W
124	CO2 threshold value 4: Switching delay from 0 to 1	Input	7,005	C W
125	CO2 threshold value 4: Switching delay from 1 to 0	Input	7,005	C W
126	CO2 threshold value 4: Switching output	Output	1,001	C R T
127	CO2 threshold value 4: Switching output block	Input	1,002	C W
128	CO2 controller: Blocking object	Input	1,002	C W
129	CO2 controller: Target value	Input/Output	9,008	C R W T
130	CO2 controller: Target value (1:+ 0:-)	Input	1,002	C W
131	CO2 controller: Control variable ventilation (stage 1)	Output	5,001	C R T
132	CO2 controller: Control variable ventilation (stage 2)	Output	5,001	C R T
133	CO2 controller: Ventilation 1 status (1=ON 0=OFF)	Output	1,001	C R T
134	CO2 controller: Ventilation 2 status (1=ON 0=OFF)	Output	1,001	C R T
135	Comparator 1 actuating variable: Input 1	Input	5,010	C W

No.	Name	Function	DPT	Flags
136	Comparator 1 actuating variable: Input 2	Input	5,010	C W
137	Comparator 1 actuating variable: Input 3	Input	5,010	C W
138	Comparator 1 actuating variable: Input 4	Input	5,010	C W
139	Comparator 1 actuating variable: Input 5	Input	5,010	C W
140	Comparator 1 actuating variable: Output	Output	1,001	C R T
141	Comparator 1 actuating variable: Block	Input	1,002	C W
142	Comparator 2 actuating variable: Input 1	Input	5,010	C W
143	Comparator 2 actuating variable: Input 2	Input	5,010	C W
144	Comparator 2 actuating variable: Input 3	Input	5,010	C W
145	Comparator 2 actuating variable: Input 4	Input	5,010	C W
146	Comparator 2 actuating variable: Input 5	Input	5,010	C W
147	Comparator 2 actuating variable: Output	Output	1,001	C R T
148	Comparator 2 actuating variable: Block	Input	1,002	C W
149	AND logic 1: 1-bit switching output	Output	1,002	C R T
150	AND logic 1: 8-bit output A	Output	5,010	C R T
151	AND logic 1: 8-bit output B	Output	5,010	C R T
152	AND logic 1: Block	Input	1,002	C W
153	AND logic 2: 1-bit switching output	Output	1,002	C R T
154	AND logic 2: 8-bit output A	Output	5,010	C R T
155	AND logic 2: 8-bit output B	Output	5,010	C R T
156	AND logic 2: Block	Input	1,002	C W
157	AND logic 3: 1-bit switching output	Output	1,002	C R T
158	AND logic 3: 8-bit output A	Output	5,010	C R T
159	AND logic 3: 8-bit output B	Output	5,010	C R T
160	AND logic 3: Block	Input	1,002	C W
161	AND logic 4: 1-bit switching output	Output	1,002	C R T
162	AND logic 4: 8-bit output A	Output	5,010	C R T
163	AND logic 4: 8-bit output B	Output	5,010	C R T
164	AND logic 4: Block	Input	1,002	C W

No.	Name	Function	DPT	Flags
165	AND logic 5: 1-bit switching output	Output	1,002	C R T
166	AND logic 5: 8-bit output A	Output	5,010	C R T
167	AND logic 5: 8-bit output B	Output	5,010	C R T
168	AND logic 5: Block	Input	1,002	C W
169	AND logic 6: 1-bit switching output	Output	1,002	C R T
170	AND logic 6: 8-bit output A	Output	5,010	C R T
171	AND logic 6: 8-bit output B	Output	5,010	C R T
172	AND logic 6: Block	Input	1,002	C W
173	AND logic 7: 1-bit switching output	Output	1,002	C R T
174	AND logic 7: 8-bit output A	Output	5,010	C R T
175	AND logic 7: 8-bit output B	Output	5,010	C R T
176	AND logic 7: Block	Input	1,002	C W
177	AND logic 8: 1-bit switching output	Output	1,002	C R T
178	AND logic 8: 8-bit output A	Output	5,010	C R T
179	AND logic 8: 8-bit output B	Output	5,010	C R T
180	AND logic 8: Block	Input	1,002	C W
181	OR logic 1: 1-bit switching output	Output	1,002	C R T
182	OR logic 1: 8-bit output A	Output	5,010	C R T
183	OR logic 1: 8-bit output B	Output	5,010	C R T
184	OR logic 1: Block	Input	1,002	C W
185	OR logic 2: 1-bit switching output	Output	1,002	C R T
186	OR logic 2: 8-bit output A	Output	5,010	C R T
187	OR logic 2: 8-bit output B	Output	5,010	C R T
188	OR logic 2: Block	Input	1,002	C W
189	OR logic 3: 1-bit switching output	Output	1,002	C R T
190	OR logic 3: 8-bit output A	Output	5,010	C R T
191	OR logic 3: 8-bit output B	Output	5,010	C R T
192	OR logic 3: Block	Input	1,002	C W
193	OR logic 4: 1-bit switching output	Output	1,002	C R T
194	OR logic 4: 8-bit output A	Output	5,010	C R T
195	OR logic 4: 8-bit output B	Output	5,010	C R T
196	OR logic 4: Block	Input	1,002	C W
197	OR logic 5: 1-bit switching output	Output	1,002	C R T
198	OR logic 5: 8-bit output A	Output	5,010	C R T
199	OR logic 5: 8-bit output B	Output	5,010	C R T
200	OR logic 5: Block	Input	1,002	C W
201	OR logic 6: 1-bit switching output	Output	1,002	C R T
202	OR logic 6: 8-bit output A	Output	5,010	C R T
203	OR logic 6: 8-bit output B	Output	5,010	C R T
204	OR logic 6: Block	Input	1,002	C W

No.	Name	Function	DPT	Flags
205	OR logic 7: 1-bit switching output	Output	1,002	C R T
206	OR logic 7: 8-bit output A	Output	5,010	C R T
207	OR logic 7: 8-bit output B	Output	5,010	C R T
208	OR logic 7: Block	Input	1,002	C W
209	OR logic 8: 1-bit switching output	Output	1,002	C R T
210	OR logic 8: 8-bit output A	Output	5,010	C R T
211	OR logic 8: 8-bit output B	Output	5,010	C R T
212	OR logic 8: Block	Input	1,002	C W
213	Logic input 1	Input	1,002	C W
214	Logic input 2	Input	1,002	C W
215	Logic input 3	Input	1,002	C W
216	Logic input 4	Input	1,002	C W
217	Logic input 5	Input	1,002	C W
218	Logic input 6	Input	1,002	C W
219	Logic input 7	Input	1,002	C W
220	Logic input 8	Input	1,002	C W
221	Logic input 9	Input	1,002	C W
222	Logic input 10	Input	1,002	C W
223	Logic input 11	Input	1,002	C W
224	Logic input 12	Input	1,002	C W
225	Logic input 13	Input	1,002	C W
226	Logic input 14	Input	1,002	C W
227	Logic input 15	Input	1,002	C W
228	Logic input 16	Input	1,002	C W
229	Display contrast (1 = higher 0 = lower)	Input	1,002	C R W
230	Date for display	Input	11,001	C U W
231	Time for display	Input	10,001	C U W
232	8-bit object 1 for display	Input	5.xxx	C R W
233	8-bit object 2 for display	Input	5.xxx	C R W
234	8-bit object 3 for display	Input	5.xxx	C R W
235	16-bit object 1 for display	Input	9.xxx	C R W
236	16-bit object 2 for display	Input	9.xxx	C R W
237	Text message 1 for display	Input	16,000	C R W
238	Text message 2 for display	Input	16,000	C R W
239	Display_Return approval	Input	1,001	C W
240	Pushbutton 1 long-term	Output	1,008	C R T
241	Pushbutton 1 short-term	Output	1,010	C R T

No.	Name	Function	DPT	Flags
242	Pushbutton 1 switching	Input/Output	1,001	C R W T
243	Pushbutton 1 Relative dimming	Input/Output	3,007	C R W T
244	Pushbutton 1 encoder 8 bit	Output	5*	C R T
245	Pushbutton 1 encoder 16 bit	Output	9*	C R T
246	Pushbutton 1 Scenario	Output	18,001	C R T
247	Pushbutton 2 long-term	Output	1,008	C R T
248	Pushbutton 2 short-term	Output	1,010	C R T
249	Pushbutton 2 switching	Input/Output	1,001	C R W T
250	Pushbutton 2 Relative dimming	Input/Output	3,007	C R W T
251	Pushbutton 2 encoder 8 bit	Output	5*	C R T
252	Pushbutton 2 encoder 16 bit	Output	9*	C R T
253	Pushbutton 2 Scenario	Output	18,001	C R T

4. Parameter setting

4.1. Behaviour on power failure/ restoration of power

Behaviour following a failure of the bus power supply:

The device sends nothing.

Behaviour on bus restoration of power and following programming or reset:

The device sends all outputs according to their send behaviour set in the parameters with the delays established in the "General settings" parameter block. The "Software version" communications object is sent once after 5 seconds.

4.2. General settings

Set the basic data transfer characteristics and select whether or not malfunction objects should be sent.

Send delay after power-up and programming for:	
Measured values	5 s • ... • 2 h
Threshold values and switching outputs	5 s • ... • 2 h
Controller objects	5 s • 10 s • ... • 2 h
Logic outputs	5 s • <u>10 s</u> • ... • 2 h

Maximum telegram quota	<ul style="list-style-type: none"> 1 message per second ... 5 messages per second ... 20 messages per second
Use CO2 malfunction object	Yes • <u>No</u>

4.3. CO2 measured value

Use **Offsets** to adjust the readings to be sent.

Offset in ppm	-100...100; 0
---------------	---------------

The unit can calculate a **mixed value** from its own reading and an external value. Set the mixed value calculation if desired.

Use external reading	Yes • <u>No</u>
Ext. Reading proportion of the total reading	5% • 10% • ... • <u>50%</u> • ... • 100%
Send internal and total reading	<ul style="list-style-type: none"> never periodically On change on change and periodically
From change of (if sent on change)	2% • <u>5%</u> • 10% • 25% • 50% (relative to the last reading)
Send cycle (if sent periodically)	<u>5 s</u> • ... • 2 h

Note: if an external portion is used, all of the following settings (threshold values, etc.) are related to the overall reading!

The **maximum readings** can be saved and sent to the bus. Use the "Reset CO₂ max. value" object to reset the value to the current reading.

Use maximum value	Yes • <u>No</u>
-------------------	-----------------

Note: The values are not retained after a reset.

4.4. CO2 threshold values

Activate the threshold values that you want to use here. The **Sensor KNX AQS-B-UP** provides three four threshold values for carbon dioxide.

Use threshold value 1/2/3/4	Yes • <u>No</u>
-----------------------------	-----------------

Table of CO₂ values:

1000 ppm corresponds to 0.1% CO₂ content.

300 ... 500 ppm	Fresh air
1500 ... 3000 ppm	"Stale" air
5000 ppm	Maximum allowable concentration

4.4.1. Threshold value 1, 2, 3, 4: CO2

Threshold value

Set the threshold values directly in the application program using parameters, or define them via the bus using a communications object.

Threshold value setpoint using parameter:

Set the threshold values and hysteresis directly.

Threshold value setpoint using	Parameter • Communications object
Threshold value in ppm	0...5000; <u>1200</u>
Hysteresis of the threshold value in %	0 ... 50; <u>20</u>

Threshold value setpoint using a communications object:

Beforehand, enter how the threshold value will be received from the bus. Basically, a new value can be received, or simply a command to increase or decrease.

During initial commissioning, a threshold value must be defined which will be valid until the 1st communication of a new threshold value. For units which have already been taken into service, the last communicated threshold value can be used. Basically, a temperature range is given in which the threshold value can be changed (object value limit).

A set threshold value will be retained until a new value or a change is transferred. The current value is saved in EEPROM, so that this is retained in the event of a power supply failure and will be available once the power supply is restored.

Threshold value setpoint using	Parameter • Communications object
The last communicated value should be retained	<ul style="list-style-type: none"> never after restoration of power after restoration of power and programming
Start threshold value in ppm valid till 1st communication	0...5000; <u>1200</u>
Object value limit (min) in ppm	0...5000
Object value limit (max) in ppm	<u>0...5000</u>
Type of threshold change	<u>Absolute value</u> • Increase/decrease
Step size (upon increase/decrease change)	1 • 2 • 5 • 10 • <u>20</u> • 50 • 100 • 200
Hysteresis of the threshold value in %	0 ... 50; <u>20</u>

Switching output

Set the behaviour of the switching output when a threshold value is exceeded/undercut. The output switching delay can be set using objects or directly as a parameter.

When the following conditions apply, the output is (LV = Threshold value)	<ul style="list-style-type: none"> • LV above = 1 LV - hysteresis below = 0 • LV above = 0 LV - hysteresis below = 1 • LV below = 1 LV + hysteresis above = 0 • LV below = 0 LV + hysteresis above = 1
Delays can be set via objects (in seconds)	<u>No</u> • Yes
Switching delay from 0 to 1 (when delay is not set using objects)	<u>None</u> • 1 s • 2 s • 5 s • 10 s • ... • 2 h
Switching delay from 1 to 0 (when delay is not set using objects)	<u>None</u> • 1 s • 2 s • 5 s • 10 s • ... • 2 h
Switching output sends	<ul style="list-style-type: none"> • <u>on change</u> • on change to 1 • on change to 0 • on change and periodically • on change to 1 and periodically • on change to 0 and periodically
Send cycle (is only sent if "periodically" is selected)	<u>5 s</u> • 10 s • 30 s ... • 2 h

Block

The switching output can be blocked using an object. Define specifications here for the behaviour of the output when blocked.

Use switching output block	<u>No</u> • Yes
Analysis of the blocking object	<ul style="list-style-type: none"> • At value 1: block At value 0: release • At value 0: block At value 1: release
Blocking object value before 1st communication	<u>0</u> • 1
Behaviour of the switching output	
With blocking	<ul style="list-style-type: none"> • <u>Do not send message</u> • send 0 • send 1
On release (with 2 seconds release delay)	[Dependent on the "Switching output sends" setting]

The behaviour of the switching output on release is dependent on the value of the parameter "Switching output sends" (see "Switching output")

Switching output sends on change	<ul style="list-style-type: none"> • Do not send message • Send switching output status
Switching output sends on change to 1	<ul style="list-style-type: none"> • Do not send message • If switching output = 1 → send 1
Switching output sends on change to 0	<ul style="list-style-type: none"> • Do not send message • If switching output = 0 → send 0
Switching output sends on change and periodically	Send switching output status

Switching output sends on change to 1 and periodically	If switching output = 1 → send 1
Switching output sends on change to 0 and periodically	If switching output = 0 → send 0

4.5. CO2 PI control

If you activate air quality control, you can use the following settings to define control type, target values, and ventilation.

Use control

Yes • No

General control

The **Sensor KNX AQS-B-UP** can be used to control one or two-stage ventilation.

Type of control	<ul style="list-style-type: none"> • <u>One-stage ventilation</u> • <u>Two-stage ventilation</u>
-----------------	--

Configure a block for the ventilation control using the blocking object.

Behaviour of the blocking object with value	<ul style="list-style-type: none"> • <u>1 = Block 0 = release</u> • <u>0 = block 1 = release</u>
Blocking object value before 1st communication	<u>0 • 1</u>

Determine when the current control settings are to be sent to the bus. Periodic transmission is safer if a message does not reach a recipient. You may also set up periodic monitoring using an actuator with this setting.

Actuating variable comparator	<ul style="list-style-type: none"> • <u>on change</u> • <u>on change and periodically</u>
Send cycle (is only sent if "periodically" is selected)	<u>5 s • ... • 5 min • ... • 2 h</u>

The status object shows the current status of the output variable (0 = OFF, >0 = ON) and can for example be used for visualisation.

Send status object(s)	<ul style="list-style-type: none"> • <u>on change</u> • <u>on change to 1</u> • <u>on change to 0</u> • <u>on change and periodically</u> • <u>on change to 1 and periodically</u> • <u>on change to 0 and periodically</u>
Send cycle (is only sent if "periodically" is selected)	<u>5 s • ... • 5 min • ... • 2 h</u>

Controller target value

The target values can be set directly in the application program using parameters, or be defined via the bus using a communications object.

Target value setting using parameter:

Set the target value directly.

Target value setpoint using	Parameter • Communications object
Target value in ppm	400...5000; <u>800</u>

Setting a target value via communications object:

Enter how the target value will be received from the bus in advance. Basically, a new value can be received, or simply a command to increase or decrease.

During initial commissioning, a target value must be provided which will be valid until the 1st communication of a new target value. For units which have already been taken into service, the last communicated target value can be used. Basically, an air humidity range is given in which the target value can be changed (object value limit).

A set target value will be retained until a new value or a change is transferred. The current value is saved in EEPROM, so that this is retained in the event of a power supply failure and will be available once the power supply is restored.

Threshold value setpoint using	Parameter • Communications object
The last communicated value should be retained	<ul style="list-style-type: none"> • <u>never</u> • after restoration of power • after restoration of power and Programming
Start target value in ppm valid till 1st communication (not upon saving the target value after programming)	400... 5000; <u>800</u>
Object value limit (min) in 0.1°C	400...5000; <u>400</u>
Object value limit (max) in 0.1°C	400...5000; <u>1500</u>
Type of threshold change	<u>Absolute value</u> • Increase/decrease
Step size in ppm (upon increase/decrease change)	1 • 2 • 5 • ... • <u>20</u> • ... • 100 • 200

Ventilation control

Depending on the control mode, one and/or two setting sections for the ventilation stages are displayed.

For two-stage ventilation, the target value difference between the two stages must be defined, i.e. the target value which, when exceeded, triggers the switch to the 2nd stage.

Target value difference between levels 1 and 2 Stage in ppm <i>(for stage 2 only)</i>	100...4000; <u>400</u>
--	------------------------

Determine the deviation from the target value at which the maximum variable value is reached, i.e. the point at which maximum output is used.

The reset time shows how quickly the control responds to deviations from the target value. In case of a short reset time, the control responds with a fast increase of the variable. In case of a long reset time, the control responds somewhat less urgently and needs longer until the necessary variable for the target value deviation is reached. You should set the time appropriate to the ventilation system at this point (follow the manufacturer's instructions).

Maximum control variable is reached at target value/actual difference of (in ppm)	100...4000; <u>100</u>
Reset time in minutes	1...255; <u>10</u>

Now determine what should be sent when the control is blocked.

On release, the control variable follows the rule again.

When blocked, the variable shall	<ul style="list-style-type: none"> • <u>not be sent</u> • send a specific value
Value <i>(if a value is sent for one 1-bit object)</i>	<u>0 • 1</u>
Value (in %) <i>(if a value is sent for an 8-bit object)</i>	<u>0...100</u>

4.6. Variable comparator

The two integrated control variable comparators can output maximum, minimum and median values.

Use comparator 1/2	<u>No • Yes</u>
--------------------	-----------------

4.6.1. Control variable comparator 1/2

Determine what the control variable comparator should output, and activate the input objects to be used. Send behaviour and blocks can also be set.

Output delivered	<ul style="list-style-type: none"> • Maximum value • Minimum value • <u>Average value</u>
Use input 1/2/3/4/5	<u>No • Yes</u>

Output sends	<ul style="list-style-type: none"> • <u>on change of output</u> • on change of output and periodically • when receiving an input object • when receiving an input object and periodically
Send cycle (<i>is only sent if "periodically" is selected</i>)	5 s • 10 s • 30 s • ... • <u>5 min</u> • ... • 2 h
From change of (<i>is only sent if "on change" is selected</i>)	<u>1%</u> • 2% • 5% • 10% • 20% • 25%
Analysis of the blocking object	<ul style="list-style-type: none"> • at value 1: block at value 0: release • at value 0: block at value 1: release
Blocking object value before 1st communication	0 • 1
Behaviour of the switching output	
With blocking	<ul style="list-style-type: none"> • <u>do not send message</u> • Send value
Sent value in %	0 ... 100
on release, output is sent (with 2 seconds release delay)	<ul style="list-style-type: none"> • <u>the current value</u> • the current value after receipt of an object

4.7. Logic

Activate the logic inputs and assign object values up to 1st communication. Then, activate the required logic outputs.

Use logic inputs	<u>No</u> • Yes
Object value prior to 1. communication for:	
Logic input 1... 16	0 • 1

AND logic

Logic 1/2/3/4/5/6/7/8	<u>not active</u> • active
-----------------------	----------------------------

OR logic

Logic 1/2/3/4/5/6/7/8	<u>not active</u> • active
-----------------------	----------------------------

4.7.1. AND and/or OR logic 1/2/3/4/5/6/7/8

AND- and OR logic gates provide the same setting options. Assign the inputs to a switching event and set the send behaviour.

1. / 2. / 3. / 4. Input	<ul style="list-style-type: none"> • <u>do not use</u> • all switching events which are available to the sensor (siehe <i>AND logic connection inputs</i>, Seite 23)"
Logic output sends	<ul style="list-style-type: none"> • <u>one 1-bit object</u> • two 8-bit objects

If the logic output sends one 1-bit object:

Logic output sends	one 1 bit object
if logic = 1 → object value	<u>1 • 0</u>
if logic = 0 → object value	<u>0 • 1</u>

If the logic output sends two 8-bit objects:

Logic output sends	two 8 bit objects
Type of objects	<ul style="list-style-type: none"> • <u>Value (0 ... 255)</u> • Percent (0% ... 100%) • Angle (0°... 360°) • Scenario load (0 ... 127)
if logic = 1 → object A value	Setting dependent on "type of object"
if logic = 0 → object A value	Setting dependent on "type of object"
if logic = 1 → object B value	Setting dependent on "type of object"
if logic = 0 → object B value	Setting dependent on "type of object"
Send behaviour	<ul style="list-style-type: none"> • <u>on change of logic</u> • on change of logic to 1 • on change of logic to 0 • on change of logic and periodically • on change of logic to 1 and periodically • on change of logic to 0 and periodically • on change of logic + receipt of object • on change of logic + receipt of object and periodically
Send cycle (is only sent if "periodically" is selected)	<u>5 s</u> • 10 s • 30 s • 1 min • ... • 2 h

Block

Logic outputs can also be blocked using objects.

Analysis of the blocking object	<ul style="list-style-type: none"> • <u>at value 1: block</u> <u>at value 0: release</u> • <u>at value 0: block</u> <u>at value 1: release</u>
Blocking object value before 1st communication	<u>0 • 1</u>

Behaviour of the switching output	
With blocking	<ul style="list-style-type: none"> • do not send message • send value for logic = 0 • send value for logic = 1

Behaviour on release of the switching output is dependent on send behaviour

Value of the parameter "Send behaviour":	Settings options "Behaviour of the switching output on release":
on change of logic	<ul style="list-style-type: none"> • do not send message • send value for current logic status
on change of logic to 1	<ul style="list-style-type: none"> • do not send message • if logic = 1 → send value for 1
on change of logic to 0	<ul style="list-style-type: none"> • do not send message • if logic = 0 → send value for 0
on change of logic and periodically	send value for current logic status (no selection)
on change of logic to 1 and periodically	if logic = 1 → send value for 1 (no selection)
on change of logic to 0 and periodically	if logic = 0 → send value for 0 (no selection)
on change of logic and receipt of object	<ul style="list-style-type: none"> • do not send message • Status object/s send/s
on change of logic and receipt of object and periodically	send value for current logic status (no selection)

4.7.2. AND logic connection inputs

do not use
 Logic input 1
 Logic input 1 inverted
 Logic input 2
 Logic input 2 inverted
 Logic input 3
 Logic input 3 inverted
 Logic input 4
 Logic input 4 inverted
 Logic input 5
 Logic input 5 inverted
 Logic input 6
 Logic input 6 inverted
 Logic input 7
 Logic input 7 inverted
 Logic input 8
 Logic input 8 inverted
 Logic input 9
 Logic input 9 inverted

Logic input 10
Logic input 10 inverted
Logic input 11
Logic input 11 inverted
Logic input 12
Logic input 12 inverted
Logic input 13
Logic input 13 inverted
Logic input 14
Logic input 14 inverted
Logic input 15
Logic input 15 inverted
Logic input 16
Logic input 16 inverted
CO2 sensor malfunction = ON
CO2 sensor malfunction = OFF
Switching output CO2 1
Switching output CO2 1 inverted
Switching output CO2 2
Switching output CO2 2 inverted
Switching output CO2 3
Switching output CO2 3 inverted
Switching output CO2 4
Switching output CO2 4 inverted
CO2 controller status ventilation 1
CO2 controller status ventilation 1 inverted
CO2 controller status ventilation 2
CO2 controller status ventilation 2 inverted

4.7.3. Connection inputs of the OR logic

The OR logic connection inputs correspond to those of the AND logic. In addition the following inputs are available for the OR logic:

AND logic 1
AND logic output 1 inverted
AND logic output 2
AND logic output 2 inverted
AND logic output 3
AND logic output 3 inverted
AND logic output 4
AND logic output 4 inverted
AND logic output 5
AND logic output 5 inverted
AND logic output 6
AND logic output 6 inverted
AND logic output 7
AND logic output 7 inverted
AND logic output 8

AND logic output 8 inverted

4.8. Display settings

Values and text can be displayed over two or three lines in the display. These can be internal readings or external data received from the bus. The input objects must be activated in order to be able to select external data.

Two-line display: Line 1 upper case, Line 2 upper case

Three-line display: Line 1 lower case, Line 2 upper case, Line 3 lower case

Use object "display contrast"	<u>No</u> • Yes
Display mode	<ul style="list-style-type: none"> two lines (with optional thermostat display) <u>three lines</u> (with optional thermostat display) Permanent thermostat

If **Values** (two or three lines) are displayed, the contents of the lines must be defined and where required, the input objects activated for external values.

Use input objects	<u>No</u> • Yes
Selection for content	<ul style="list-style-type: none"> Do not display Inside CO2 reading Outside CO2 reading Total CO2 reading Datum (<i>lower case only</i>) Time Value of 8 bit object 1/2/3 Value of 16-bit object 1/2 (<i>lower case only</i>) Text message 1/2 (<i>lower case only</i>)

4.9. Pushbutton interface 1/2

Activate the pushbutton interfaces as desired. Pushbutton interface 1 is linked to the left-hand pushbutton, interface 2 to the right-hand button.

Use pushbutton interface	<u>No</u> • Yes
--------------------------	-----------------

Select pushbutton function:

Function	<ul style="list-style-type: none"> • <u>Switch</u> • Changeover switch • Shutter • Roller blind • Awning • Window • Dimmer • 8-bit encoder • 16-bit encoder • Scenario recall
----------	---

Switch:

If the pushbutton is to be used as a switch, select the function "Switch" and define which values are sent when the button is pressed/released, and when these are sent.

Function	Switch
Command when pressing the pushbutton	<ul style="list-style-type: none"> • send 0 • send 1 • Do not send message
Command when releasing the pushbutton	<ul style="list-style-type: none"> • send 0 • send 1 • Do not send message
Send value	<ul style="list-style-type: none"> • <u>on change</u> • on change to 1 • on change to 0 • on change and periodically • on change to 1 and periodically • on change to 0 and periodically
Value send all (is only sent if "periodically" is selected)	5 s ... 2 h

Changeover switching:

If the pushbutton is to be used for changeover switching, select the function "Changeover switching" and define which values are sent when the button is pressed/released, and when these are sent.

Function	Changeover switching
Command when pressing the pushbutton	<ul style="list-style-type: none"> • Changeover switching • Do not send message
Command when releasing the pushbutton	<ul style="list-style-type: none"> • Changeover switching • Do not send message

Shutter, blind, awning or window control:

If you want to actuate a drive using a pushbutton, select the "shutter", "awning", "blind", or "window" function and define the pushbutton function and control mode.

Function	Shutter/blind/awning/window
Pushbutton function	Up • Down Up • Down • Up/Down On • Off • On/Off Open • Close • Open/ Close
Control mode*	• <u>Standard</u> • Standard inverted • Comfort mode • Dead man's switch

* For further details about settings, please see  *Control modes for drive control*, page 28

Dimmer:

If the pushbutton should be used as a dimmer, select the function "Dimmer" and define the pushbutton function, time interval (switching/dimming) and if required, the repeat interval for extended pressing of the pushbutton.

Bus function	Dimmer
Pushbutton function	<u>Brighter</u> • darker • Brighter/darker
Time between switching and dimming in 0.1 seconds	1...50; <u>5</u>
Repetition of the dimming command	<u>no</u> • yes
Repetition of the dimming command upon extended button actuation (only if dimmer command is repeated)	every 0.1 s... • every 2 s; <u>every 1 s</u>
Dimming by (only if dimmer command is repeated)	1.50% • 3% • <u>6%</u> • 12,50% • 25% • 50%

8 bit encoder:

If a fixed 8-bit value should be sent using the pushbutton, select the "8-bit encoder" function and define the value to be sent

Bus function	8 bit encoder
Value	<u>0</u> ...255

16 bit encoder:

If a fixed 16-bit value should be sent using the pushbutton, select the "16-bit encoder" function and define the value to be sent

Bus function	16 bit encoder
Value in 0.1	<u>-6707600</u> ...6707600; <u>0</u>

Scenario control:

If a scenario should be loaded using the pushbutton, select the "Scenario load" function and define a scenario number.

Bus function	Scenario recall
Scenario no.	<u>0...127</u>

4.9.1. Control modes for drive control

Standard:

If briefly operated, the drive will move incrementally or stops. If operated longer, the drive will move up to the end position. The time difference between "short" and "long" is set individually.

Control mode	Standard
Behavior during button operation: short = stop/increment long = Up or Down	
Time between short and long in 0.1 seconds	<u>1...50; 10</u>

Standard inverted:

When pushed shortly, the drive moves up to the end position. When pushed for longer, the drive moves incrementally or stops. The time difference between "short" and "long" and the repeat interval is set individually.

Control mode	Standard inverted
Behavior during button operation: short = Up or Down long = Stop/Step	
Time between short and long in 0.1 seconds	<u>1...50; 10</u>
Repeat the step command for a long button press	<u>every 0.1 s • every 2 sec; every 0.5 sec</u>

Comfort mode:

In the **comfort mode** pushing the button briefly, a bit longer and long will trigger different responses of the drive. The time intervals are set individually.

By pushing the button (shorter than adjustable time 1) the drive will be positioned (resp. stopped) incrementally.

If the drive is to be moved a bit farther, then a little longer push is needed (longer than time 1 but shorter than time 1+2). The drive stops immediately when releasing the button.

If the drive must be moved independently into the end position, the button is released only after times 1 + 2 have expired. The move can be stopped by briefly pushing.

*Fig. 4
Time interval comfort mode diagram*



Point in time 0:

Push of button, start of time 1

Release before time 1 expired:

step (or stop if drive is moving)

Point in time 1:

End of time 1, start of time 2

Moving command

Release after time 1 expired

Stop

but before time 2 expires:

Move into end position

Release after time 1 + 2 expired:

Control mode

Behavior during button operation:
Button is pushed and released before time 1 expired = stop/step
held longer than time 1 = Up or Down
released between time 1 and 1-2= stop
released after time 1 +2 = no more stop

Comfort mode

Control mode	Comfort mode
Behavior during button operation: Button is pushed and released before time 1 expired = stop/step held longer than time 1 = Up or Down released between time 1 and 1-2= stop released after time 1 +2 = no more stop	
Time 1	0.0s ... • 2 s; <u>0.4 s</u>
Time 2	0 s • 2 s; <u>2 s</u>

Time 1

0.0s ... • 2 s; 0.4 s

Time 2

0 s • 2 s; 2 s

Dead man's switch:

The drive moves as soon as the button is pushed and stops as soon as the button is released.

Control mode	Dead man's switch
Behavior during button operation: Push button = Up or Down command Release button = Stop command	



Elsner Elektronik GmbH Control and Automation Technology

Sohlengrund 16 Phone +49(0)7033/30945-0 info@elsner-elektronik.de
75395 Ostelsheim Fax +49(0)7033/30945-20 www.elsner-elektronik.de
Germany

Technical support: +49 (0) 70 33 / 30 945-250