

4-channel binary input 230 V

Order no.: 1067 00

6-channel binary input 24 V

Order no.: 1068 00

8-channel binary input 230 V

Order no.: 1069 00

System information

This unit is a product of the Instabus-EIB-System and corresponds to the EIBA Guidelines. Detailed technical knowledge acquired in Instabus training courses is a prerequisite for the understanding of the system. The functions of the device are software-dependent.

Detailed information on the software and the functions implemented and the software itself are available from the manufacturer's product data bank.

Planning, installation and commissioning of the device are effected with the help of EIBA-certified software.

For the productdatabase and technical descriptions please refer to the Gira Datenpool CD, order no. 1992 10, or to the internet at www.gira.de offering up-to-date information.

Function

The binary inputs can detect the presence and the change of signal voltages at their signal inputs.

Binary inputs can therefore be used to request the status of conventional pushbuttons/switches, auxiliary contacts, door and window contacts and - depending on programmed parameters - to transmit the switching status as digital information to the Instabus EIB.

The inputs can be used independent of each other. Each input is equipped with an LED indicating the status of the contact connected.

Signal voltages can be applied to all inputs at the same time (100 % duty cycle).

The signal voltages of 24 V AC/DC or 230 V AC to be supervised must be available externally.

**Safety instructions**

Attention: Electrical equipment must be installed and fitted by qualified electricians only.

Non-observance of the installation instructions may cause fire or other hazards.

Disconnect the mains voltage before connecting the inputs.

Features

- Status indication for each input
- Different phases possible with the 230 V versions
- Separate reference potential for each input with 230 V versions
- Separate reference potentials (GND) for inputs 1 through 3 and 4 through 6 with the 24 V versions
- Supplementary software-independent debouncing circuits for the inputs integrated

Connection

8-channel binary input 230 V (fig. A)

4-channel binary input 230 V (fig B)



The bus is connected via the bus connection terminal (1).

The contacts are connected as shown in fig. A or fig. B.

The reference potential N must be connected separately for each input.

The inputs (E1 through E_n) can be connected to different phase conductors.

A signal at the input is indicated by the corresponding LED (2).

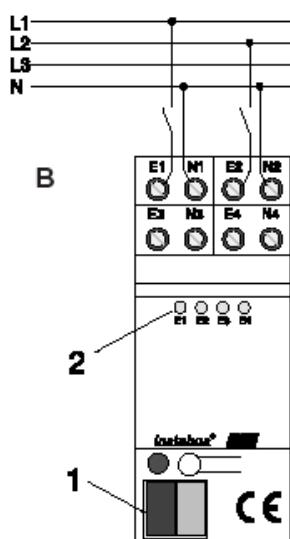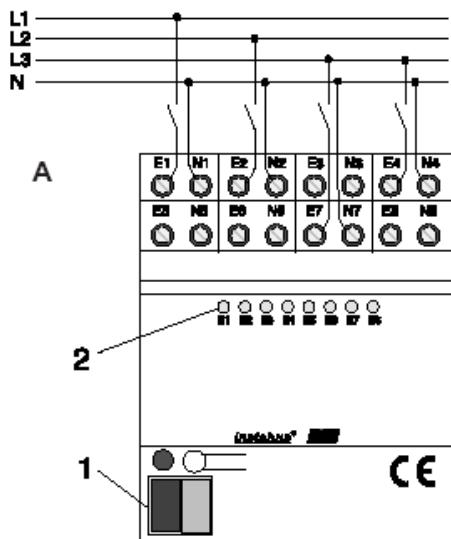

6-channel binary input 24 V (fig. C)

The bus is connected via the bus connection terminal (1).

The contacts are connected as shown in fig. C.

Reference potential GND must be connected separately for inputs 1 through 3 and 4 through 6.


In DC operation, the (E1 through E6) are independent of polarity.

When a signal is present at one of the inputs, the corresponding LED (2) is lit up.



Important:



For 24 V and 230 V voltages separate cables must be used.

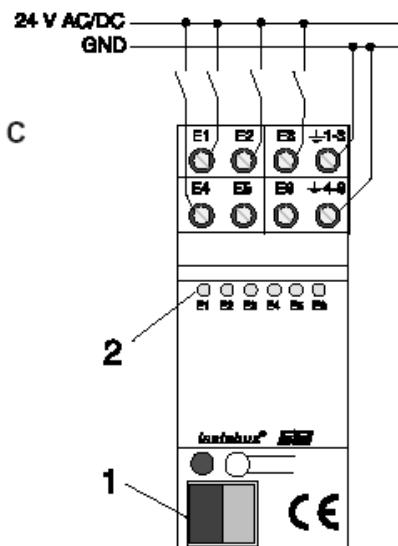

Cap

Slide the cap with the bus wires at the bottom over the bus terminal (fig. D) until it is heard to engage.

To remove the cap, push sideways and withdraw (fig. E).

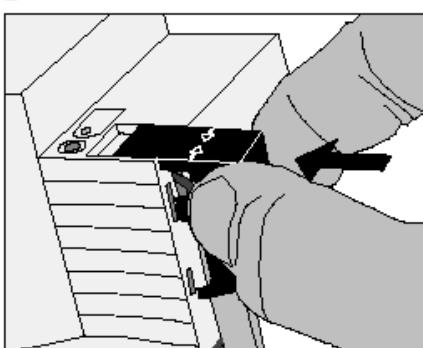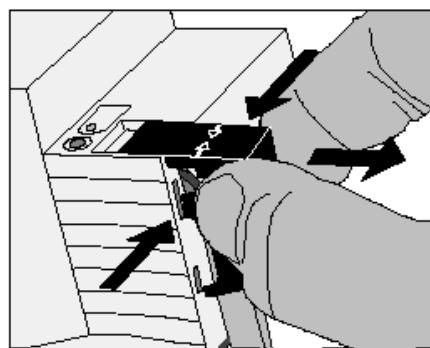D**E**

Technical Data

General:

Instabus EIB supply: 21 - 32 V DC

Instabus EIB power consumption

4-channel binary input 230 V:	max. 150 mW
8-channel binary input 230 V:	max. 240 mW
6-channel binary input 24 V:	max. 225 mW

Installation space requirements

4-channel binary input 230 V:	36 mm (2 module)
8-channel binary input 230 V:	72 mm (4 module)
6-channel binary input 24 V:	36 mm (2 module)

Ambient temperature: -5 °C ... +45 °C

Storage temperature: -25 °C ... +75 °C

Instabus EIB connection:

Instabus connecting terminal

Binary input connection:

Ø for binary inputs 230 V:

screw-type terminals
0,75 to 4 mm²
single-wire or
2 x 1,5 to 2,5 mm²
single-wire
0,75 to 4 mm²
stranded wire
without ferrule or
0,75 to 2,5 mm²
stranded wire
with ferrule

Ø for binary inputs 24 V:

0,2 to 4 mm² single-wire or
2 x 0,2 to 2,5 mm²
single-wire
0,75 to 4 mm²
stranded wire
without ferrule or
0,5 to 2,5 mm²
stranded wire with ferrule

General specification of inputs:

Minimum signal duration for pulse counting: 200 ms at 5 Hz signal clock with mark-to-space ratio 1:1

Signal delay (software-independent)
rising edge: ca. 2 ms
falling edge: ca. 40 ms

Length of input line: max. 100 m (unshielded)

Universal binary input 6-channel 24 V:

Signal voltage: 8 to 42 V AC/DC

Input current/channel: appr. 4 mA at 24 V AC/DC

Signal level
'0' signal: 0 to 1,8 V AC / - 42 to +1,8 V DC
'1' signal: 8 to 42 V AC/DC

Universal binary input 4-channel 230 V / 8-channel 230 V:

Signal voltage: 110 to 230 V AC, 50 / 60 Hz

Input current/channel: appr. 7 mA at 230 V AC

Signal level
'0' signal: 0 to 70 V AC
'1' signal: 90 to 253 V AC

Acceptance of guarantee

We accept the guarantee in accordance with the corresponding legal provisions.

Please return the unit postage paid to our central service department giving a brief description of the fault:

Gira
Giersiepen GmbH & Co. KG
Service Center
Dahlienstrasse 12
D-42477 Radevormwald

CE The CE sign is a free trade sign addressed exclusively to the authorities and does not include any warranty of any properties.

Gira
Giersiepen GmbH & Co. KG
Postfach 1220
D-42461 Radevormwald

Telefon: +49 / 21 95 / 602 - 0
Telefax: +49 / 21 95 / 602 - 339
Internet: www.gira.de