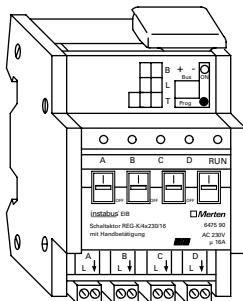


Switch actuator REG-K/4x230/16 with manual mode

Colour **Article no.**
light grey 647590

Table of Contents

1. Function	1
2. Installation	1
3. Commissioning	2
4. Technical Data	2
5. Settings in the EIB Tool Software (ETS)	3
6. Application overview	3

1. Function

The INSTABUS switch actuator REG-K/4x230/16 is used to switch luminaires and other loads. The device has four independent channels available (A, B, C, D).

Display elements:

A green LED indicates readiness for operation. It only lights up if the application program has been correctly loaded into the device. Four yellow LEDs display the switching state per channel. The LED lights up if the channel has been switched. A red LED is used to monitor the bus voltage and to enter the physical address.

Operating elements:

The switch output (switched outer conductor) can also be operated manually without bus voltage using the manual switch on top of the device. During manual operation, the yellow LED no longer indicates the actual status of the relay. The INSTABUS switch actuator is an intelligent relay with bus capability. The device has four switched relay outputs and enables the switching of luminaires and other loads.

2. Installation

The INSTABUS switch actuator REG-K/4x230/16 with manual mode is a DIN rail mounted device and is mounted on a DIN rail EN 50022-35. A data rail is not required.

Electrical connection:

The device is connected and operated according to the connection example.

The bus connection is carried out via the bus connecting terminal supplied with the device. Then place the cable cover over the bus connecting terminal to guarantee the safety clearance of the bus cable to the 230 V cables (in accordance with DIN VDE 0110 part 1). A maximum of 4 core pairs can be connected to the bus connecting terminal.

The cables to the loads as well as the mains voltage (L1, L2 or L3) are connected via screw terminals.

All devices that are mounted next to the switch actuator must at least be equipped with basic insulation.

**Caution:**

The switch outputs have bistable relays. The switch contact of the outputs can be changed to the enabled state due to strong vibrations during transportation. Voltage may be present at the outputs when the mains voltage is connected to the system! After commissioning, the outputs are moved to the required position by telegrams.

3. Commissioning

After wiring the device, the assignment of the physical address and the parameterisation are carried out:

- Connect the serial interface to the bus
- Connect the bus voltage to the system
- Press the programming button in the device (red LED lights up)
- Download the physical address from ETS (red LED is extinguished)
- Load the prepared parameterisation into the device

4. Technical Data

External auxiliary supply: none

Power supply from the bus: DC 24 V/<10 mA

Insulation voltage: 4 kV (bus - AC 230 V)

Fuse: Protect the switch contact with a series-connected 16 A circuit-breaker

Switch contact: 4 x make contacts, floating

Nominal voltage: AC 230 V, 50 to 60 Hz (L1, L2 or L3)

Nominal current: 16 A, cos φ = 1
10 A, cos φ = 0.6

Nominal capacity:

Incandescent lamps: AC 230 V, max. 3000 W

Halogen lamps: AC 230 V, max. 2000 W

Fluorescent lamps: AC 230 V, max. 1500 VA, with parallel compensation

Capacitive load: AC 230 V, max. 140 μ F

Minimum loads: ≥ 12 V AC/DC: ≥ 500 mA

Switching frequency: max. 10 per minute at nominal load

Service life:

AC 230 V, 16 A, cos φ = 1: 50,000 switching cycles

Halogen lamps, 2000 W: 25,000 switching cycles

Fluorescent lamps, 1500 VA: 20,000 switching cycles

Ambient temperature

Operation: -5 °C to +45 °C

Storage: -25 °C to +55 °C

Transport: -25 °C to +70 °C

Environment: The device is designed for use at a height up to 2000 m above sea level

Max. humidity: 93%, no moisture condensation

Operating elements: Programming button
Manual switch per channel for manual operation of the relay

Display elements:

Programming check: 1 red LED
Readiness for operation: 1 green LED

Status of the channels: 4 yellow LEDs

Connections


Bus: via two 1 mm pins for bus connecting terminal

Outer conductor: four 2-fold screw terminals for max. 2.5 mm²

Complies with EC guidelines: low voltage guideline 73/23/EEC; EMC guideline 89/336/EEC

Device width: 4 modules = 72 mm

Connection example:

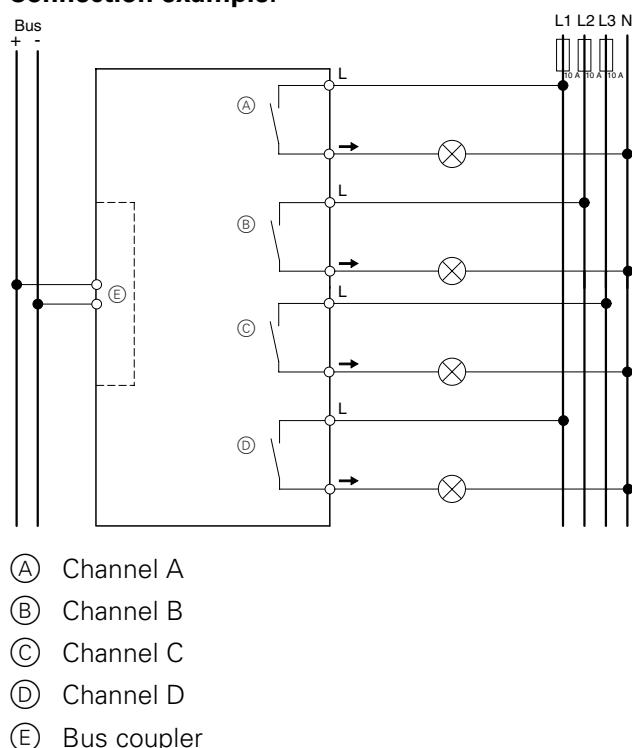

5. Settings in the EIB Tool Software (ETS)

Selection in the product database

Manufacturer: Merten
Product family: 4.4 Switch actuator, 4-gang
Product type: 4.4.01 DIN rail mounted REG-K
Program name: Switch Logic Prio. Disable Time
Stairc. Init. 4119/2.1
Product name: Switch actuator, 4-gang, REG-K/
4x230/16 with manual mode
Order number: 647590

**Hinweis:**

To guarantee the full functionality of the applications under ETS2, the ETS2 software from version 1.2 onwards must be used with Service Release A or higher. If you have any queries, please contact the Merten InfoLine.

6. Application overview

The following application is available:

Application	Vers.	Function
Switch Logic Prio. Disable Time Stairc. Init. 4119/2.1	2.1	Group addresses: Number = 30/Associations = 30, dynamic Make/break contact Disable function Status response Priority control (2 bit) or logic operation Staircase lighting function ON delay OFF delay Behaviour on bus voltage failure Behaviour on bus voltage recovery