

KNX - KNX blind actuators

SBA4-230 / 10 / H / KNX REG



white , Part No. 93930

Product Information

- The blind actuators KNX SBA receive KNX telegrams and control several blind motors with limit switches independently of one another
- Each channel is controlled with two monostable relays and can also be manually activated with the buttons at the actuator
- Each channel can be individually programmed through the ETS3/4. Status reports, blocking functions, central switch functions and extensive calibration and positioning functions are available for selection
- In the event of bus voltage failure or resumption, the switch positions of the relay can be individually programmed for each channel
- The device is planned for permanent installation on a DIN-rail (top-hat) in high voltage current distributors
- Installation must take place in dry interiors

Technical Data

Voltage:	230 V AC 50 Hz
Dimensions:	(4 TE) 86 x 72 x 60 mm
Output voltage:	230 V AC 50 Hz
Degree / class of protection:	IP20 / Class II
Ambient temperature:	0 °C to +45 °C
Housing:	Plastic LEXAN UL-94-V0
Display elements:	Red LED: Programming LED

Green LED: Channel status



Manual operation: Manual operation of the shutter channels directly on the device

KNX TP 256: Yes


Switching power: Roller shutter motors

Description

Description	Colour	Part number	EAN number
SBA4-230 / 10 / H / KNX REG	white	93930	4007529939305



Dimensions 93930

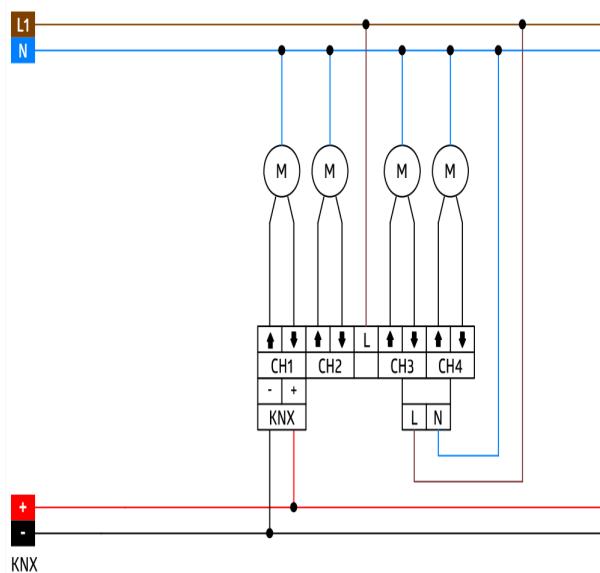

Wiring diagramms

© 2023 B.E.G. Brück Electronic GmbH