


RC KNX 001

Radio Frequency Remote Control

Description

- IR Remote control for movement detector parameters adjustment.
- Time delay, Brightness and sensitivity adjustment.
- Allowing adjustment of: Time Delay and Brightness.
- 3 advantages:
 - Save time in the installation.
 - Same adjustment for all motion detector of the same Installation.
 - Cancel potentiometer control which prevents unwanted manipulations. Función Permanente: la iluminación se mantiene encendida (On) o apagada (Off) durante 8 horas. Transcurrido este tiempo, el detector pasa a funcionamiento automático nuevamente.
- Possibility to copy an adjustment of one movement detector to others.

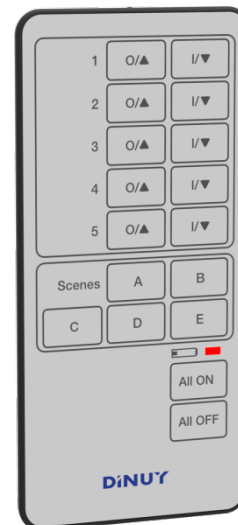

Technical Characteristics

Reference	RC KNX 001
Power Supply	1 battery of 3V CR2032 (included)
Estimated battery life	>4 años
Infrared	Focused emission and low range (2-3m at 35° maximum)
Compatible with	DM TEC 001, DM TEC 003, DM TEC 004, DM SEN T03, DM TEC PA1, DM SUP 000, DM SUP 002, DM CAM 001, DM CAM 002, DM TEC 241, DM TEC 243, DM TE1 001, DM TE1 DA1, DM TE1 002 y DM TE1 DA2
Dimensions	105 x 50 x 12mm
Protection Degree	IP51, Class II
Working Temperature	0°C ~ +45°C