

General Features




- Touch switches with metal or glass materials
- Can be configured with ETS3 / ETS4 / ETS5.
- Independent button configuration for each fold
- Different color options
- Easy mount into 60x60 mm standard switch junction boxes
- Dependent or independent programmable buttons
 - Switching
 - Dimming
 - Blind Control
 - Value transfer
 - Scene Control


Technical Data

Operating Voltage	- Voltage	21V... 30V DC, via the KNX bus
	- Current drawn from bus	<10mA
Safety Rating Class		IP 20, DIN EN 60529
		II EN 61140
Connections	- KNX	Bus Connection
Operating Temperature	- Ambient	-5° C + 45° C
	- Storage	-25° C + 55° C
	- Measurement Accuracy	±0,3 °C
Humidity	- Max. Air humidity	95% no moisture
	condensation	
Dimensions	Front Side	85 x 85 mm
	Side- Surface mounted part	11 mm
	Side- Flush mounted part	19.4 mm
Weight		73 g
Box Material	Metal or Glass, polycarbonate	
CE	In accordance with the EMC guideline and low voltage	

Functional Elements and Connections



1. Button groups

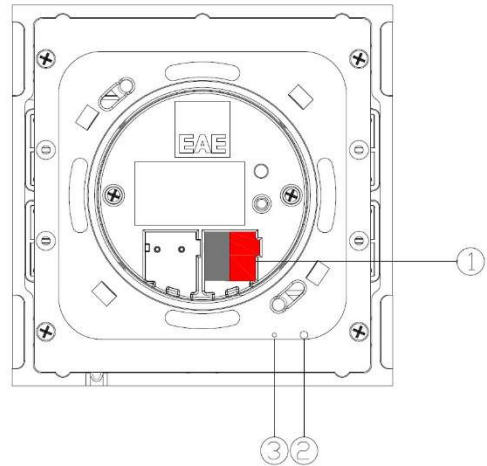

- 1. KNX Port Terminal
- 2. Programming Button
- 3. Programming LED

Technical Drawings

