



Order description	Order number	EAN code
AF 500/200 white	EL10520204	4015120520204
AF 500/200 black	EL10520211	4015120520211
AF 500/200 stainless steel appearance	EL10520228	4015120520228



Short description:

- 500 watt halogen floodlight with in-built motion detector with 200° viewing distance for convenient lighting control
- Default settings ensure immediate operability
- Additional control output
- Possibility to adjust floodlight head and motion detector in many ways
- Sensing and range adjustment by revolving and tilting spherical head technology
- Prevention of operating errors through in-built selector switch for test function/automatic operation
- One-handed plug-base installation for quick and easy installation
- Double diaphragm line entrance
- Two line entrances, optionally from the top, bottom or rear (self-sealing diaphragm)
- Plug-in terminal for through-wiring of the protective conductor included
- Protective cap with bayonet lock for setting elements. Prevents unintentional parameter adjustment and protects from atmospheric influences
- Special brackets for mounting on inner and outer corners, available as accessories

Technical data:

Mains voltage	230 V AC, 50 Hz
Approx. power consumption	0.8 W
For illuminants	150 - 500 W/R7s, 114 mm length (not included)
Viewing distance	200° sensor horizontally rotatable +/- 90°
Range	approx. 12 m, at an installation height of 2,5 m
Range adjustment	mechanically by tilting the motion detector head max 80°
Setting options	mechanically by adjusting controller
Switching capacity	230 V AC, 50 Hz, 1000 W/4.5 A (cos phi = 1), 500 VA/2.25 A (cos phi = 0.5)
Time setting	approx. 4 sec. - 10 mins.
Light value	approx. 2 - 1000 Lux
Protection type	IP 44
Protection class	I
Test symbol	TÜV Süd
Installation type	wall mounting, mounting on inner and outer corners possible with accessories
Approx. measurements	height 228 mm x width 215 mm x length 196 mm
Colour	white, similar to RAL 9010, black, similar to RAL 9005, stainless steel appearance

Accessories

- EL10520280 - AF corner bracket white



Order description

AF 500/200 white
AF 500/200 black
AF 500/200 stainless steel appearance

Order number


EL10520204
EL10520211
EL10520228

EAN code

4015120520204
4015120520211
4015120520228



Dimensions in mm

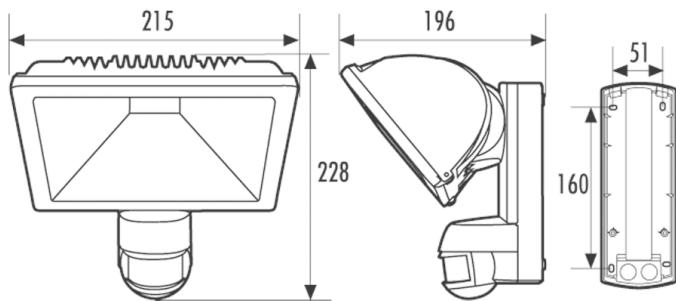


Schaltplan


Automatic-Strahler

AF 150/200 AF 150/200i
AF 300/200 AF 300/200i
AF 500/200 AF 500/200i


AF 300/200i LED




Standardbetrieb




Parallelschaltung von Automatic-Strahlern, max. Schaltleistung beachten!




Standardbetrieb mit zusätzlicher Dauerlichtfunktion durch externen Schalter.



Standardbetrieb mit zusätzlicher Möglichkeit des Einschaltens von Hand.



Standardbetrieb mit zusätzlichem Anschluss von externen Lasten.



Zusätzliche Anschlussmöglichkeit von weiteren Leuchten ohne Bewegungsmelder.

www.esylux.com