



Order description	Order number	EAN code
AF 150/200i white	EL10519802	4015120519802
AF 150/200i black	EL10519819	4015120519819
AF 150/200i stainless steel appearance	EL10519826	4015120519826



Short description:

- 150 watt halogen floodlight with in-built motion detector with 200° viewing distance for convenient lighting control
- Can be programmed by remote control, e.g. continuous light ON/OFF and automatic storage of the current light value
- Default settings ensure immediate operability
- Additional control output
- Possibility to adjust floodlight head and motion detector in many ways
- Sensing and range adjustment by revolving and tilting spherical head technology
- Prevention of operating errors through in-built selector switch for test function/automatic operation
- One-handed plug-base installation for quick and easy installation
- Double diaphragm line entrance
- Two line entrances, optionally from the top, bottom or rear (self-sealing diaphragm)
- Plug-in terminal for through-wiring of the protective conductor included
- Protective cap with bayonet lock for setting elements. Prevents unintentional parameter adjustment and protects from atmospheric influences
- Special brackets for mounting on inner and outer corners, available as accessories

Technical data:

Mains voltage	230 V AC, 50 Hz
Approx. power consumption	0.8 W
For illuminants	60 - 150 W/R7s, 75 mm long (not included)
Viewing distance	200° sensor horizontally rotatable +/- 90°
Range	approx. 12 m, at an installation height of 2,5 m
Range adjustment	mechanically by tilting the motion detector head max 80°
Setting options	mechanically by adjusting controller, electronically by infrared remote control Mobil-RCi-M (order separately)
Switching capacity	230 V AC, 50 Hz, 1000 W/4.5 A (cos phi = 1), 500 VA/2.25 A (cos phi = 0.5)
Time setting	approx. 4 sec. - 10 mins.
Light value	approx. 2 - 1000 Lux
Permissible ambient temperature	-20 °C...+40 °C
Protection type	IP 44
Protection class	I
Test symbol	TÜV Süd
Installation type	wall mounting, mounting on inner and outer corners possible with accessories
Approx. measurements	height 219 mm x width 141 mm x length 147 mm
Colour	white, similar to RAL 9010, black, similar to RAL 9005, stainless steel appearance

Accessories

- EL10520280 - AF corner bracket white
- EM10016011 - Mobil-RCi-M silver

Note: order remote control separately.



Order description

AF 150/200i white
AF 150/200i black
AF 150/200i stainless steel appearance

Order number


EL10519802
EL10519819
EL10519826

EAN code

4015120519802
4015120519819
4015120519826



Dimensions in mm


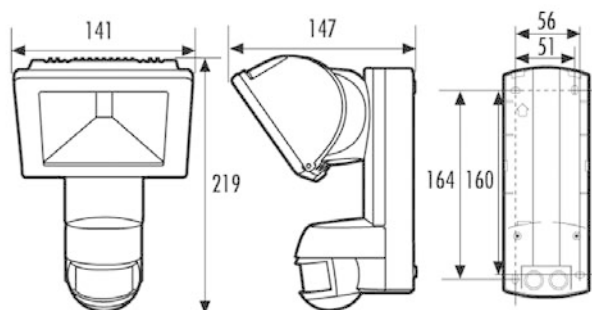


Schaltplan

Leuchten
AL Stockholm
AL Göteborg
AL London

AL Lissabon
AL Amsterdam

Strahler
AF S 150
AF S 300
AF S 500
AF S 300 LED



Standardbetrieb mit Ein-/Ausschalter.

www.esylux.com