


DATA SHEET




CU-DIN DIM 4-CH 1.5A KNX

Item number GTIN
EC10430312 4015120430312

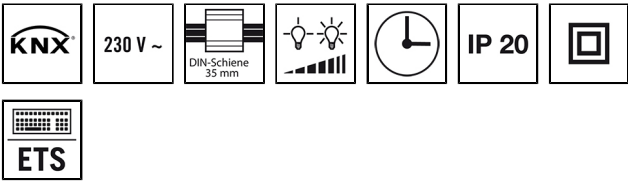

Product description

KNX DIN rail module, dimming actuator, 4-way, 1.5-A switching capacity per channel

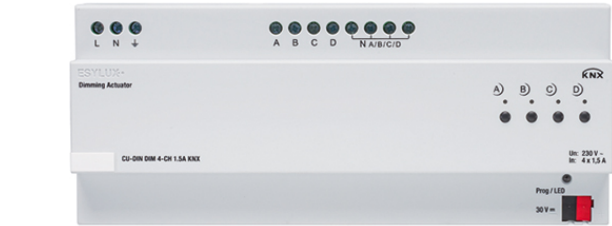

Technical data

GENERAL	
Device category	Actuator
User interface	ETS-Software
Remote controllable	–
Conformity	CE, EAC, RoHS, WEEE
Warranty	3-year
ATTACHMENT	
Installation type	DIN rail
Installation position	Switching cabinet
Installation dimension	Installation length: 90 mm x Installation width: 216 mm x Installation depth: 65 mm
Type of connection	Push terminal
Connectable wire cross section	0.20 – 6.00 mm ²
HOUSING	
Dimensions	Length 90 mm x Width 216 mm x Height/Depth 65 mm
Weight	757 g

Protection type	IP20
Permissible ambient temperature	-5 °C...+45 °C
Relative humidity	5 - 93 %, non-condensing
Colour	grey
ELECTRICAL VERSION	
Control system	KNX
Protection class	II
Nominal voltage	29 - 31 V DC / 50 - 60 Hz
Power consumption	0.4 W
Power consumption	15 mA
Stand-by consumption	< 0.4 W
AUTOMATION	
Number of inputs	0
Power loss	8 W
Rated current	1,5 A
Horizontal pitch (HP)	12

CU-DIN DIM 4-CH 1.5A KNX

Item number	GTIN
EC10430312	4015120430312

Dimension drawing

