

DATA SHEET

ESYLUX


CU-DIN SB 2-CH 10A KNX

Item number

EC10430343

GTIN

4015120430343

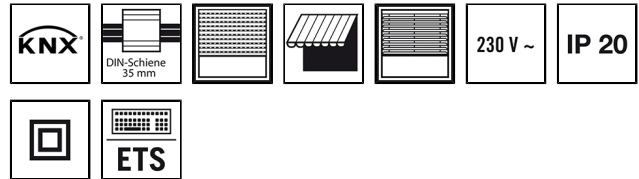

Product description

KNX DIN rail module, blind actuator, 4-way with 2 channels, 10-A switching capacity



Technical data

GENERAL

Device category	Actuator
User interface	ETS-Software
Remote controllable	–
Conformity	CE, EAC, RoHS, WEEE
Warranty	3-year

ATTACHMENT

Installation type	DIN rail
Installation position	Switching cabinet
Installation dimension	Installation length: 90 mm x Installation width: 72 mm x Installation depth: 65 mm
Type of connection	Push terminal
Connectable wire cross section	0.20 – 6.00 mm ²

HOUSING

Dimensions	Length 90 mm x Width 72 mm x Height/Depth 65 mm
Weight	202 g
Protection type	IP20
Permissible ambient temperature	0 °C...+45 °C
Relative humidity	5 - 93 %, non-condensing
Colour	grey

ELECTRICAL VERSION

Control system	KNX
Protection class	II
Nominal voltage	29 - 31 V DC
Power consumption	0.4 W
Power consumption	15 mA
Stand-by consumption	< 150 mW

AUTOMATION

Number of inputs	0
Power loss	2.7 W
Rated current	max. 10 A
Rated current (cos # = 0.8)	max. 10 A
Min. switching capacity	0,1mA / 1V
DC switching capacity (resistive load)	10 A / 12 V DC
Switching capacity incandescent lamps	1600 W
Switching capacity engines	746 W
Switching capacity inductive transformers	1000 W
Switching capacity fluorescent lamps (parallel compensated)	1000 W
Switching capacity fluorescent lamps (uncompensated)	800 W
Horizontal pitch (HP)	4

CU-DIN SB 2-CH 10A KNX

Item number	GTIN
EC10430343	4015120430343

Dimension drawing

