REF.953303 1/W VIDEO MILO PANEL BLACK

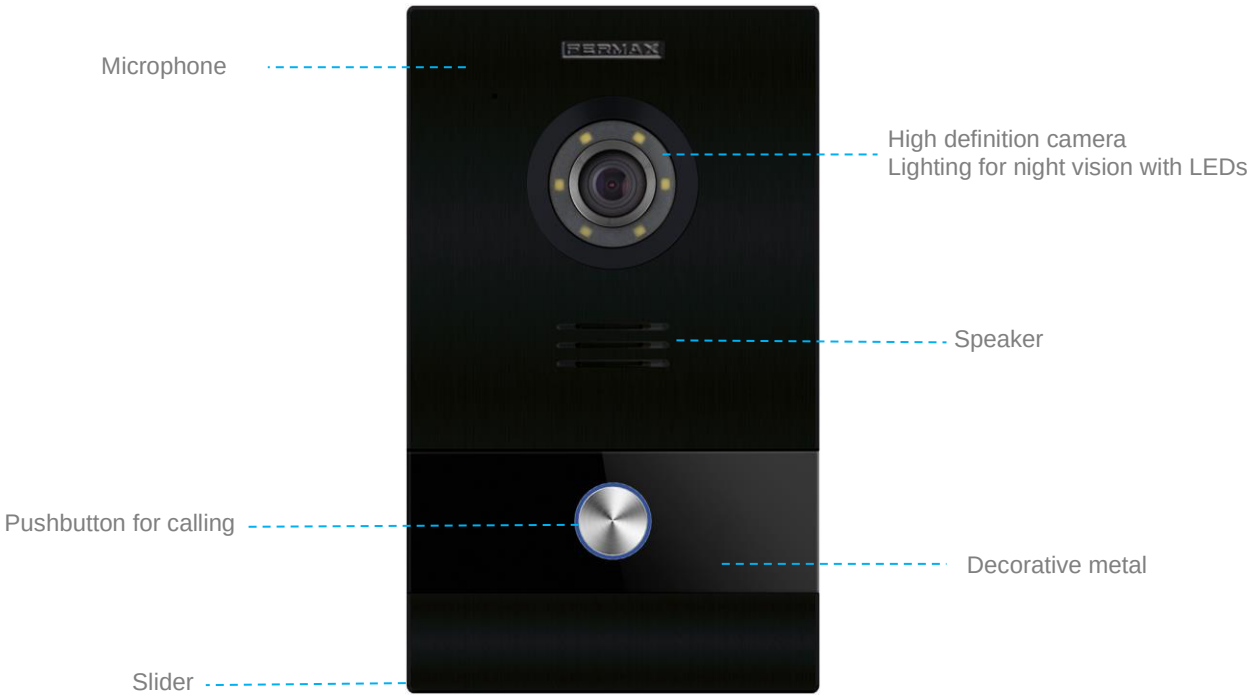

1/W VIDEO MILO PANEL BLACK is presented in one version without proximity reader. For integrated prox reader, refer to MILO 1W panel grey color ref.9534. Not compatible with Lift Control function

FEATURES

- Aluminum Profile
- High Resistance Tempered Glass
- High Definition Color Camera
- Low Power Consumption
- Wide Range Working Environment
- SIP compatible
- Linux Modular Structure
- Available In 10 Languages
- Remote Firmware Update
- Tags for identification in called devices

FUNCTIONS

CALL TENANT

Visitors are able to call the desired tenant from 1L panel. Alternatively, it can be configured to call one guard unit acting as an emergency call panel.

REFERENCES

Ref. 953303 1/W VIDEO MILO PANEL BLACK
Ref. 9543 MILO PANEL FLUSH BOX – S
Ref. 9518 MILO SURFACE BOX-S (stainless steel grey color)

TECHNICAL SPECIFICATIONS

System:
- CPU: ARM Cortex-A7 1.2GHz
- FLASH: 128M
- SDRAM: 64M

Audio Features:
- G.711 protocol
- Audio level 17.7 dB

Camera:
- 1/3” CMOS Color
- 120º visual angle. 52º (V), 100º (H)
- 1 Mega Pixels
- Minimum illumination 0.5 LUX
- AWB

LED:
- White LED
- LM 60 mA Min. 24, Typ. 26
- View Angle 2θ1/2: 120

Power Consumption:
- On standby: 125mA
- Working: 250mA

Working voltage:
- 12 VDC

Connectivity:
- Ethernet RJ-45 Connector
- Exit button and door sensor connection
- NO, C, NC: Door lock release connection
- Built in web server for configuration and remote management

Working Environment:
- Temperature: -40 ºC – 70 ºC
- Humidity: 20 – 80% (Non-condensing)
- IP 54

DIMENSIONS (mm)

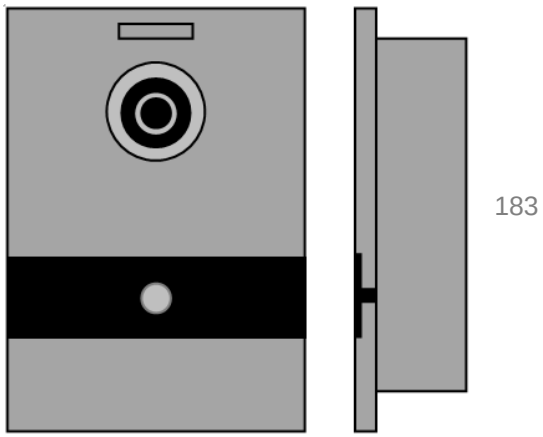

1L PANEL

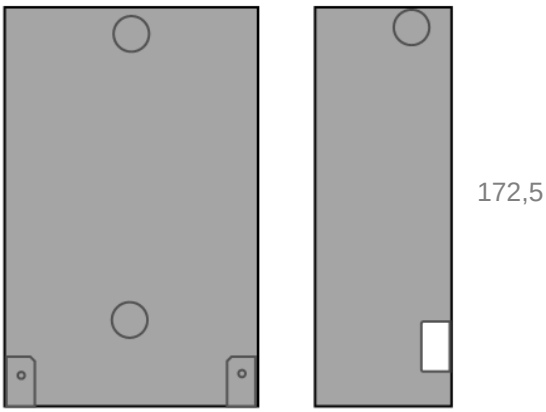

FLUSH BOX

NOTE: There must be a gap of at least 22 mm between the panel’s borders and the wall or any obstacle.

CONNECTIONS

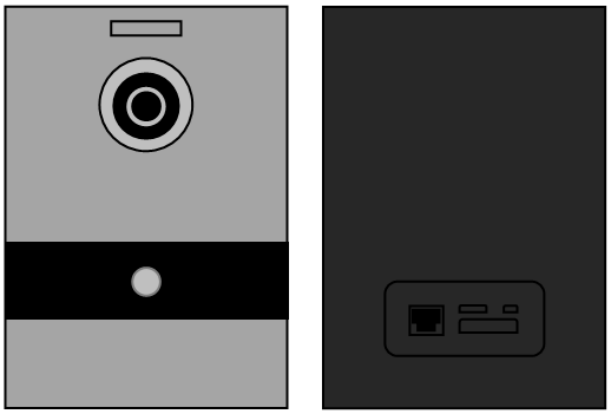

RJ-45 10/100 Base -T Ethernet
+, -, : 12 Vdc power supply input
BS, -, NA, SP: Exit button and door sensor connection
NO, C, NC: Door lock release connection
485+, 485-: RS485 serial port for spare