


Product data sheet



Smart Control 18.5"

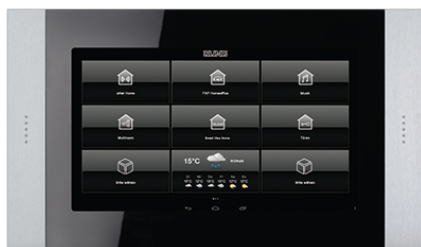

Reference number

SC 19

Smart Control 18.5"

aspect ratio 16:9

for installation in walls, capacitive touch screen
fanless, without rotating parts

- Door call function only in combination with Siedle Smart Gateway SG 650-.. or SG 150-..
- KNX visualisation in combination with Visu Pro Server (ref.-no.: JVP-SERVER-H)
- KNX visualization in combination with Smart Visu Server (ref.-no.: SV-SERVER-INT)
- Pre-installed iHaus-Server-App; iHaus-KNX connection via IP router (ref.-no.: IPR 200 REG) or IP interface (ref.-no.: IPS 200 REG)
- Pre-installed weather page

Update firmware prior to commissioning.

Please check Release Notes.

Accessories:

Flush-mounted recessed box ref.-no.: SC 19 EBG

Power supply ref.-no.: NT 2415 REG VDC

Technical data

Screen size (W x H):	410 x 230 mm
Screen diagonal:	470 mm / 18.5"
Resolution:	WXGA (1366 x 768), LED backlight display
Frame dimensions (W x H):	600 x 345 mm
Power consumption:	max. 30 W
Power supply:	DC 12 ... 32 V via external power supply (ref.-no. NT 2415 REG VDC, not included)
Operating system:	Android 5.0.2
Processor:	Cortex-A9
Main memory:	2 GB
Mass storage:	8 GB Flash (available disc space depends on operating system)
Slot of memory card:	microSD
Loudspeaker:	integrated
Microphone:	integrated
USB ports:	2 x USB 2.0 1 x Mini-USB OTG (accessible from the front)
LAN connections:	1 x 10/100 Mbit/s
Ambient temperature:	0 ... +30 °C

Version:

47 cm – 18.5"