

Product data sheet

Standard automatic switch 2.2 m



Reference number

ES 3281

KNX automatic switch 2.2 m

Standard

for bus coupling unit 3 ref.-no.: 2073 U

Protection level IP 44 is ensured with sealing kit ref.-no. AS CD 50 DS and "IP 44 frame" of the respective design range.

IP 44 suitable only for indoor installation

ETS product family: Physical sensors

Product type: Movement

Intended use

- Requirement-oriented control of lighting and other electrical loads
- Mounting on bus coupling unit 3 (ref.-no.: 2073 U)

Product characteristics

- Automatic switching of lighting depending on the thermal movement and ambient brightness
- 2 PIR sensors
- Detection range 180°
- Integrated brightness sensor
- Switch-off brightness can be set
- Output functions: Switching, staircase function, switching with forced position, value transmitter, light scene extension, operating mode setting for room temperature controller
- Extension of the detection area by way of operating several devices as main unit or extension unit
- Sensitivity can be set manually
- Status LEDs
- Manual switching on the device

Technical data

Colour	stainless steel (lacquered)
Range	LS range
Material:	thermoplastic lacquered
Version	Standard
Mounting height:	1.10 / 2.20 m


metal versions

Colour:

stainless steel (lacquered)

Material:

thermoplastic lacquered

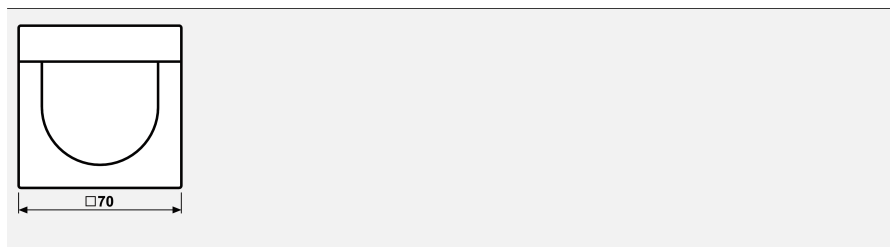

IP Protection level IP 44 is ensured with sealing kit ref.-no. AS CD 50 DS and "IP 44 frame" of the respective design range.