


# Product data sheet

## KNX push-button universal 2-gang

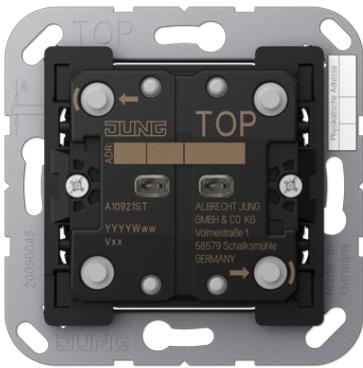

### Reference number

A 10921 ST

### KNX push-button universal 2-gang

Project design and commissioning with ETS5 or a more recent version.

ETS product family: Push-button

Product type: 2-gang push-button

The device is compatible with KNX Data Secure. KNX Data Secure offers protection against manipulation in building automation. A dedicated application is required for secure operation. Additional information is available at: KNX Secure

### Intended use

- Operation of loads, e.g. light on/off, dimming, blinds up/down, brightness values, temperatures, calling up and saving light scenes, etc.
- Installation in flush box according to DIN 49073

### Product characteristics

- KNX medium: TP 256
- Operating concept (rocker or button) adjustable for each operating area
- Button evaluation (single- or dual-area operation) adjustable
- One or two functions per operating area
- Integrated bus coupling unit
- Alarm function, optional acknowledge by pressing any button
- Disabling function: Disabling or change function mode of single or all button functions
- Status LED brightness adjustable
- Measurement of room temperature
- Connection of a push-button extension possible
- Connection of installation buttons or reed contacts possible
- KNX Data Secure compatible with ETS 5.7.3 or higher