

MDT Binary Inputs 4/8/16-fold, MDRC

Version		
BE-04000.01	Binary Input 4-fold	2SU MDRC, Inputs for floating contacts
BE-04024.01	Binary Input 4-fold	2SU MDRC, Inputs 24VAC/DC
BE-04230.01	Binary Input 4-fold	2SU MDRC, Inputs 230VAC
BE-08000.01	Binary Input 8-fold	4SU MDRC, Inputs for floating contac
BE-08024.01	Binary Input 8-fold	4SU MDRC, Inputs 24VAC/DC
BE-08230.01	Binary Input 8-fold	4SU MDRC, Inputs 230VAC
BE-16000.01	Binary Input 16-fold	8SU MDRC, Inputs for floating contacts
BE-16024.01	Binary Input 16-fold	8SU MDRC, Inputs 24VAC/DC
BE-16230.01	Binary Input 16-fold	8SU MDRC, Inputs 230VAC

The MDT Binary Input is available in 3 versions, input detection of 24VAC/DC signals, input detection of 230VAC signals and reading out of floating contacts. The Binary Input reacts depending on its programmed parameters and sends a telegram on the KNX bus. You can connect conventional push-buttons or auxiliary contacts (e.g. door and window contacts) to the device.

The MDT Binary Inputs include four integrated logical modules to implement logical operations and logical control. These logical modules interpret all the inputs plus two external objects. So you can easily create KNX/EIB telegrams which are required in daily practice (e.g. fault telegrams or „all windows closed“).

Each Input is parameterized individually via ETS3f/4. The device provides extensive functions like switching of lighting, operation of blinds and shutters, counting of pulses, debounce time, contact type and telegram rate limitation. The command for rising and falling edge can be defined independently and with the block communication object each channel can be blocked or released. The sending of an second object is possible by the logical modules.


The MDT Binary Input is a modular installation device for fixed installations in dry rooms. It fits on DIN 35mm rails in power distribution boards or closed compact boxes.

For project design and commissioning of the MDT Binary Input it is recommended to use the ETS3f/ETS4 or later. Please download the application software at www.mdt.de/Downloads.html


BE-04000.01



BE-08000.01




BE-16000.01

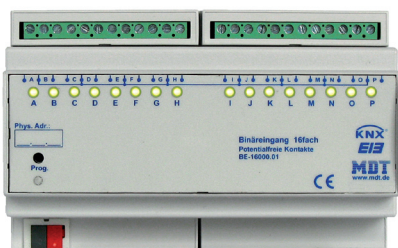


- Production in Germany, certified according to ISO 9001
- LED indicator for each channel
- To connect conventional push buttons or window/auxiliary contacts
- **4 integrated logical modules**, e.g. Interpretation of the inputs (e.g. window closed or sending of an second object)
- Telegram rate limitation
- NO or NC contact operation, sending of contact state
- Operation of blinds and shutters, 1 and 2 button operation
- Forced setting function for each output
- Scenes
- Block communication object for each channel
- Common object via logical modules
- Operation with short/long button push and 2 objects
- Counting of pulses, suitable for 30ms S0 pulses
- Cyclical sending, sending after reset
- Internal contact voltage 12V
- Modular installation device for DIN 35mm rails
- Integrated bus coupling unit
- 3 years warranty

Technical Data	BE-04000.01 BE-08000.01 BE-16000.01	BE-04230.01 BE-08230.01 BE-16230.01	BE-04230.01 BE-08024.01 BE-16024.01
Number of inputs	4/8/16	4/8/16	4/8/16
Signal voltage	For floating contacts	230VAC	12-24VDC / 24VAC
Internal contact voltage	12V	--	--
Permitted input cable length	100m	100m	100m
Permitted wire gauge			
Screw terminal	0,5 - 4,0mm ² solid core 0,5 - 2,5mm ² finely stranded	0,5 - 4,0mm ² solid core 0,5 - 2,5mm ² finely stranded	0,5 - 4,0mm ² solid core 0,5 - 2,5mm ² finely stranded
KNX busconnection terminal	0,8mm Ø, solid core	0,8mm Ø, solid core	0,8mm Ø, solid core
Power Supply	KNX bus	KNX bus	KNX bus
Power consumption KNX bus typ.	<0,3W	<0,3W	<0,3W
Operation temperature range	0 bis + 45°C	0 bis + 45°C	0 bis + 45°C
Enclosure	IP 20	IP 20	IP 20
Dimensions MDRC (Space Units)	2/4/8SU	2/4/8SU	2/4/8SU

Exemplary circuit diagram BE-08000.01

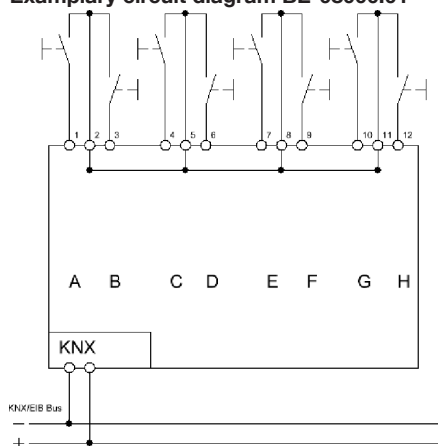

Exemplary circuit diagram BE-08024.01

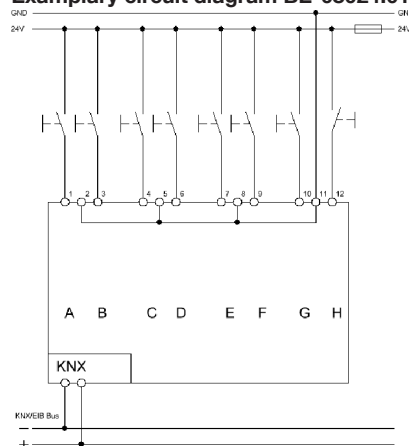

Exemplary circuit diagram BE-08230.01

