


# Product datasheet

Specifications



## Pushbutton Interface Pro, SpaceLogic KNX, secure, 8 channel, white

MTN6002-0108S

EAN Code: 3606487137443

### Main

Range	SpaceLogic KNX
Product or component type	Push-button interface
Device presentation	Complete product
Bus type	KNX
Colour tint	White
Main colour tint	White
Output type	Digital output
Power supply input current	18 mA

### Complementary

Device mounting	Flush
Number of channels	8
Offer type	Pro
Control type	Push-button
Surface finish	Glossy
surface treatment	Untreated
Operating mode	KNX bus system
IP degree of protection	IP20
Width	43.5 mm
Height	35.5 mm
Depth	15.4 mm
Cable length	30 m
Number of inputs	4
Input type	Digital input Universal input

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.400 cm
Package 1 Width	7.500 cm
Package 1 Length	7.500 cm

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications



Package 1 Weight	71.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	50
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	3.874 kg

## Contractual warranty

Warranty (in months)	18
----------------------	----





## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

Total lifecycle Carbon footprint	93 kg CO2 eq.
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Carbon footprint of the manufacturing phase [A1 to A3]	41 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.1 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.1 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	51 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.1 kg CO2 eq.

## Use Better



### Materials and Substances

Packaging made with recycled cardboard	No
Packaging without single use plastic	No
<a href="#">EU RoHS Directive</a>	Compliant with Exemptions
SCIP Number	742aa773-90f8-499c-9f60-f02cbbc0de1e
REACH Regulation	<a href="#">REACH Declaration</a>
Halogen-free status	Halogen free product
PVC free	Yes

## Use Longer




### Lifetime extension

Repair	No
--------	----

## Use Again




### Repack and remanufacture

End of life manual availability	<a href="#">End of Life Information</a>
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins



Offer Marketing Illustration

Product benefits / Features

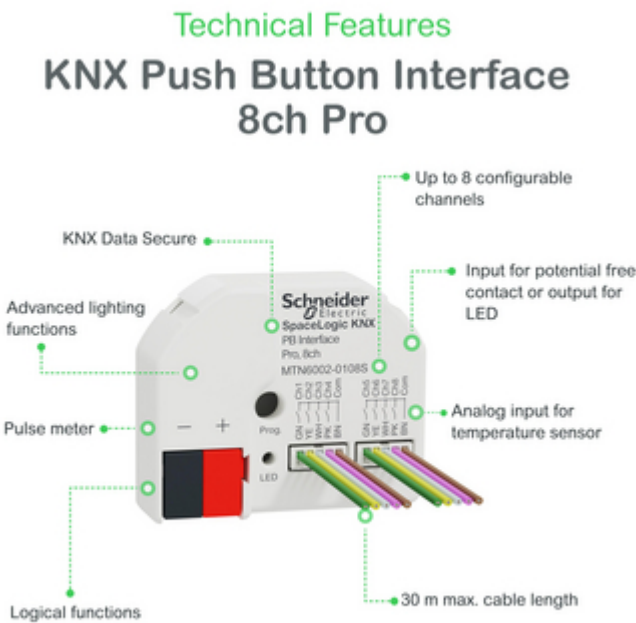



Offer Marketing Illustration

Product benefits / Features

### Technical Benefits

## KNX Push Button Interface 8ch Pro



Versatile with multi  
operating functions



Flexible with up to 8  
configurable channels



KNX Data Secure  
device



Up to date with DFU  
tool



Sustainable



Adjustable white and  
color light control





Image of product / Alternate images

Alternative

---

