

Motion detector M34HC, KNX, high ceiling, 15-20 m, 360°, for flush-mounting box, black

350-34014


4 year warranty

This motion detector for high ceiling with 5 channels is suitable for KNX systems. It can be installed in a flush-mounting box. Spring clips for flush-mounting and a surface-mounting box can be ordered separately. In conformity with the European directive for EMC and safety EN 60669-2-1.

- Installation height up to 10 m
- Plug-in terminals for fast installation
- Easy configuration (well-structured ETS file)
- 5 channels
- Various applications: presence, lux, constant light switch, HVAC, alarm
- IP20
- For flush-mounting box, flush or surface mounting via accessories



Detection range



H	A Walking	B Across	C Towards
4 m	ø 15 m	ø 16 m	ø 8 m
7 m	ø 20 m	ø 18 m	ø 10 m
10 m	ø 20 m	ø 20 m	ø 12 m

Measured according to EN/IEC63180



KNX



KNX



master/
secondary



360 °



ø 20 m from
a height of
10 m



4 – 10 m



flush-
mounting
box

niko


Technical data

Article number	350-34014
Configuration	master/secondary
Input voltage	30 Vdc via KNX-bus
Detector output	KNX
Maximum power consumption	0.3 W
Maximum current consumption	10 mA
Light intensity range	10 lux – 2000 lux
Number of channels	5 channels
Switch-off delay	1 s – 18 h 12 min 15 s
Detection angle	360 °
Detection range (PIR)	ø 20 m from a height of 10 m
Ambient temperature	-20 – +50 °C
Mounting method	flush-mounting box
Mounting height	4 – 10 m
Drill diameter	56 mm
Minimum flush-mounting depth	57 mm
Colour	black (approximately RAL 9011)
Dimensions visible (HxWxD)	102 x 102 x 33 mm
Dimensions (HxWxD)	102 x 102 x 51 mm
Wire capacity	ø 0.8 mm
Protection degree	IP20
Impact resistance	IK02
Modification of settings	ETS software
Marking	CE

Accessories

390-34114	Surface-mounting box for M34HC, black
390-34203	Flush-mounting box with spring clips for M34LR/M34HC

Dimensions

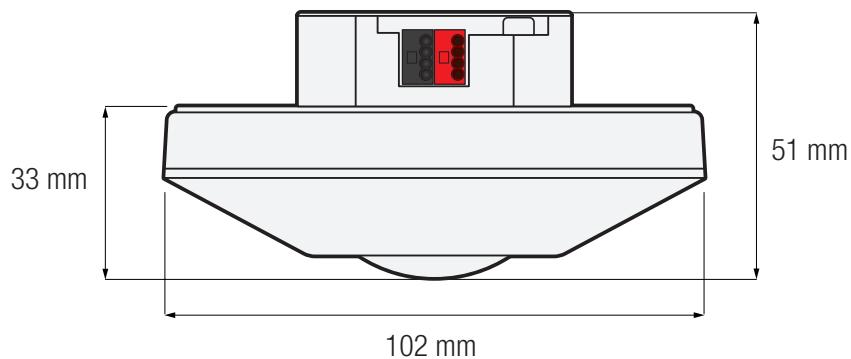

Wiring diagram

