

DALI push-button interface

350-70020

4 year warranty

Push-button interface for control of DALI buses. Push-button interface transforms the switch impulse of external push buttons (e.g. fourfold push button) into a DALI command. You can easily mount the compact interface in the flush-mounting box behind a potential-free push button. You can connect 4 push buttons to this interface. Depending on the setting, you can switch a selected light group on or off with every push button (with a brief press) or dim it (by holding down), or activate a light scene (pressing briefly). Suitable for all DALI addressable Niko detectors (350-41750, 350-41751, 350-41760, 350-41761, 350-41780 and 350-41781).

- Push button interface that converts the switching pulse of outside push buttons (e.g. fourfold push button) into a DALI control.
- This compact interface can be easily mounted into the flush-mounting box behind a potential-free push button.
- It is possible to connect four push buttons to this interface. Depending on the programming, each push button makes it possible to either turn a group of lamps on and off (via brief pressure) and dim the intensity (press and hold) or enable a light scene of your choice (press briefly).
- Suitable for all Niko addressable DALI detectors (350-41750, 350-41751, 350-41760, 350-41761, 350-41780 and 350-41781).

Technical data


DALI push-button interface.

- Ambient temperature: -5 – +40 °C
- Usage: for indoor use only
- Dimensions (HxWxD): 35 x 30 x 30 mm
- Marking: CE
- Certification marks: SundaHus, Byggvarubedömningen

CE



Dimensions

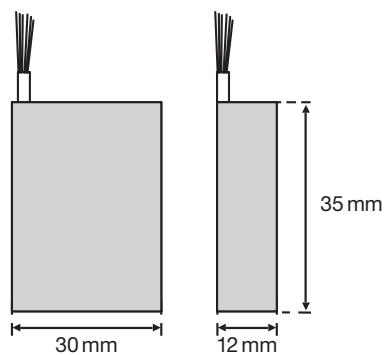

Wiring diagram

