

Presence detector, 230 V, secondary, 14 m, round, for flush-mounting box, white

351-25459

4 year warranty

The presence or absence detector for flush mounting in ceilings is suitable for switching the indoor lighting on and off. Automatic on/off (presence detector) or manual on/automatic off (absence detector). The detection area can be divided by means of an adjustable cover mask. Use exclusively in combination with a master.

Finishing colour: white


Compatible master detectors: 351-25451, 351-25457, 351-25463, 351-25467, 351-25475, 351-26001, 351-26002, 351-26003, 351-26004

- Low consumption (0.25 W)
- Surface-mounting boxes available separately

Presence detector for the stairwell, cellar, small meeting rooms, etc.



Detection range



H	A Across	B Towards	C Presence
2 m	ø 10 m	ø 5 m	ø 4 m
2.5 m	ø 12 m	ø 6 m	ø 5 m
3 m	ø 14 m	ø 7 m	ø 6 m
3.5 m	ø 16 m	ø 8 m	ø 7 m
4 m	ø 16 m	ø 8 m	ø (8) m
5 m	ø 16 m	ø 8 m	ø (8) m
6 m	ø 16 m	ø 8 m	ø (8) m

230 V | secondary | 360 ° | ø 14 m from a height of 3 m | 2 – 6 m | flush-mounting box

niko


Technical data

Article number	351-25459
Compatible master detectors	351-25451, 351-25457, 351-25463, 351-25467, 351-25475, 351-26001, 351-26002, 351-26003, 351-26004
Input voltage	230 Vac ± 10 %, 50 Hz
Detector output	230 V (ON/OFF)
Maximum MCB rating	10 A (limited by national installation rules)
Detection angle	360 °
Detection range (PIR)	ø 14 m from a height of 3 m
Ambient temperature	-20 – +40 °C
Mounting method	flush-mounting box
Mounting height	2 – 6 m
Drill diameter	48 mm
Dimensions visible (HxWxD)	105 x 105 x 35 mm
Dimensions (HxWxD)	105 x 105 x 71 mm
Protection degree	IP20
Marking	CE

Accessories

351-25420 Surface-mounting box, white
351-25330 Deco ring, white

Dimensions

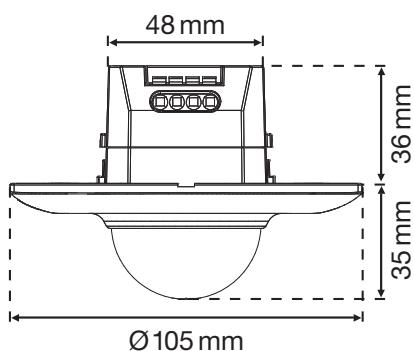

Wiring diagram

