

20 A1 Actuator-BCU Shutter 902202**Use of the application program**

Product family: Input/output

Product type: Binary/binary

Manufacturer: Siemens

Name: Shutter switch UP 520/01

Order no.: 5WG1 520-2AB01

Functional description

With the application program "20 A1 Actuator-BCU Shutter 902202", it is possible to use the output of the shutter switch for controlling a shutter, roller blind or skylight. The following functions can be assigned to the 2-fold push button DELTA fläche/studio that is connected to its physical external interface: switching (on/off/toggle/value), dimming (on/off or brighter/darker), controlling shutters, skylights and security gates etc., recalling/programming scenes and status display via LEDs.

Functions of the rockers**Switching**

A separate communication object is available for each rocker contact (upper/lower) of the two rockers. It is therefore possible to switch up to four different groups of luminaires. It is possible to set via parameters which switch function (on/off/toggle) is carried out when the rocker is pressed or released. An 8-bit value can also be assigned to each rocker contact. The corresponding value is sent immediately once the rocker has been pressed. It is therefore possible for a dimming actuator for example to be set to a defined value. A "bell function" is also possible. The On/Off signal is sent when the rocker is pressed and the inverse signal is sent when the rocker is released.

Dimming

A distinction is made between a short and long push button action. A short push button action sends a corresponding switching command (on or off). If the push button is pressed and held down for a longer period (the duration of which can be set), a dimming command is sent. The functions of "Dimming with stop telegram" and "Dimming with cyclical sending" are available. If "Dimming with stop telegram" is selected, a long push button action sends a command to the dimming object to dim by 100%. When the rocker is released, a stop command is sent. If "Dimming with cyclical sending" is selected, a dimming command is sent at set intervals for the duration of the push button action. It is also possible to assign parameters to the adjustment of the brightness value per dimming command (e.g. adjust by 1/8).

Shutter control

A distinction is made between a short and long push button action. If the rocker is pressed briefly, a switching telegram is sent which adjusts the louvres or stops any shutter movement. After a long push button action, the shutters are either raised or lowered. When assigning parameters, it is possible to choose between "Upper contact: Up, Lower contact: Down" or vice versa. Skylights and security gates for example can be controlled in both directions using this parameter. In this case the Up command corresponds to the Off command and the Down command corresponds to the On command.

Scene

Using the "Scene" function, users are able to reprogram a scene module themselves without changing the project design in ETS i.e. they can assign other brightness values or switching states to the individual groups of the respective scene. Two scenes can be recalled by pressing the rocker briefly (e.g. upper contact: scene 1, lower contact: scene 2) while a long rocker operation is used to program them. The scene is recalled via a 1 bit switching command, whereby scene 1 is recalled with a "0" telegram and scene 2 is recalled with a "1" telegram. It is possible to specify in the parameters which telegrams are sent by the upper and lower rocker contacts. The scene is saved via a 1 bit switching command, whereby scene 1 is saved with a "0" telegram and scene 2 is saved with a "1" telegram. An application with this type of function must also be used in the scene module. The application programs "12 C0 Scene 740701" and "12 C0 Scene 740801" are available. Before programming a scene, the actuators concerned must be set to the required brightness values or switching states using the sensors provided. The scene modules that have been addressed are requested on receipt of a telegram to scan the current brightness values and switching states of the actuators and to store them in the corresponding scene. A long rocker operation is indicated by the LED lighting up. It is possible to specify the period that distinguishes a short and long push button action.

LED

Two communication objects are available for the two LEDs of the push button. They can be used either to display the switching states or as an orientation light if the corresponding parameters have been selected.

20 A1 Actuator-BCU Shutter 902202

Functions of the shutter output

Shutter (Roller blind), Up/Down

When the "Up/Down" object receives a telegram, the shutter is moved in the required direction for a set period. The shutter is raised if the object value is "0" and lowered if the object value is "1". The shutter or roller blind can also be controlled via a dimming object. In this setting, the shutter (roller blind) and louvre objects are inverted to achieve a synchronisation with the push buttons that are being used. The relays are automatically opened once the set period for shutter or roller blind movement has elapsed. If the shutter (roller blind) is already travelling in a certain direction and "Up/Down" telegrams are received to move the shutter in the opposite direction, the shutter (blind) first stops for a set interval before it changes direction. This "Pause on change in direction" depends on the shutter motor that is being used and information should be obtained from the manufacturer. When the shutter is lowered, it is completely closed. For this reason, it is possible to set a period ("Delay time on a direction change") which causes the shutter motor to move in another direction and thus leads to louvre adjustment. This is also the case if the lowering of the shutter is interrupted by a stop telegram. The time set for the "Pause on change in direction" is observed.

Louvres, Open/Closed

The behaviour of the shutter on receipt of a telegram for louvre adjustment depends on the current status of the shutter. If the shutter is travelling in a specific direction, the shutter movement is stopped. In the case of a roller blind, the receipt of a louvre adjustment telegram functions like a stop telegram. If the roller blind is stationary, it has no effect. During louvre adjustment, if another telegram is received to rotate the louvres in the same direction, the adjustment period is extended. If however a telegram is received to rotate the louvres in the opposite direction, the command is carried out once the pause on change in direction has been observed. If the shutter is stationary, a louvre adjustment telegram leads to shutter movement in the required direction. Once the set period for movement has elapsed (normally 150 ms to 200 ms), the shutter motor is automatically switched off. If a shutter is lowered (without reverse step), the louvres remain closed in this direction. If the shutter is stopped and then raised step by step (louvre adjustment), the louvres are opened first of all and then rotated upwards again. If the louvres are completely closed, further telegrams to rotate the louvres in the same direction cause the shutters to be moved step by step in this direction.

Safety object (wind alarm)

The safety function can be enabled or disabled. In the event of an alarm signal, a "1" is received by the safety object and the shutters are raised. The safety position of the roller blinds can be selected.

The safety object expects to receive cyclical telegrams from the signalling device (e.g. wind sensor) for monitoring purposes. Even if there is no alarm, the sensor must send telegrams with the value "0" (no alarm) at a set time interval (monitoring time). If the telegrams fail to appear, the shutters are also moved to the safety position. The object value of the safety object is thus set internally to "1" (alarm). The current alarm status can be read out via the safety object (if the safety function is enabled). If the safety position has been activated, the shutters/roller blinds can no longer be controlled via "Up/Down" or louvre adjustment telegrams. If the shutter or roller blind is moved to the safety position, thereby changing direction, the time set in the parameter "Pause on change in direction" is observed. The relays are not opened once the period for shutter or roller blind movement has elapsed. This guarantees that the shutter/roller blind reaches the safety position.

The shutter/roller blind can only be operated once the safety object receives a telegram with the value "0" (no alarm).

Bus voltage failure and recovery

The shutter or roller blind is switched off on bus voltage recovery. The shutter and roller blind can be moved up, moved down or stopped on bus voltage failure. In the event of a bus voltage failure, the pause on change in direction that is normally observed is not taken into account. This means for example that if a shutter is currently being lowered, it will change direction after approx. 20 ms. Shutter motors that require a pause are not able to carry out this change in direction. If the relay contacts were already opened before the bus voltage failure, the functionality is not taken into account. When operating heavy roller blind motors, the parameter setting "STOP" should be selected to protect the relay contacts.

Automatic opening of the relays

It is possible to prevent the relays from opening automatically (via the parameter "Function of louvres" in the "Shutter" parameter window). This deactivation takes effect if the relay has been closed for example by an "Open/Closed" telegram. Once a motor has been set in motion, it can then only be brought to a halt with a stop telegram (necessary for reverse circuits). For this reason, the louvre adjustment telegram is always interpreted as a stop telegram. This is also the case when the shutter is stationary (louvre adjustment telegrams no longer exist).

20 A1 Actuator-BCU Shutter 902202

⚠ WARNING

When using the shutter switch UP 520/01 for roller blind drive mechanisms, the following should be noted when assigning parameters:

- (It can otherwise lead to welding of the contacts.)
- The parameter "Pause on change in direction" must be set to the time given by the manufacturer of the shutter (generally longer than 500 ms).
 - The parameter "Behaviour on bus voltage failure" should be set to "STOP".

Assigning parameters to the rockers

Switch

Communication objects

Phys.Addr.		Program		
no.	Object name	Function	Type	
01.01.008	20 A1 Actuator-BCU Shutter 902202			
0	Switch, Rocker A (upper rocker contact) On	1 Bit		
1	Switch, Rocker A (lower rocker contact) Off	1 Bit		
2	Switch, Rocker B (upper rocker contact) On	1 Bit		
3	Switch, Rocker B (lower rocker contact) Off	1 Bit		
...		

Obj	Object name	Function	Type	Flag
0	Switch, Rocker A (upper rocker contact)	On	1 Bit	CT
1	Switch, Rocker A (lower rocker contact)	Off	1 Bit	CT
2	Switch, Rocker B (upper rocker contact)	On	1 Bit	CT
3	Switch, Rocker B (lower rocker contact)	Off	1 Bit	CT

The switching telegrams of rocker A are sent via the group addresses in this object. It is possible to set via parameters which switching state is generated when the rocker is pressed or released. If "Toggle" is selected, the central addresses that are also contained in the actuator must be entered in order to synchronise the sensor.

The switching telegrams of rocker B are sent via the group addresses in this object. It is possible to set via parameters which switching state is generated when the rocker is pressed or released. If "Toggle" is selected, the central addresses that are also contained in the actuator must be entered in order to synchronise the sensor.

Parameters

LED	Rocker A	Rocker B	Shutter
Function of left rocker	Switch		
Upper contact	On		
Lower contact	Off		

The function and parameters of parameter windows "Rocker A" and "Rocker B" are identical.

Parameters	Settings
Function of left rocker	Switch Shutter Dimming with stop telegram Dimming with cyclical sending Scene (recall / program)
Upper contact	Off On Toggle 8-bit Value press: On, release: Off press: Off, release: On
Lower contact	Off On Toggle 8-bit Value press: On, release: Off press: Off, release: On

This parameter determines which switching value is sent via the corresponding switching object when the upper and lower rocker contacts are pressed or released.

"On" or "Off": An On or Off telegram is sent when the contact is pressed. There is no evaluation when the rocker is released.

"Toggle": The value in the switching object is inverted when the contact is pressed. There is no evaluation when the rocker is released.

"8-bit Value": An adjustable 8-bit value is sent when the contact is pressed. When this setting is selected, an additional parameter is displayed where the value can be defined.

"press: On, release: Off": An On telegram is generated when the contact is pressed while releasing the contact produces an Off telegram.

"press: Off, release: On": An Off telegram is generated when the contact is pressed while releasing the contact produces an On telegram.

20 A1 Actuator-BCU Shutter 902202

Dimming with stop telegram

Communication objects

Phys.Addr.		Program		
no.	Object name	Function	Type	
01.01.008	20 A1 Actuator-BCU Shutter 902202			
0	Dimming On / Off, Rocker A	On / Off	1 Bit	
1	Dimming, Rocker A	Brighter / Darker	4 Bit	
2	Dimming On / Off, Rocker B	On / Off	1 Bit	
3	Dimming, Rocker B	Brighter / Darker	4 Bit	
...	

Obj	Object name	Function	Type	Flag
0	Dimming On / Off, Rocker A	On / Off	1 Bit	CT
The switching telegrams of rocker A are sent via the group addresses in this object. It is possible to set via parameters which switching state is generated when the rocker is pressed or released. If "Toggle" is selected, the central addresses that are also contained in the actuator must be entered in order to synchronise the sensor.				
1	Dimming, Rocker A	Brighter / Darker	4 Bit	CT
This object serves as a dimming object for rocker A and sends a dimming telegram after a long push button action. It is possible to set via parameters which dimming telegrams are generated when the upper or lower rocker contact is pressed.				
2	Dimming On / Off, Rocker B	On / Off	1 Bit	CT
The switching telegrams of rocker B are sent via the group addresses in this object.				
3	Dimming, Rocker B	Brighter / Darker	4 Bit	CT
This object serves as a dimming object for rocker B and sends a dimming telegram after a long push button action.				

Parameters

LED	Rocker A	Rocker B	Shutter	
Function of left rocker	Dimming with stop telegram			
Upper / Lower contact	On / Off			
Long switch operation min.	0.5 seconds			

The function and parameters of parameter windows "Rocker A" and "Rocker B" are identical.

Parameters		Settings	
Function of left rocker		Switch Shutter Dimming with stop telegram Dimming with cyclical sending Scene (recall / program)	
The function of the rocker is set via this parameter. The "Rocker A" parameter window changes depending on the function that is selected here and the relevant parameters are displayed with default settings.			
Upper / Lower contact		On / Off Toggle / Toggle	
This parameter determines which switching value is sent via the object when the upper and lower rocker contacts are pressed briefly.			
"On / Off": Pressing the upper contact generates an On telegram while an Off telegram is sent when the lower contact is pressed.			
"Toggle / Toggle": The value in the switching object is inverted when either contact is pressed.			
Long switch operation min.		0.3; 0.4; 0.5 ; 0.6; 0.8; 1.0; 1.2; 1.5; 2.0; 2.5; 3.0; 4.0; 5.0; 6.0; 7.0 seconds	
This parameter defines the time limit for a short/long rocker operation. If a rocker is pressed for longer than the set period, the push button detects a long rocker operation and sends dimming telegrams.			

Dimming with cyclical sending

Communication objects

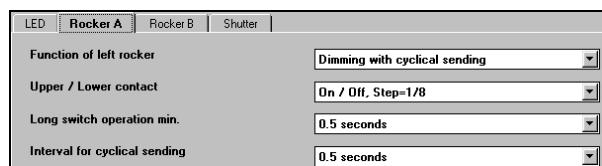
Phys.Addr.		Program		
no.	Object name	Function	Type	
01.01.008	20 A1 Actuator-BCU Shutter 902202			
0	Dimming On / Off / Toggle, Rocker A	On / Off / Toggle	1 Bit	
1	Dimming, Rocker A	Brighter / Darker	4 Bit	
2	Dimming On / Off / Toggle, Rocker B	On / Off / Toggle	1 Bit	
3	Dimming, Rocker B	Brighter / Darker	4 Bit	
...	

Obj	Object name	Function	Type	Flag
0	Dimming On / Off / Toggle, Rocker A	On / Off / Toggle	1 Bit	CWT
The switching telegrams of rocker A are sent via the group addresses in this object. It is possible to set via parameters which switching state is generated when the rocker is pressed or released. If "Toggle" is selected, the central addresses that are also contained in the actuator must be entered in order to synchronise the sensor.				
1	Dimming, Rocker A	Brighter / Darker	4 Bit	CT
This object serves as a dimming object for rocker A and sends a dimming telegram after a long push button action. It is possible to set via parameters which dimming telegrams are generated when the upper or lower rocker contact is pressed.				

20 A1 Actuator-BCU Shutter 902202

Obj	Object name	Function	Type	Flag
2	Dimming On / Off / Toggle, Rocker B	On / Off / Toggle	1 Bit	CWT
The switching telegrams of rocker B are sent via the group addresses in this object.				
3	Dimming, Rocker B	Brighter / Darker	4 Bit	CT
This object serves as a dimming object for rocker B and sends a dimming telegram after a long push button action.				

Parameters



The function and parameters of parameter windows "Rocker A" and "Rocker B" are identical.

Parameters	Settings
Function of left rocker	Switch Shutter Dimming with stop telegram Dimming with cyclical sending Scene (recall / program)
The function of the rocker is set via this parameter. The "Rocker A" parameter window changes depending on the function that is selected here and the relevant parameters are displayed with default settings.	
Upper / Lower contact	On / Off, Step = 1/1 On / Off, Step = 1/2 On / Off, Step = 1/4 On / Off, Step = 1/8 On / Off, Step = 1/16 On / Off, Step = 1/32 On / Off, Step = 1/64 Toggle / Toggle, adjustment = 1/1 Toggle / Toggle, adjustment = 1/4 Toggle / Toggle, adjustment = 1/8 Toggle / Toggle, adjustment = 1/16 Toggle / Toggle, adjustment = 1/32 Toggle / Toggle, adjustment = 1/64
This parameter determines which switching value is sent when the upper and lower contacts are pressed briefly. The change in the brightness value that is carried out by a dimming telegram when a long push button action is detected is also set here.	

Parameters	Settings
In the default setting "Step = 1/8" for example, 8 dimming telegrams have to be sent in order to dim from 0% to 100%.	
"On / Off, Step = x": A short operation of the upper contact generates an On telegram while an Off telegram is sent after the lower contact is pressed briefly. "Dim brighter" telegrams are sent if the upper contact is pressed for a long period while "Dim darker" telegrams are sent if the lower contact is pressed.	
"Toggle / Toggle, adjustment = x": The value in the switching object is inverted after a short push button action. The dimming function remains the same as for the setting "On / Off, Step = x".	
Long switch operation min.	0.3; 0.4; 0.5 ; 0.6; 0.8; 1.0; 1.2; 1.5; 2.0; 2.5; 3.0; 4.0; 5.0; 6.0; 7.0 seconds
This parameter defines the time limit for a short/long rocker operation. If a rocker is pressed for longer than the set period, the push button detects a long rocker operation and sends dimming telegrams.	
Interval for cyclical sending	0.3; 0.4; 0.5 ; 0.6; 0.8; 1.0; 1.2; 1.5; 2.0; 2.5; 3.0; 4.0; 5.0; 6.0; 7.0 seconds
The repetition rate for cyclical sending after a long push button action is set here. The busload should be taken into consideration when setting this interval.	

Shutter

Communication objects

Phys.Addr.	Program			Type
	no.	Object name	Function	
01.01.008	20 A1 Actuator-BCU Shutter 902202			
0	Louvres, Rocker A	Open / Closed	1 Bit	
1	Shutter, Rocker A	Up / Down	1 Bit	
2	Louvres, Rocker B	Open / Closed	1 Bit	
3	Shutter, Rocker B	Up / Down	1 Bit	
...

Obj	Object name	Function	Type	Flag
0	Louvres, Rocker A	Open / Closed	1 Bit	CT
This object sends a switching command for louvre adjustment when rocker A is pressed briefly. It is possible to set via parameters which switching command is generated when the rocker is pressed.				
1	Shutter, Rocker A	Up / Down	1 Bit	CT
This object sends a switching command to lower or raise the shutters when rocker A is pressed for a long period. It is possible to set via parameters which switching command is generated when the rocker is pressed.				

Application program description

October 2001

20 A1 Actuator-BCU Shutter 902202

Obj	Object name	Function	Type	Flag
2	Louvres, Rocker B	Open / Closed	1 Bit	CT
This object sends a switching command for louvre adjustment when rocker B is pressed briefly.				
3	Shutter, Rocker B	Up / Down	1 Bit	CT
This object sends a switching command to raise or lower the shutters when rocker B is pressed for a long period.				

Parameters

LED	Rocker A	Rocker B	Shutter
Function of left rocker	Shutter		
Upper / Lower contact	Up / Down		
Long switch operation min.	0.5 seconds		

The function and parameters of parameter windows "Rocker A" and "Rocker B" are identical.

Parameters	Settings
Function of left rocker	Switch Shutter Dimming with stop telegram Dimming with cyclical sending Scene (recall / program)
The function of the rocker is set via this parameter. The "Rocker A" parameter window changes depending on the function that is selected here and the relevant parameters are displayed with default settings.	
Upper / Lower contact	Up / Down Down / Up
This parameter defines the switching command for the upper and lower rocker contacts. In the default setting, a brief operation of the upper contact opens the louvres by a step via an Off telegram. Pressing the lower contact closes the louvres by a step with an On telegram. A long operation of the upper contact raises the shutter with an Off telegram while a long operation of the lower contact lowers the shutter with an On telegram.	
Long switch operation min.	0.3; 0.4; 0.5 ; 0.6; 0.8; 1.0; 1.2; 1.5; 2.0; 2.5; 3.0; 4.0; 5.0; 6.0; 7.0 seconds
This parameter defines the time limit for a short/long rocker operation. If a rocker is pressed for longer than the set period, the push button detects a long rocker operation.	

Scene

Communication objects

Phys.Addr.	Program			
	no.	Object name	Function	Type
01.01.008	20 A1 Actuator-BCU Shutter 902202			
0	Scene, Rocker A	Recall	1 Bit	
1	Scene, Rocker A	Save	1 Bit	
2	Scene, Rocker B	Recall	1 Bit	
3	Scene, Rocker B	Save	1 Bit	
***	***	***	***	***

Obj	Object name	Function	Type	Flag
0	Scene, Rocker A	Recall	1 Bit	CT
The telegrams for recalling scenes are sent via the group address in this object. On receipt of the telegram, the scene module sends the stored brightness values of the scene via the group objects to the switch/dim actuators that have been addressed.				
1	Scene, Rocker A	Save	1 Bit	CT
The programming telegrams are sent via the group address in this object to the corresponding scene module.				
2	Scene, Rocker B	Recall	1 Bit	CT
The telegrams for recalling scenes are sent via the group address in this object. On receipt of the telegram, the scene module sends the stored brightness values of the scene via the group objects to the switch/dim actuators that have been addressed.				
3	Scene, Rocker B	Save	1 Bit	CT
The programming telegrams are sent via the group address in this object to the corresponding scene module.				

Parameters

LED	Rocker A	Rocker B	Shutter
Function of left rocker	Scene (recall / program)		
Upper / Lower contact	0 / 1		
Start to save scene at	5.0 seconds		

The function and parameters of parameter windows "Rocker A" and "Rocker B" are identical.

20 A1 Actuator-BCU Shutter 902202

Parameters	Settings
Function of left rocker	Switch Shutter Dimming with stop telegram Dimming with cyclical sending Scene (recall / program)
	The function of the rocker is set via this parameter. The "Rocker A" parameter window changes depending on the function that is selected here and the relevant parameters are displayed with default settings.
Upper / Lower rocker	0 / 1 1 / 0
	This parameter defines the sending signal when the rocker contacts are pressed. "0 / 1": When the upper contact is pressed briefly, scene 1 is set with a "0" telegram by the scene modules that have been addressed. In the same way, scene 2 is set when the lower contact is pressed briefly. After a long push button action, these scene modules are requested on receipt of a telegram to scan the current brightness values and switching states of the actuators and to store them in the corresponding scene. "1 / 0": The assignment of scenes to the rocker contacts is inverted in this setting.
Start to save scene at	0.3; 0.4; 0.5; 0.6; 0.8; 1.0; 1.2; 1.5; 2.0; 2.5; 3.0; 4.0; 5.0 ; 6.0; 7.0 seconds
	This parameter indicates the length of time that the rocker must be operated in order to distinguish between recalling the scene and switching to programming mode. Shorter push button action than the set time: The scene is recalled. Longer push button action than the set time: The scene is switched to programming mode.

LED

Communication objects

Phys.Addr.	Program			
	no.	Object name	Function	Type
 01.01.008		20 A1 Actuator-BCU Shutter 902202		
***	***	***	***	***
 8	LED left	Status	1 Bit	
 9	LED centre	Status	1 Bit	
***	***	***	***	***

Obj	Object name	Function	Type	Flag
8	LED left	Status	1 Bit	CRW
9	LED centre	Status	1 Bit	CRW

The switching telegrams are received via the group addresses in these objects when the left and centre LEDs are used to display the switching state. If the parameter settings "On" or "Off" are selected, these objects are not displayed and have no function.

Parameters

 Rocker A	 Rocker B	 Shutter
Function of left LED	Off	
Function of centre LED	Off	

Parameters	Settings
Function of left LED	Off On Status (via separate object) Inverted (via separate object)
Function of centre LED	Off On Status (via separate object) Inverted (via separate object)

The LEDs can be parameterised as an orientation light or for status display. When the LEDs are used for status display, each LED has a separate object available. The status can also be displayed as inverted.

20 A1 Actuator-BCU Shutter 902202

Assigning parameters to the shutter output

Communication objects

Phys.Addr.		Program		
No.	Object name	Function	Type	
01.01.008	20 A1 Actuator-BCU Shutter 902202			
...
12	Shutter	Down / Up	1 Bit	
13	Louvres	Open / Closed	1 Bit	
14	Wind alarm	Shutter Up	1 Bit	
15	Shutter using dimming	Up/Down using Brighter/Darker	4 Bit	

Obj	Object name	Function	Type	Flag
12	Shutter	Up / Down	1 Bit	CW
Shutter movement (Up / Down) is initiated with this object. The shutter is raised on receipt of a logic "0" and lowered on receipt of a logic "1".				
13	Louvres	Open / Closed	1 Bit	CW
This object serves for louvre adjustment. The louvres are rotated downwards on receipt of a logic "0" and rotated upwards on receipt of a logic "1".				
14	Wind alarm	Shutter Up	1 Bit	CW
This object can be linked with a safety address e.g. from a wind sensor. In the idle state, the sensor sends a logic "0" at cyclic intervals. In the event of a wind alarm, it sends a logic "1". In this case, the shutter switch moves the shutter into the safety position and blocks the operation of the shutter. This also happens if the wind sensor fails and is therefore no longer able to send cyclical "0" signals. This object is only available if the parameter "Safety (e.g. wind alarm)" has been set to "enabled".				
15	Shutter using dimming	Up/Down using Brighter/Darker	4 Bit	CW
A dimming sensor can control a shutter via this object, whereby dimming brighter raises the shutter and dimming darker lowers the shutter. All the dimming telegrams are interpreted as an adjustment by 100%, since the actuator does not know the current position. For this reason, it is only advisable to configure the dimming sensor for "Dimming with stop telegram".				
This object is only available if the parameter "Shutter control using dim. command" has been set to "enabled". The object values of "Shutter" and "Louvres" are also inverted. This means that the object for the shutter that is controlled by a short push button action can be linked with the "Louvres" object. The louvres are thus opened by a short push button action of the upper contact of the rocker (upper -> brighter; lower -> darker).				

Parameters

LED	Rocker A	Rocker B	Shutter
Function	Shutter		
Function of louvres (step)	using object, without reverse step after stop		
Time for shutter movement	12 minutes		
Time for louvres adjustment	200 milliseconds		
Pause on change in direction	700 milliseconds		
Shutter control using dim. command	enabled (Up/Down are changed)		
Behaviour on bus voltage failure	move shutter up		
Safety (e.g. wind alarm)	enabled		
Safety position of shutter	Up		
Monitoring time	12 minutes		

Parameters	Settings
Function	Shutter Roller blind
Function of louvres (step)	using object, without reverse step after stop using object, with reverse step after stop using shutter up/down with stop telegram

The reaction to the receipt of a louvre adjustment telegram at the louvre object is set via this parameter.
 "using object, without reverse step after stop": The louvre adjustment command is carried out without a reverse step and the relay is opened once the period for louvre adjustment has elapsed.
 "using object, with reverse step after stop": The louvre adjustment command is carried out with a reverse step and the relay is opened once the period for louvre adjustment has elapsed. In this setting, the parameter for setting the delay time is displayed.
 "using shutter up/down with stop telegram": The louvre adjustment telegram is interpreted as a stop telegram for halting the shutter movement. The automatic opening of the relays is deactivated. In this setting, the louvre object changes and is displayed as a stop object.

Time for shutter movement	10; 30 seconds 1; 2; 3; 4; 5; 6; 7; 8; 10; 12; 15; 20; 25; 30; 35; 40; 60; 90; 120 minutes
---------------------------	---

This parameter indicates the duration of the shutter movement before the shutter is automatically switched off. It is not displayed if the parameter "Function of louvres (step)" is set to "using shutter up/down with stop telegram".

20 A1 Actuator-BCU Shutter 902202

Parameters	Settings
Time for louvres adjustment	50; 80; 100; 120; 140; 160; 180; 200 ; 220; 240; 260; 280; 300; 360; 400; 500; 700; 800; 1000 milliseconds
	<p>This parameter defines the period for louvre adjustment. It is not displayed if the parameter "Function of louvres (step)" is set to "using shutter up/down with stop telegram".</p>
Delay time on a direction change	50; 80; 100; 120; 140; 160; 180; 200 ; 220; 240; 260; 280; 300; 360; 400; 500; 700; 800; 1000 milliseconds
	<p>The duration of a reverse step is defined using this parameter. It is not displayed if the parameter "Function of louvres (step)" is set to "using shutter up/down with stop telegram".</p>
Pause on change in direction	10 milliseconds 40 milliseconds 70 milliseconds 100 milliseconds 200 milliseconds 400 milliseconds 700 milliseconds 1 second 2 seconds 4 seconds
	<p>The pause on change in direction is set via this parameter. The shutter remains stationary for the duration of the period. Note: The parameter must be set to the time given by the manufacturer of the shutter (generally longer than 500 ms).</p>
Shutter control using dim. command	disabled (standard) enabled (Up/Down are changed)
	<p>This parameter controls whether a 4-bit object is made available for shutter control. It is therefore possible for a dimming sensor to control a shutter, whereby dimming brighter raises the shutter and dimming darker lowers the shutter. All the dimming telegrams are interpreted as an adjustment by 100% since the actuator does not know the current position. For this reason, it is only advisable to configure the dimming sensor for "Dimming with stop telegram". If the setting "enabled" is selected, the corresponding object is displayed in the object list.</p>
Behaviour on bus voltage failure	move shutter up move shutter down STOP
	<p>This parameter indicates the behaviour of the shutter on bus voltage failure. In the event of bus voltage failure, the pause on change in direction that is normally observed is not taken into consideration.</p> <p>Note: When operating heavy shutter motors, the setting "STOP" should be selected in order to protect the relay contacts.</p>

Parameters	Settings
Safety (e.g. wind alarm)	disabled enabled
	<p>The safety function can be enabled or disabled via this parameter. The parameter must be enabled when a wind sensor is used.</p>
Safety position of shutter	Up
	<p>This parameter indicates the limit position of the shutter in the event of a safety alarm. The parameter only appears if the safety function has been enabled. The safety position cannot be changed.</p>
Monitoring time	12 minutes
	<p>The monitoring time is specified with this parameter. The safety object expects to receive cyclical telegrams ("0" signals). If the shutter actuator does not receive a signal within the monitoring period, the safety function is initiated.</p>

Roller blind

Communication objects

Phys.Addr.	Program			Type
	no.	Object name	Function	
01.01.008	20 A1 Actuator-BCU Shutter 902202			
...
12	Roller blinds	Up / Down		1 Bit
13	Roller blinds	STOP		1 Bit
14	Wind alarm	Roller blinds up		1 Bit
15	Roller blinds using dim. command	Up/Down using Brighter/Darker	4 Bit	

Obj	Object name	Function	Type	Flag
12	Roller blinds	Up / Down	1 Bit	CW
		The movement of the roller blind (Up / Down) is initiated with this object. The blind is raised on receipt of a logic "0" and lowered on receipt of a logic "1".		
13	Roller blinds	STOP	1 Bit	CW
		This object serves as a receiving object for stopping the movement of the roller blind.		
14	Wind alarm	Roller blinds up	1 Bit	CW
		This object can be linked with a safety address e.g. from a wind sensor. In the idle state, the sensor sends a logic "0" at cyclic intervals. In the event of a wind alarm, it sends a logic "1". In this case, the shutter switch moves the roller blind into the set safety position (Up or Down) and blocks the operation of the blind. This also happens if the wind sensor fails and is therefore no longer able to send cyclical "0" signals. This object is only available if the parameter "Safety (e.g. wind alarm)" has been set to "enabled".		

Application program description

October 2001

20 A1 Actuator-BCU Shutter 902202

Obj	Object name	Function	Type	Flag
15	Roller blinds using dim. command	Up/Down using Brighter/Darker	4 Bit	CW
<p>A dimming sensor can control a roller blind via this object, whereby dimming brighter raises the blind and dimming darker lowers the blind. All the dimming telegrams are interpreted as an adjustment by 100%, since the actuator does not know the current position. For this reason, it is only advisable to configure the dimming sensor for "Dimming with stop telegram".</p> <p>This object is only available if the parameter "Roller blinds control using dim. command" has been set to "enabled". The object value of the "Roller blinds" object is also inverted. This means that the object for the roller blind that is controlled by a short push button action can be linked with the "Roller blinds" object. The roller blind is thus raised by a short push button action of the upper contact (upper -> brighter; lower -> darker).</p>				

Parameters

LED	Rocker A	Rocker B	Roller blinds
Function	Roller blinds		
Automatically stop roller blinds movement	enabled		
Time for roller blinds movement	12 minutes		
Pause on change in direction	700 milliseconds		
Roller blinds control using dim. command	enabled (Up/Down are changed)		
Behaviour on bus voltage failure	move shutter up		
Safety (e.g. wind alarm)	enabled		
Safety position of roller blinds	Up		
Monitoring time	12 minutes		

Parameters	Settings
Function	Shutter Roller blind
The function of the shutter switch is set via this parameter. The parameter window changes depending on the function selected and the relevant parameters are displayed with default settings.	
Automatically stop roller blinds movement	disabled enabled
This parameter indicates whether the relay is automatically opened once the travel time for the roller blinds has elapsed. If "enabled" is selected, the parameter "Time for roller blinds movement" appears for setting the travel time.	
Time for roller blinds movement	10; 30 seconds 1; 2; 3; 4; 5; 6; 7; 8; 10; 12 ; 15; 20; 25; 30; 35; 40; 60; 90; 120 minutes
This parameter indicates the duration of the roller blind movement before the blind is automatically switched off. It is not displayed if the parameter "Automatically stop roller blinds movement" is set to "disabled".	

Parameters	Settings
Pause on change in direction	10 milliseconds 40 milliseconds 70 milliseconds 100 milliseconds 200 milliseconds 400 milliseconds 700 milliseconds 1 second 2 second 4 second
The pause on change in direction is set via this parameter. The shutter remains stationary for the duration of the period. Note: The parameter must be set to the time given by the manufacturer of the roller blind (generally longer than 500 ms).	
Roller blinds control using dim. command	disabled (standard) enabled (Up/Down are changed)
This parameter controls whether a 4-bit object is made available for controlling the roller blind. It is therefore possible for a dimming sensor to control a roller blind, whereby dimming brighter raises the blind and dimming darker lowers the blind. All the dimming telegrams are interpreted as an adjustment by 100% since the actuator does not know the current position. For this reason, it is only advisable to configure the dimming sensor for "Dimming with stop telegram". If the setting "enabled" is selected, the corresponding object is displayed in the object list.	
Behaviour on bus voltage failure	move shutter up move shutter down STOP
This parameter indicates the behaviour of the roller blind on bus voltage failure.	
Note: When operating heavy roller blind motors, the setting "STOP" should be selected in order to protect the relay contacts.	
Safety (e.g. wind alarm)	disabled enabled
The safety function can be enabled or disabled via this parameter. The parameter must be enabled when a wind sensor is used.	
Safety position of roller blinds	Up Down
This parameter indicates the limit position of the roller blind in the event of a safety alarm. The parameter only appears if the safety function has been enabled.	
Monitoring time	12 minutes
The safety object expects to receive cyclical telegrams ("0" signals). If these telegrams fail to appear, the safety function is triggered and the roller blind is moved to the safety position. The monitoring time is specified with this parameter. If the shutter actuator does not receive a signal within the monitoring period, the safety function is initiated.	

20 A1 Actuator-BCU Shutter 902202

Times

The times cannot be kept to exactly for reasons associated with the internal operating system. The following tables indicate the time bands that are applied.

Reversal in direction of movement

Time [ms]	Time from [ms]		Time to [ms]
10	9.5	-	10.0
20	19.5	-	20.0
40	39.5	-	40.0
70	69.5	-	70.0
100	99.5	-	100.0
200	192.0	-	200.0
400	392.0	-	400.0
700	696.0	-	704.0
1,000	992.0	-	1000.0
2,000	1992.0	-	2000.0
4,000	3900.0	-	4030.0

Time for louvre adjustment

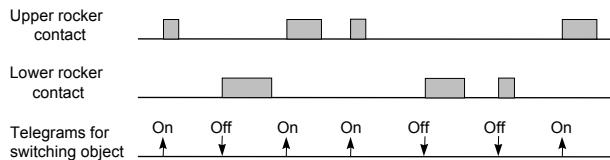
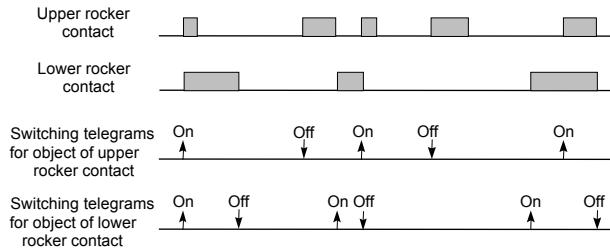
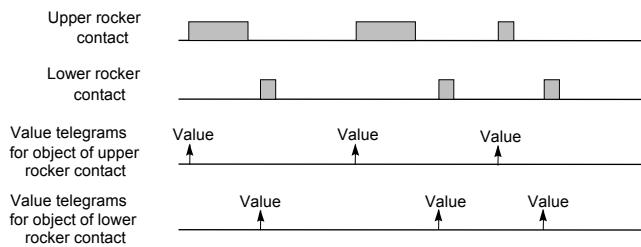
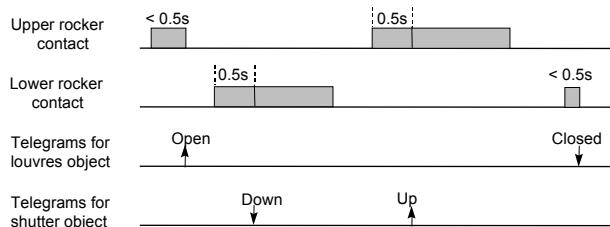
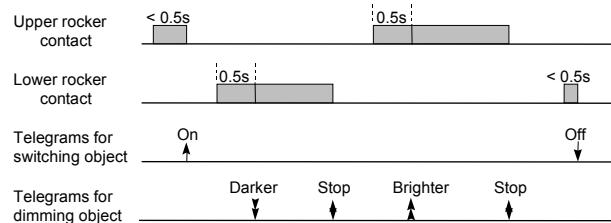
Time [ms]	Time from [ms]		Time to [ms]
50	49.5	-	50.0
60	59.5	-	60.0
70	69.5	-	70.0
80	79.5	-	80.0
100	99.5	-	100.0
120	119.5	-	120.0
140	136.0	-	144.0
160	152.0	-	160.0
180	176.0	-	184.0
200	192.0	-	200.0
220	216.0	-	224.0
240	232.0	-	240.0
260	256.0	-	264.0
280	272.0	-	280.0
300	296.0	-	304.0
330	320.0	-	328.0
360	352.0	-	360.0
400	392.0	-	400.0
500	496.0	-	504.0
600	592.0	-	600.0
700	696.0	-	704.0
800	792.0	-	800.0
1,000	992.0	-	1000.0

Travel time for shutters and roller blinds

Time [min]	Time [ms]			Time [min]
	from	-	to	
10,000	9880.0	-	10010.0	0.2 - 0.2
30,000	29900.0	-	30030.0	0.5 - 0.5
1 60,000	58800.0	-	60900.0	1.0 - 1.0
2 120,000	117600.0	-	119700.0	2.0 - 2.0
3 180,000	178500.0	-	180600.0	3.0 - 3.0
4 240,000	237300.0	-	239400.0	4.0 - 4.0
5 300,000	298200.0	-	300300.0	5.0 - 5.0
6 360,000	357000.0	-	359100.0	6.0 - 6.0
7 420,000	417900.0	-	420000.0	7.0 - 7.0
8 480,000	478800.0	-	480900.0	8.0 - 8.0
10 600,000	561000.0	-	594000.0	9.4 - 9.9
12 720,000	693000.0	-	726000.0	11.6 - 12.1
15 900,000	858000.0	-	891000.0	14.3 - 14.9
20 1,200,000	1155000.0	-	1188000.0	19.3 - 19.8
25 1,500,000	1452000.0	-	1485000.0	24.2 - 24.8
30 1,800,000	1782000.0	-	1815000.0	29.7 - 30.3
35 2,100,000	2079000.0	-	2112000.0	34.7 - 35.2
40 2,400,000	2376000.0	-	2409000.0	39.6 - 40.2
60 3,600,000	3564000.0	-	3597000.0	59.4 - 60.0
90 5,400,000	5379000.0	-	5412000.0	89.7 - 90.2
120 7,200,000	7161000.0	-	7194000.0	119.4 - 119.9

Safety times

Time [min]	Time [ms]	Time from [ms]		Time to [min]
		from	to	
2	120,000	132000.0	-	165000.0
4	240,000	264000.0	-	297000.0
8	480,000	495000.0	-	528000.0
12	720,000	726000.0	-	759000.0
20	1,200,000	1221000.0	-	1254000.0
30	1,800,000	1815000.0	-	1848000.0
45	2,700,000	2706000.0	-	2739000.0
60	3,600,000	3630000.0	-	3663000.0

20 A1 Actuator-BCU Shutter 902202**Timing diagrams: Examples for a rocker****1. Configured for switch function:
upper "On", lower "Off"****2. Configured for switch function:
upper "Toggle", lower "press: On. release Off"****3. Configured for switch function:
upper "8-bit Value", lower "8-bit Value"****4. Configured for shutter:
upper "Up", lower "Down"****5. Configured for dimming with stop telegram****6. Configured for dimming with cyclical sending**