

Motion and Presence Detector

IS 3360

V3 KNX - concealed, sq.

EAN 4007841 058173

STEINEL[®]
PROFESSIONAL



infrared sensor
360°



max. 20 m



KNX



IP20



2 - 1000 lux



1-255 min



ideal 2,5 - 4 m

TEACH

Teach mode



energy saving

5 JAHRE
HERSTELLER
GARANTIE

manufacturer's
warranty
[steinel-professional.de/garantie](https://www.steinel-professional.de/garantie)

Function description

Higher, further, faster. Infrared motion detector IS 3360 for indoors and out, ideal for watching over high spaces and large areas, such as multi-storey and underground car parks, installation height up to 4 m, 360° angle of coverage, reach 20 m max. (tangential). Available either in round or square surface-mounted and concealed version.

IS 3360

V3 KNX - concealed, sq.

EAN 4007841 058173

Technical specifications

Type	Motion and Presence Detector
Dimensions (L x W x H)	94 x 94 x 78 mm
Power supply, detail	KNX bus
Sensor Technology	passive infrared
Application, place	Outdoors, Indoors
Application, place, room	production facilities, recreation room, changing room, function room / ancillary room, sports hall, reception / lobby, stairwell, WC / washroom, multi-storey / underground car park, warehouse, Indoors
Installation site	ceiling
Installation	Concealed wiring
Switching zones	1416 switching zones
Electronic scalability	No
Mechanical scalability	No
Mounting height	2,50 – 4,00 m
Optimum mounting height	2,8 m
Detection angle	360 °
Angle of aperture	160 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Reach, radial	Ø 8 m (50 m²)

Reach, presence	Ø 3 m (7 m²)
Twilight setting TEACH	Yes
Twilight setting	2 – 2000 lx
Time setting	0 s – 1092 Min.
Constant-lighting control	Yes
Basic light level function	Yes
KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 2x, Presence output, Day / night function
With bus coupling	Yes
Settings via	ETS software, Remote control, Bus, Smart Remote
IP-rating	IP20
Material	Plastic
Ambient temperature	-20 – 50 °C
Colour	white
Colour, RAL	9010
Manufacturer's Warranty	5 years
Version	KNX - concealed, sq.
PU1, EAN	4007841058173

Accessories


EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 593018	Service remote control RC6 KNX
EAN 4007841 592912	User remote control RC7 KNX

IS 3360

V3 KNX - concealed, sq.

EAN 4007841 058173

Detection Zone

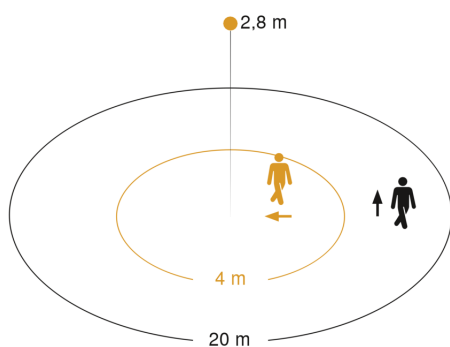

Mögliche Montagehöhe: 2,50 m – 4,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

