

sensIQ S

V3 Anthracite

EAN 4007841 059583

Article number 059583



infrared sensor 3 x
100°



3 zones scalable
2-20m



KNX



IP54



2 - 1000 lux



1 min - 15 min



ideal 2 - 5 m



Teach mode



energy saving

5 years

manufacturer's
warranty
steinel-professional.de/garantie

Function description


The evolution of perfection. The sensIQ S is just as perfect as its larger role model. For indoors and outdoors, ideal for building entrances, loading bays, for mounting heights of up to 5 m, quadruple sensor system for optimum surveillance over 3x100° coverage angle, 20 m reach (tangential), reach setting to the accuracy of a metre in 3 independent directions. Remote control and corner wall mount bracket included.

Technical specifications

| | |
|---|---|
| Type | Motion detectors |
| Dimensions (L x W x H) | 128 x 114 x 74 mm |
| Sensor Technology | passive infrared |
| Application, place | Indoors, Outdoors |
| Installation site | wall, corner |
| Installation | Surface wiring |
| Mounting height | 2 – 5,00 m |
| Reach, radial | r = 4 m (42 m ²) |
| Reach, tangential | r = 20 m (1047 m ²) |
| Reach, detail | Reach adjustable from 2 - 20 m in 3 directions (100° in each) |
| Detection angle | 300 ° |
| Angle of aperture | 180 ° |
| Optimum mounting height | 2 m |
| Mechanical scalability | Yes |
| Sneak-by guard | Yes |
| Capability of masking out individual segments | Yes |
| Electronic scalability | No |
| Twilight setting TEACH | Yes |

| | |
|----------------------------|--|
| Twilight setting | 2 – 1000 lx |
| Time setting | 60 s – 15 Min. |
| Constant-lighting control | Yes |
| Basic light level function | Yes |
| KNX functions | Light output 2x, Presence output, Light level, Constant-lighting control, Basic light level function, Photo-cell controller, Close range, Individual pyro evaluation, Logic gate |
| With bus coupling | Yes |
| Settings via | ETS software, Remote control, Bus, Smart Remote |
| With remote control | Yes |
| Interconnection | Yes |
| Type of interconnection | Master/master, Master/slave |
| Ambient temperature | -20 – 50 °C |
| Application, room | multi-storey / underground car park, outdoors, warehouse, front door, all round the building, courtyard & driveway, Indoors |
| Colour | Anthracite |
| Colour, RAL | 7016 |
| Manufacturer's Warranty | 5 years |
| Version | Anthracite |
| PU1, EAN | 4007841059583 |

Detection Zone

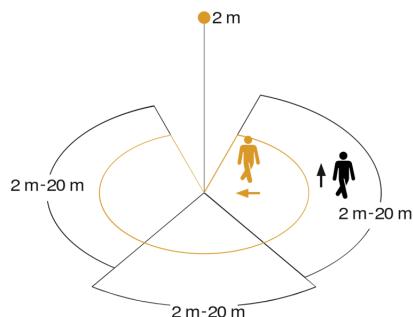

Mögliche Montagehöhe: 2,00 m – 5,00 m

Orange: radial

Schwarz: tangential

3 skalierbare Zonen

Dimension Drawing

