

Presence detector - Professional Line

IS 3360 40m

V3 KNX - concealed, sq. black

EAN 4007841 068578

Article number 068578



infrared sensor
360°



max. 20 m



KNX



IP20



2 - 1000 lux



1 - 255 min



ideal 2,5 - 4 m



Teach mode



energy saving



5 years
manufacturer's
warranty
steinel-professional.de/garantie

Function description

Higher, further, faster. Infrared presence detector IS 3360 for indoors and out, ideal for watching over high spaces and large areas, such as multi-storey and underground car parks, installation height up to 4 m, 360° angle of coverage, reach 20 m max. (tangential). Available either in round or square surface-mounted and concealed version.

IS 3360 40m

V3 KNX - concealed, sq. black

EAN 4007841 068578

Article number 068578



Technical specifications

| | |
|---|-------------------------------|
| Type | Motion and Presence Detector |
| Dimensions (L x W x H) | 78 x 94 x 94 mm |
| Power supply, detail | KNX bus |
| Sensor Technology | passive infrared |
| Application, place | Indoors |
| Installation site | ceiling |
| Installation | Concealed wiring |
| Mounting height | 2,50 – 4,00 m |
| Reach, radial | Ø 8 m (50 m ²) |
| Reach, tangential | Ø 40 m (1257 m ²) |
| Reach, presence | Ø 3 m (7 m ²) |
| Detection angle | 360 ° |
| Angle of aperture | 180 ° |
| Switching zones | 1416 switching zones |
| Optimum mounting height | 2,8 m |
| Mechanical scalability | No |
| Sneak-by guard | Yes |
| Capability of masking out individual segments | Yes |
| Electronic scalability | No |

| | |
|----------------------------|---|
| Twilight setting TEACH | Yes |
| Twilight setting | 2 – 1000 lx |
| Time setting | 5 s – 15 Min. |
| Constant-lighting control | Yes |
| Basic light level function | Yes |
| KNX functions | Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 2x, Presence output, Day / night function, Logic gate |
| With bus coupling | Yes |
| Settings via | ETS software, Remote control, Bus, Smart Remote |
| Interconnection | Yes |
| Type of interconnection | Master/slave |
| IP-rating | IP20 |
| Material | Plastic |
| Ambient temperature | -20 – 50 °C |
| Application, room | production facilities, recreation room / changing room, function room / ancillary room, sports hall, reception / lobby, stairwell, WC / washroom, multi-storey / underground car park, warehouse, Indoors |
| Colour | black |
| Colour, RAL | 9005 |
| Manufacturer's Warranty | 5 years |
| Version | KNX - concealed, sq. black |
| PU1, EAN | 4007841068578 |

Accessories

| | |
|--------------------|--------------------------------|
| EAN 4007841 593018 | Service remote control RC6 KNX |
| EAN 4007841 592912 | User remote control RC7 KNX |
| EAN 4007841 009151 | Remote control Smart Remote |


Presence detector - Professional Line

IS 3360 40m


V3 KNX - concealed, sq. black
EAN 4007841 068578
Article number 068578



Detection Zone

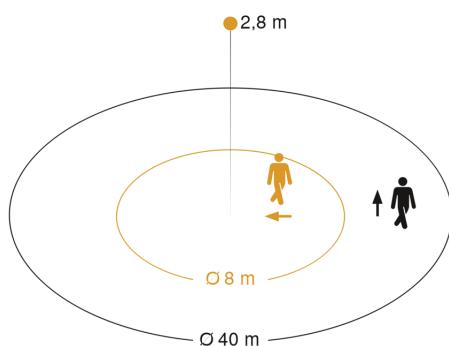

Dimension Drawing

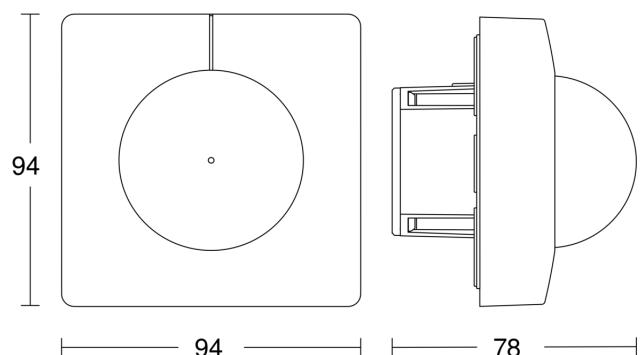

Mögliche Montagehöhe: 2,50 m – 4,00 m
Orange: radial
Schwarz: tangential