

# IR Quattro SLIM XS 4m

V3 KNX - square black  
EAN 4007841 082260  
Article number 082260

infrared sensor  
360°max. 4 x 4 m  
presence

IP20



KNX



10 - 1000 lux



ideal 2,5 - 4 m

Teach

iQ

5 years

manufacturer's  
warranty steinel-  
professional.de/  
garantie

CE

## Function description

### Technical specifications

Dimensions (L x W x H)	49 x 80 x 80 mm
Manufacturer's Warranty	5 years
Settings via	ETS software, Remote control, Bus, Smart Remote
With remote control	No
Version	KNX - square black
PU1, EAN	4007841082260
Type	Presence detector
Application, place	Indoors
Application, room	one-person office, hotel room, care room, function room / ancillary room, WC / washroom, Indoors
Colour	black
Colour, RAL	9005
Includes corner wall mount	No
Installation site	ceiling
Installation	In-ceiling installation, Ceiling
IP-rating	IP20
Ambient temperature	0 – 40 °C

Detection angle	360 °
Angle of aperture	71 °
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	No
Mechanical scalability	No
Reach, radial	4 x 4 m (16 m <sup>2</sup> )
Reach, tangential	4 x 4 m (16 m <sup>2</sup> )
Reach, presence	4 x 4 m (16 m <sup>2</sup> )
Switching zones	408 switching zones
Twilight setting	10 – 1000 lx
Time setting	60 s – 255 Min.
Basic light level function	Yes
Basic light level function time	Permanently ON, 1-255 min, all night
Main light adjustable	0 – 100 %
Twilight setting TEACH	Yes
Constant-lighting control	Yes

# IR Quattro SLIM XS 4m

V3 KNX - square black  
EAN 4007841 082260  
Article number 082260




## Technical specifications

Material	Plastic
Power supply, detail	KNX bus
With bus coupling	Yes
Sensor Technology	Passive infrared
Mounting height	2,50 – 4,00 m
Mounting height max.	4,00 m
Optimum mounting height	2,8 m

KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 4x, Presence output, Day / night function, Logic gate
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	KNX bus
Rated current	10 mA

## Detection Zone

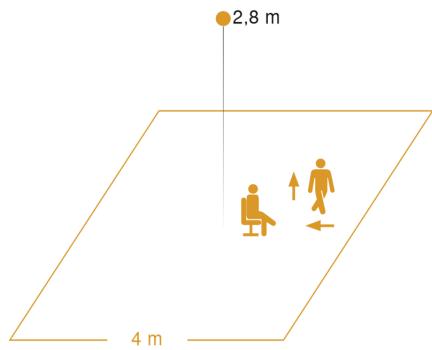

Mögliche Montagehöhe: 2,50 m – 4,00 m  
Orange: Präsenz, tangential und radial

## Dimension Drawing

