

PS 640 mA T KNX


Item no.: 9070958

theben

Home and Building control
KNX

Description

- 640 mA supply voltage
- 30 V DC auxiliary supply
- Power-supplying and monitoring of the KNX system voltage
- Reset key for 20 sec. bus reset
- Continuous short-circuit protection

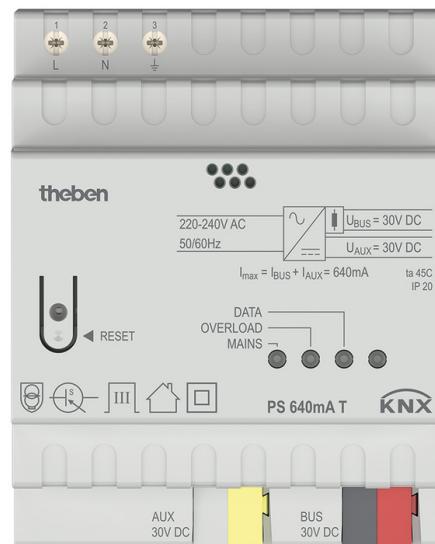

Technical data

PS 640 mA T KNX		PS 640 mA T KNX	
Operating voltage KNX	Bus voltage, ≤ 12 mA	Nominal voltage KNX	30 V DC, ± 2 V, SELV
Operating voltage	230 – 240 V AC 50 – 60 Hz	Nominal current KNX	640 mA
Frequency	50 – 60 Hz	Uninterrupted short-circuit current	max. 1.4 A
Stand-by consumption	≤ 0.8 W	Mains failure bridging time	min. 130 ms
Width	4 modules	Ambient temperature	-5°C ... 45°C
Installation type	DIN rail	Protection class	II according to EN 60 730-1
Type of connection	KNX bus terminal	Type of protection	IP 20
KNX output	1 line with integrated throttle drive		

Subject to technical changes and misprints

additional information at: www.theben.de/product/9070958



The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

PS 640 mA T KNX

Item no.: 9070958

theben

Scale drawings

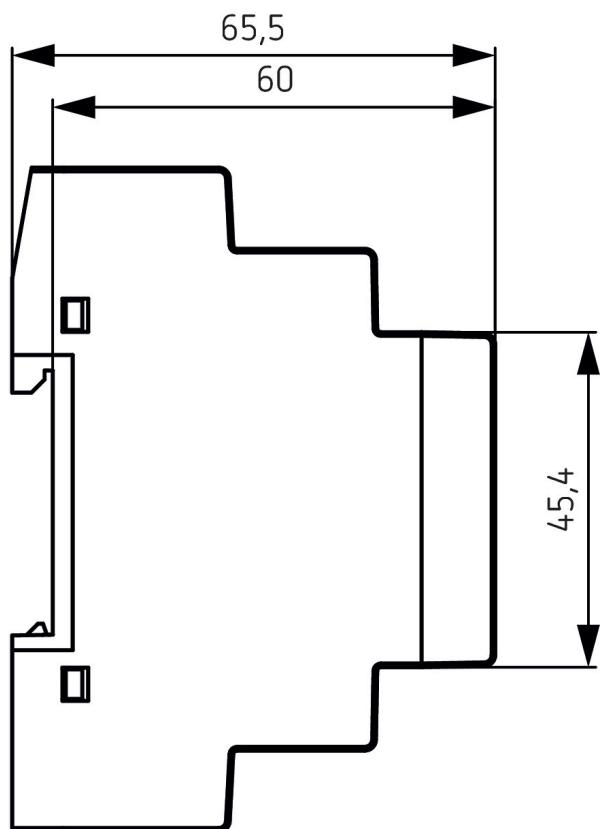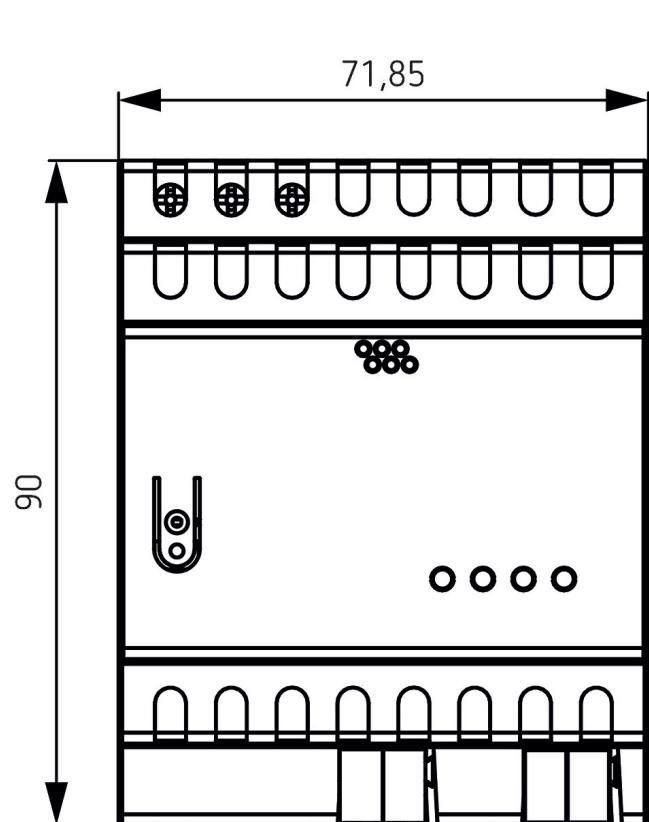

Subject to technical changes and misprints

additional information at: www.theben.de/product/9070958

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.