




Datasheet Oria Switches

EAE Oria KNX Switch Series

All you need is EAE

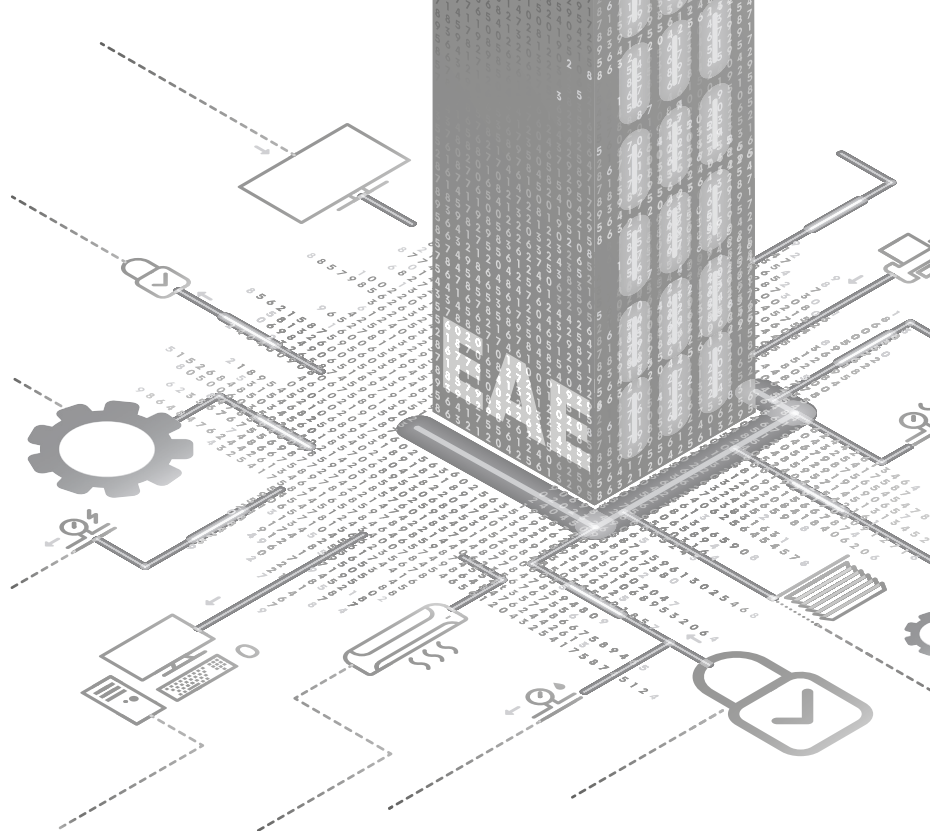

General Features




- Serial switches with plastic push-button
- Can be configured with ETS3 / ETS4 / ETS5.
- Independent button configuration for each fold
- Different color options
- Option to extend up to 6 Folds
- Easy mount into 60x60 mm standard switch junction boxes
- Dependent or independent programmable buttons
 - Switching
 - Dimming
 - Blind Control
 - Value transfer
 - Scene Control
 - Status LEDs

Technical Data

Operating Voltage	Voltage	21V... 30V DC, via the KNX bus
	Current drawn from bus	<10mA
Safety Rating Class		IP 20, DIN EN 60529 II EN 61140
Connections	KNX	Bus Connection
Operating Temperature	Ambient	-5° C + 45° C
	Storage	-25° C + 55° C
	Measurement Accuracy	±0,3 °C
Humidity	Max. Air humidity condensation	95% no moisture
Dimensions	Front Side	90 x 90 mm
	SideSurface mounted part	8.5 mm
	SideFlush mounted part	29.5 mm
Weight	73 g	
Material	Plastic, polycarbonate	
CE	In accordance with the EMC guideline and low voltage	

Functional Elements and Connections

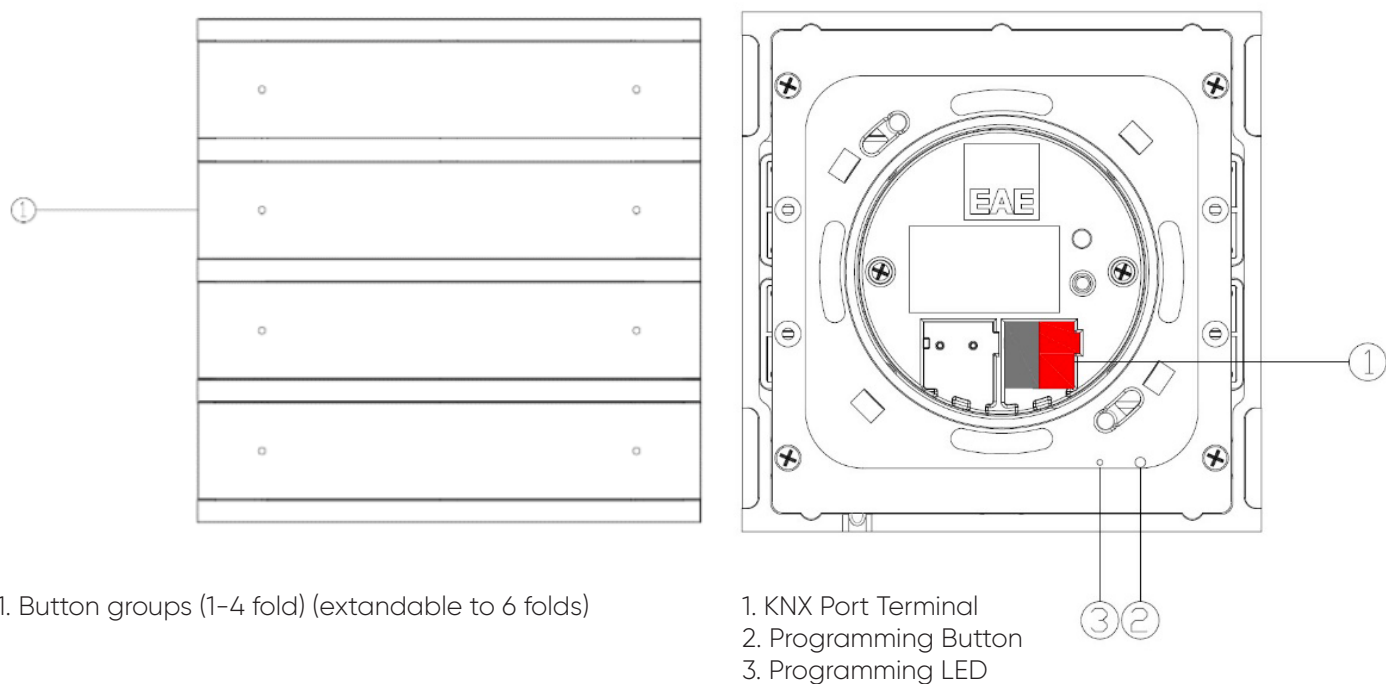

Technical Drawings

