


GLOBE LARGE

BILTON® AUFBAULEUCHTE/SURFACE MOUNTED




GLOBE LARGE eine Aufbauleuchte aus Aluminium zur punktgenauen Akzentuierung architektonischer Elemente – drinnen und draußen. Die High-Power LEDs erlauben eine hohe Lichtausbeute bei niedriger Oberflächentemperatur – auch in weiß dynamisch, RGB und Single mit verschiedenen Linsenoptiken. Eine 10 mm dicke, satinierte Sicherheitsglasabdeckung ist obligatorisch sowie dass der GLOBE LARGE komplett vergossen ist. Die Installation ist dank mitgeliefertem Montagebügel und 1 m Kabel schnell und einfach. Wie auch die Ansteuerung über die integrierte DMX Schnittstelle. Die LED-Lebensdauer beträgt bis zu 50.000 Stunden bei 30% Lichtstromrückgang.

GLOBE LARGE is an aluminium surface-mounted light fixture, and was specially designed to highlight small details or certain areas of a wall or e.g. columns or trees, indoor as well as outdoor. GLOBE guarantees a high lumen output at low surface temperatures. The 12 High Power LEDs come in White Emotion 2,700 ° K to 6,000 ° K, RGB and single colours with different view angles. The cover is a 10mm satinised safety glass, specially designed for this purpose. The wall bracket is included. GLOBE LARGE is completely sealed and the DMX interface as well as the 24V driver are integrated. LED service life is 50,000 hours at 70 % luminous flux.



Object: Privatehouse, Salzburg
Lightdesign: Lichtwerk Holper, Salzburg
GLOBE LARGE, TRIMLESS, KNX STEEL/CURVE, STELLA BOW, FRAME

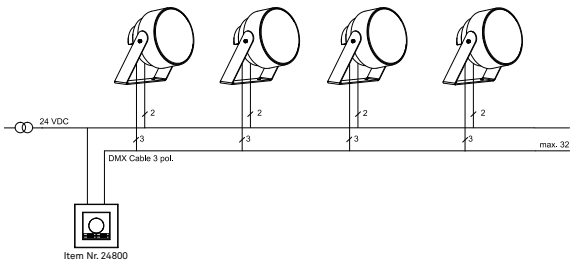

TYPES



Globe large Single 90-240V AC, 50Hz					
LED colour	mm	LEDs	W	Item Nr.	
Amber	123x80	12	1	60-412092_	
Blue	123x80	12	1	60-412093_	
Green	123x80	12	1	60-412094_	
Warmwhite	123x80	12	1	60-412096_	
White	123x80	12	1	60-412097_	



Globe large White Emotion 24V DC DMX					
LED colour	mm	LEDs	W	Item Nr.	
White Emotion	123x80	12	1	60-412891_	



Globe large RGB 24V DC DMX					
LED colour	mm	LEDs	W	Item Nr.	
RGB	123x80	12	1	60-412899_	

ANGLE °				S M F
10		Spot		
30		medium		
50		Flood		

ACCESSORIES



Stand Alone Controller				
specification	mm	page	Item Nr.	
BASE	95x95x14	90	24800	
DMX Controller				



Controller for Multicolour				
specification	mm	page	Item Nr.	
DMX address-programmer	185x43x29	108	89-4111	



Power Supply				
specification	mm	page	Item Nr.	
24V-25W-IP67		122	V0324025-IP	
24V-50W-IP67		122	V0324050-IP	
24V-100W-IP67		122	V0324100-IP	



Ground Spike		
specification	mm	Item Nr.
Ground Spike	100x250	22-120098

