

# sensIQ S

V3 black

EAN 4007841 059606

Article number 059606

 steinel



infrared sensor 3 x  
100°



3 zones scalable  
2-20m



KNX



IP54



2 - 2000 lux  
daylight operation



1 min - 15 min



ideal 2 - 5 m



Teach mode



energy saving

5 years

manufacturer's  
warranty  
[steinel-professional.de/garantie](https://steinel-professional.de/garantie)

## Function description

The evolution of perfection. The sensIQ S is just as perfect as its larger role model. For indoors and outdoors, ideal for building entrances, loading bays, for mounting heights of up to 5 m, quadruple sensor system for optimum surveillance over 3x100° coverage angle, 20 m reach (tangential), reach setting to the accuracy of a metre in 3 independent directions. Remote control and corner wall mount bracket included.

**sensIQ S**

V3 black

EAN 4007841 059606

Article number 059606

**Technical specifications**

Type	Motion detectors
Dimensions (L x W x H)	128 x 114 x 74 mm
Sensor Technology	passive infrared
Application, place	Indoors, Outdoors
Installation site	wall, corner
Installation	Surface wiring
Mounting height	2 – 5,00 m
Reach, radial	r = 4 m (42 m <sup>2</sup> )
Reach, tangential	r = 20 m (1047 m <sup>2</sup> )
Reach, detail	Reach adjustable from 2 - 20 m in 3 directions (100° in each)
Detection angle	300 °
Angle of aperture	180 °
Optimum mounting height	2 m
Mechanical scalability	Yes
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Twilight setting TEACH	Yes

Twilight setting	2 – 1000 lx
Time setting	60 s – 15 Min.
Constant-lighting control	Yes
Basic light level function	Yes
KNX functions	Light output 2x, Presence output, Light level, Constant-lighting control, Basic light level function, Photo-cell controller, Close range, Individual pyro evaluation, Logic gate
With bus coupling	Yes
Einstellungen via: Connect Bluetooth	ETS software, Remote control, Bus, Mesh
With remote control	Yes
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Ambient temperature	-20 – 50 °C
Application, room	multi-storey / underground car park, outdoors, warehouse, front door, all round the building, courtyard & driveway, Indoors
Colour	black
Colour, RAL	9005
Manufacturer's Warranty	5 years
Version	black
PU1, EAN	4007841059606

**Accessories**

EAN 4007841 608828

Corner wall mount sensIQ S

# sensIQ S


V3 black

EAN 4007841 059606


Article number 059606



## Detection Zone

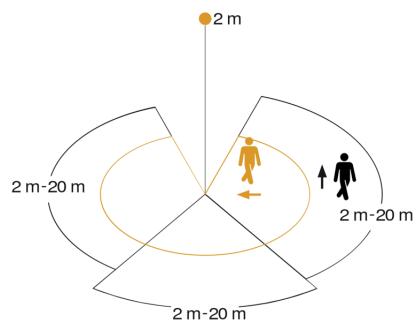

## Dimension Drawing

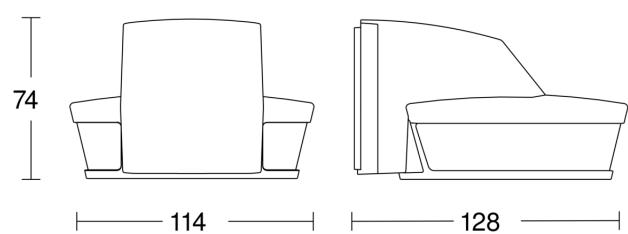

Mögliche Montagehöhe: 2,00 m – 5,00 m

Orange: radial

Schwarz: tangential

3 skalierbare Zonen